


USER MANUAL

ENGLISH - VERSION 213

DOMINO LT

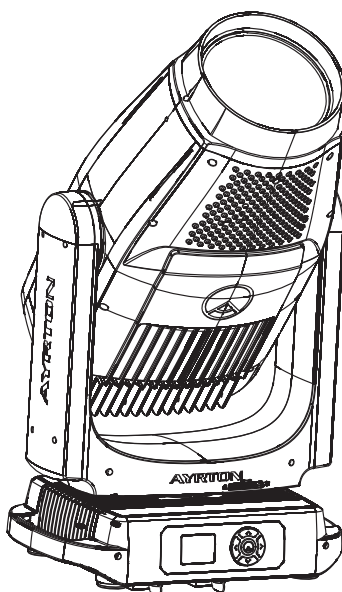

AYRTON

Digital Lighting



2 Rue de Vitruve,
91140 Villebon-sur-Yvette,
France

CONTENTS

1. SAFETY INSTRUCTIONS	3
2. FEATURES	4
3. FIXTURE OVERVIEW	4
4. DRAWINGS	4
5. INSTALLATION INSTRUCTIONS	6
6. DMX-512 CONTROL CONNECTION	6
7. DMX-512 CONNECTION WITH DMX TERMINATOR	7
8. DEVICE DMX START ADDRESS SELECTION	7
9. OPERATING INSTRUCTIONS OF THE INTERNAL DMX WIRELESS SYSTEM	7
10. DISPLAY	7
11. DMX PROTOCOL	11
12. ERROR MESSAGES	11
13. CLEANING AND MAINTENANCE	13

Keep this manual for future needs.

Errors and omissions for all information given in this user manual are possible.
All information is subject to change without prior notice.







1. SAFETY INSTRUCTIONS

1.1 > IMPORTANT SAFETY WARNINGS

This device has left the factory in perfect condition. In order to maintain this condition and to ensure safe operation, it is absolutely necessary for the user to follow the safety instructions and warning notes written in this user manual.

In order to install, operate and maintain the lighting fixture safely and correctly we suggest that the installation and operation be carried out by qualified technicians and these instructions be carefully followed.

CAUTION	
	High voltage. Risk of severe or fatal electric shock.
	Always disconnect mains supply before removing any fixture covers.
	Never look directly into the light source. Sensitive persons may suffer an epileptic shock.
	Never touch the device during operation. Covers may be hot.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a class A digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.



CAUTION

Damage caused by the disregard of this user manual is not subject to warranty. The dealer and manufacturer will not accept liability for any resulting defects or problems.

Under no circumstances should the fixture be pointed at the sun. Sunlight, combined with the high efficiency lenses used in the product can cause significant damage to the fixture.

Be aware that even when lens is not pointed directly at the sun damage may occur. It is best practice to ensure that the lens is pointed away from the sun, preferably in the opposite direction.

Always dry and clean your fixture before storing it for any length of time.

Never use any abrasive cleaning products on the fixture as this may damage the coating of the fixture impacting its anti-corrosion protection.

- If the device has been exposed to temperature changes due to environmental conditions, do not power on immediately. The resulting condensation could damage the device. Leave the device powered off until it has reached room temperature.
- Ensure the sealing rubber covers of powerCON and XLR connectors are fitted properly when the device is not in used to avoid water ingress.
- This device falls under protection-class I. Therefore, it is essential that the device be earthed.
- If either lenses or display are damaged (damage may include cracks or gashes in the material) they must be replaced.
- Electrical connections, such as replacing the power plug, must be performed by a qualified person.
- Make sure that the available voltage is not higher than that which is stated in this manual.
- Make sure the power cord is never crushed or damaged by sharp edges. If this should be the case, replacement of the cable must be done by an authorized dealer.
- If the external flexible power cord of this device is damaged, it shall be exclusively replaced by the manufacturer or their service agent or a similar qualified person in order to avoid injury.
- Before performing maintenance, always disconnect the device from the mains. Only handle the power cord from the plug. Never pull the plug out of a socket by tugging the power cord.
- When powered on for the first time, some smoke or smell may occur. This is caused by coating on metal parts when heated and is normal. If you are concerned, please contact your distributor.
- Do not focus the beam onto flammable surfaces. The minimum distance between the exiting lens of the device and the illuminated surface must be greater than 0.5 meter.

CAUTION

Please be aware that damage caused by any modifications to the device are not subject to warranty. Keep away from children and non-professionals.

1.2 > GENERAL GUIDELINES

- This device is a lighting effect for professional use on stages, in discotheques, theatres, etc. The device was designed for indoor use.
- This fixture is only allowed to be operated within the maximum alternating current as stated in the technical specifications in section 2 of this manual.
- Handle the device with care avoid shaking or using force when installing or maintaining the device.
- If you use the quick lock cam when rigging the device, make sure the quick lock fasteners are located in the quick lock holes correctly and securely.
- Operate the device only after having familiarized yourself with its functions. Do not permit operation by persons not qualified for operating the device. Most damage is the result of unprofessional operation.
- Please use the original packaging if the device is to be transported.
- The applicable temperature for the device is between -10 °C to 45 °C. Do not use the device outside of this temperature range.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

CAUTION

For safety reasons, please be aware that all modifications to the device are forbidden. If this device is operated in any way different to the ones described in this manual, the product may suffer damage and the warranty becomes void. Furthermore, any other operation may lead to short-circuits, burns, electric shocks, etc.

2. FEATURES

POWER SUPPLY

- AC100-240 V~, 50/60 Hz
- Power Consumption: 1,600 W maximum

OPTICS

- Beam aperture: 3.5 ° to 53 °
- 13-element 15:1 zoom
- 225 mm front lens cluster

LIGHT SOURCE

- LED: White LED 1050 W, 8200±400 K Color Temperature
- Extremely long Life: > 20,000H

MOVEMENT

- Highly accurate positioning
- Moving-head operated via either 8- or 16-bit resolution
- High-resolution stepper motors operated via microprocessors to ensure extreme accuracy and smooth movement
- Pan and tilt automatic repositioning
- Moving-head range: 540°/630° (pan) & 263° (tilt)

COLOURS

- CMY+CTO+CTB+CTP color mixing, uniform, linear and speed can be adjustable
- 1 fixed colour wheel: 6 dichroic filters + open, indexable

GOBO

- 2 Rotating gobo wheel: 7 interchangeable, rotating and indexable gobo + open
- "Slot in & out" gobo wheel system

FRAMING SYSTEM

- 4 individually positionable shutter blades on a 100% surface area in all positions
- Rotation of the framing system module: +/- 60 °

IRIS DIAPHRAGM

- Fast iris diaphragm with adjustable dynamic effects
- Iris range: 15% to 100% open

FROST

- Progressive linear frost for wash effect
- Light frost for erasing the edge of the beam

EFFECTS

- Graphic animation effects-wheel with continuous rotation in both directions
- CMY & RGB colour graphic animation effects-wheel with continuous rotation in both directions
- 2 combinable rotating and indexable prisms: one 5-facet circular, one 4-facet linear

DIMMER / STROBE

- Electronic dimmer from 0 to 100%
- Strobe effect: 1 to 25 flashes per second

HARDWARE FEATURES

- Graphic LCD display for addressing and special functions settings, with flip function
- 5 menu buttons to set the functions
- Excess temperature protection
- Integrated wireless CRMX TiMo™ RDM receiver from LumenRadio™

Domino LT-IP65

- IP65 XLR 5-pin male and female connectors for DMX connection
- IP65 RJ45 IN / OUT connectors for ArtNet™ connection
- IP65 PowerCON TRUE1 male connector for power connection

Domino LT-IP66

- DMX IN / OUT tails to bare end for IP66 connection

- Ethernet IN / OUT tails to bare end for IP66 ArtNet connection
- Power tail to bare end for IP66 power connection

CONTROL

- DMX 512 protocol
- DMX-RDM compatible
- Stand-alone mode, local control panel
- ArtNet™ & sACN protocol
- Choice of 3 DMX modes (from 44 to 70 DMX channels)

COOLING SYSTEM

- Advanced liquid cooling system
- Selectable ventilation user modes
- Excess temperature protection

HOUSING

- Skeleton made of die-cast aluminium
- Base in die-cast composite alloy
- Heatsinks in aluminium and copper
- Moulded covers in die-cast aluminium
- 2-side handles for transportation
- 4 heavy-duty feet for better stability
- IP65 protection rating
- Exterior finish: black (Carbon)

INSTALLATION

- 2 Omega ¼ turn brackets
- 8 ¼ turn mounting points
- Safety cable attachment point

OPERATING PARAMETERS

- Maximum permitted: 45°C (113°F)
- Minimum permitted: -20°C (-4°F)
- Minimum usage distance: 3 m (9.84 ft)

COMPLIANCE

- CE, UKCA, ETL


SIZE

- Product: 490 x 884 x 330 mm (l x h x d)
- Foam: 765 x 665 x 555 mm (l x h x d)

WEIGHT

- Product: 60 kg


3. FIXTURE OVERVIEW




- | | | |
|----------------|------------------|--------------|
| 1. Lenses | 6. Center-button | 11. Power In |
| 2. Tilt Lock | 7. Down-button | 12. RJ45 In |
| 3. Display | 8. Right-button | 13. RJ45 Out |
| 4. Up-button | 9. Pan Lock | 14. DMX In |
| 5. Left-button | 10. Handle | 15. DMX Out |

4. DRAWINGS

4.1 › FIXTURE DIMENSION

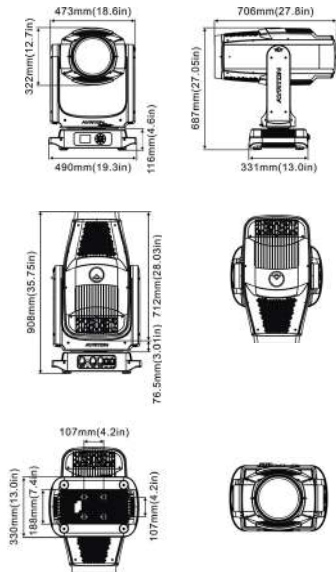


4.2 > COLOUR FILTER DIMENSION

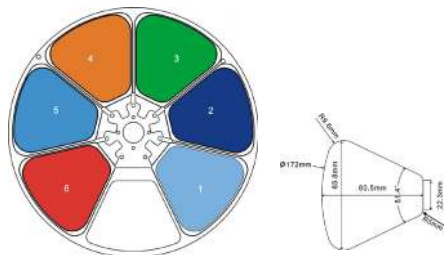

COLOUR WHEEL

1	CTB 1/4	GP60305032864
2	Congo Blue	GP60305032855
3	Green	GP60305032856
4	Orange	GP60305032857
5	Blue	GP60305032858
6	Red	GP60305032859


4.3 > ROTATING GOBO WHEELS

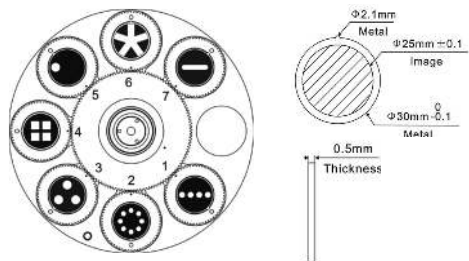

GOBO WHEEL 1

Rotating Gobo

1	314	Dot Line 4	GP60303051968
2	322	Dot Ring 8	GP60303051969
3	326	Dot Triangle 3	GP60303052026
4	332	Square Beam 4	GP60303051967
5	310	Eccentric Dot	GP60303051970
6	342	Five Spokes	GP60303052019
7	347	Beam Shaper	GP60303052020

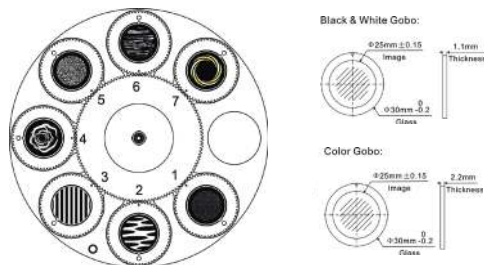


GOBO WHEEL 2

Rotating Gobo

1	074	Star Dust	GP6030301172A
2	077	Water	GP60303011871
3	275	Prison Bars	GP60303011872
4	049	Smoke Rings	GP6030301177A
5	101	Deep Forest	GP60303011182
6	105	Tree Bark	GP60303011183A
7	112Y	Nested Ring Yellow	GP60303060124

4.5 > ANIMATION WHEEL

Black & White Animation:



Color Animation:



GOBO WHEEL 2

1	Animation Colour	GP603039901200
2	Animation B&W	GP60303011871

5. INSTALLATION INSTRUCTIONS

5.1 > RIGGING THE DEVICE

CAUTION

Please consider the respective national norms during the installation. The installation must only be carried out by a qualified person.


- The installation of the support structure has to be built and constructed in a way that it can hold 10 times the weight for 1 hour without any harming deformation.
- The installation must always be secured with a secondary safety attachment, e.g. an appropriate safety rope.
- Never stand directly below the device when mounting, removing or servicing the fixture.
- The operator has to make sure the safety relating and machine technical installations are approved by an expert before taking the device into operation for the first time.
- These installations have to be approved by a skilled person once a year.
- Overhead mounting requires extensive experience, including amongst others calculating working load limits, installation material being used, and periodic safety inspection of all installation material and the device. If you lack these qualifications, do not attempt the installation yourself. Improper installation can result in bodily injury.

5.2 > RIGGING USING THE OMEGA BRACKETS

CAUTION

This step is very important to ensure safe rigging of the fixture.

- Fix the clamp to the bracket by tightening the M12 nut and bolt to the bracket through the $\Phi 13$ hole in the middle of the bracket.
- Insert the quick-lock fasteners of the first Omega holder into the respective holes on the bottom of the device. Tighten the quick lock fasteners fully clockwise.
- Install the second Omega holder.
- Pull the safety cable through the holes on the bottom of the base and over the trussing system or another suitable rigging point. Insert the end into the carabiner and tighten the safety screw.

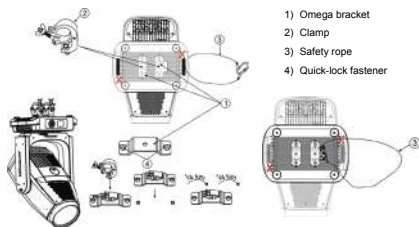


- 1) Omega bracket
- 2) Clamp
- 3) Safety rope
- 4) Quick-lock fastener

1. Omega bracket
2. Clamp
3. Safety rope
4. Quick-lock fastener

5.3 > RIGGING DRAWINGS

CAUTION


Overhead rigging requires extensive experience, including (but not limited to) calculating working load limits, specifying installation/rigging materials, and periodic safety inspection of all installation material as well as the device. If you lack these qualifications, do not attempt the rigging of this device yourself. Improper installation/rigging can result in serious bodily injury.




- Be sure this fixture is kept at least 0.1 m away from any flammable materials (decoration etc.).
- Always use and install a supplied safety cable as a safety measure to prevent accidental damage and/or injury in the event the clamp fails.
- **WARNING! Please DO NOT let other external intense lights to shine through the fixture front lens, it may cause significant internal damages!**
- When install fixture outdoor at day time (with power off), please make sure that the fixture front lens is NOT facing the sun.
- When use fixture outdoor at day time (with power on), please avoid fixture front lens facing the sun.
- When fixture is on standby outdoor at day time (with power ON and no DMX signal), please make sure the "sun protection" mode is ON (default).

6. DMX-512 CONTROL CONNECTION


Connect the provided male side of the XLR cable to the female XLR output of your controller and the female side of the XLR cable to the male XLR input of the device. You can connect multiple devices together in a serial fashion. The cable needed should be two core, screened cable with XLR input and output connectors. Please refer to the diagram below.





7. DMX-512 CONNECTION WITH DMX TERMINATOR

For installations where the DMX cable has to run over a long distance or is in an electrically noisy environment, such as in a discotheque, it is recommended to use a DMX terminator. This helps in preventing corruption of the digital control signal caused by electrical noise. The DMX terminator is an XLR plug with a 120 Ω resistor connected between pins 2 and 3, which is then plugged into the output (female) XLR socket of the last fixture in the chain. Please see illustrations below.



8. DEVICE DMX START ADDRESS SELECTION

All fixtures should be given a DMX starting address when using a DMX signal, so that the correct fixture responds to the correct control signals. This digital starting address is the channel number from which the fixture starts to "listen" to the digital control information sent out from the DMX controller. The allocation of this starting address is achieved by setting the correct address number on the display located on the base of the device.

You can set the same starting address for all fixtures or a group of fixtures, or set different addresses for each fixture individually.

If you set the same address on all devices, all the devices will start to "listen" to the same control signal from the same channel. In other words, changing the settings of one channel will affect all the fixtures simultaneously.

If you set a different address, each unit will start to "listen" to the channel number you have set, based on the quantity of control channels of the unit. That means changing the settings of one channel will affect only the selected device.

In the case of the LED moving head, in 46 channel mode, you should set the starting address of the first unit to 1, the second unit to 47 (46 + 1), the third unit to 93 (46 + 47), and so on.

9. OPERATING INSTRUCTIONS OF THE INTERNAL DMX WIRELESS SYSTEM

9.1 › EQUIPMENTS

This product is equipped with a Lumen radio Timo DMX receiver.

9.2 › MESSAGE FROM THE LED INDICATOR

- Solid Green: Logged on to a transmitter and actively receiving DMX data.
- Solid Red: Not logged on to any transmitter (available) or not receiving DMX data.

9.3 › W-DMX IN THE MENU OF THE FIXTURE

In the shortcut menu, you'll find the option "Unlink W-DMX." Selecting this will disconnect the fixture from its current transmitter.

9.4 › SETTING UP THE WIRELESS SYSTEM

To connect the fixture to a transmitter, the transmitter must be in pairing mode. You can activate this mode by selecting "Unlink W-DMX" from the fixture's menu or by performing a factory reset on the fixture.

Once the transmitter is ready, press its pairing button to link the devices.

Important Notes:

- After each job, please log out all receivers from the transmitter. This ensures the receivers return to an unassigned state and are ready for future pairings.
- Do not connect a fixture that is wirelessly linked to a transmitter to a DMX controller via cable. Doing so may cause signal interference.

10. DISPLAY

- The Display offers several features: you can set the starting address, run the pre-programmed program or reset the device.
- The main menu is accessed by double clicking (⏻) button until the display starts flashing.
- Browse through the menu by pressing (⏪), (⏩), (⏴) or (⏵) button.
- Press (⏻) for 2 seconds in order to exit menu, double click (⏻) for confirm. After accessing the edit mode, the unit will automatically exit to the main menu after 15 seconds from the last button press.
- When the unit is powered on if no data signal is connected after 1 minute then the display will switch off automatically.

DEFAULT SETTINGS SHADED - V213

Address			
Address	DMX address:001-XXX Decimal Universe:XXXXX Net:XX Sub-Net:X Universe:X Signal: DMX/WDMX/Art-Net/sACN	DMX Address setting	
Mode			
User Mode	Stand Mode Basic Mode Extend Mode Domino Mode User Mode A User Mode B User Mode C	User's mode to change channel numbers	
Edit User Mode A	Max channel PAN	Preset User modes A,B,C	
Options			
Status	No DMX Code Sun Protection Pan Reverse Tilt Reverse Pan Degree Feedback Init PAN Init TILT Prerig INIT Reset Mode Pan/Tilt Spd CMY Spd Zoom/Focus Spd Hibernation DMX Output Manual FS Mode	Close/Hold/Auto ON/OFF ON/OFF ON/OFF 630/540 ON/OFF ON/OFF ON/OFF ON/OFF Fast/All Rot Gobos Medium/Fast/Slow/FS Mode Fast/Medium/Slow Fast/Medium/Slow OFF 01M-99M ON/OFF ON/OFF	Auto run if no DMX Sun Protection Pan Reverse movement Tilt Reverse movement Pan Degree Select Movement Feedback Init PAN Init TILT Prerig INIT Reset Mode Pan/Tilt Spd CMY Spd Fast/Medium/Slow Stand by DMX Output ON/OFF

Options			
Service PIN	Service PIN	Password = XXX	Service Password *=050*
	Set IP	xxxx.xxx.xxx.xxx	Set IP
	Set Mask IP	xxx.xxx.xxx.xxx	Set Mask IP
	DHCP	ON/OFF	DHCP
	Cross Load SW	ON/OFF	Cross Load SW
	Clr Error Info	ON/OFF	Clr Error Info
Fans Control	Fans Speed	Auto Stage Silence Super Silence	Fans Speed select
	Constant Fans	ON/OFF	Constant Fans
Disp.Setting	Shutoff Time	02-60m 05m	Display shutoff time
	Flip Display	ON/OFF	Reverse 180 degree
	Key Lock	ON/OFF	Key Lock
	DispFlash	ON/OFF	DispFlash
Temp. C/F	Celsius Fahrenheit	Temperature switch between °C / °F	
Initial Pos.	PAN =XXX	Initial effect position	
Options			
Dim Curve	Square Law Linear		Dim Curve
IP from Mac	ON/OFF		
Refresh Select	12K		Refresh Select
	2.4K		
	16K		
	25K		
Gobo Correction	ON/OFF		Gobo Correction
Reset P/T Fade	ON/OFF		Reset P/T Fade
Frost (Progressive)	ON/OFF		Frost (Progressive)
Trigger	DMX Value Disp. Set to Follower	PAN.. Follower1, Follower2, Follower3 Leader/Alone	Trigger
	Auto Program		
Reset Default	ON/OFF		Restore factory set.
Reset Options	ON/OFF		Reset Options
Reset User	Address	DMX address: 001-XXX	Main
		Decimal Universe: XXXXX	
	Net: XX		
	Sub-Net: X		
Mode	Stand Mode	User's mode to change channel numbers	
	Basic Mode		
Fans Speed	Extend Mode		
	User Mode A		
Constant Fans	User Mode B		
	User Mode C		
Fans Speed	Auto	Fans Speed select	
	Stage		
Constant Fans	Silence		
	Super Silence		
Fans Speed	ON/OFF	Constant Fans	
	ON/OFF		
Info			
Time Info.	Current Time	XXXX(Hours)	
	Ttl Life Hrs	XXXX(Hours)	
	Last Run Hrs	XXXX(Hours)	
	LED Hours	XXXX(Hours)	
	Current SW Hrs	XXXX(Hours)	
	Timer PIN	Password = XXX	
	Clr Last Run	ON/OFF	

Info		
Temp Info	Head Temp.	XXX°C/XXX°F
Humidity	x%	Humidity
Fan Info	xxx RPM	Fan Info
Software Ver	V1.0.....	Software version
Network	IP, Mask, Mac	Network
Error Info.	Error Record 1	Error Info.
Test		
Home	All Pan&Tilt Color Gobo Other	Reset All Reset Pan&Tilt Color Gobo Other
Test Channel	PAN	Test function
Test		
Manual Ctrl.	PAN = XXX	Fine adjustment of the lamp
Calibration	-Password- PAN	Password "050" Calibrate and adjust the effects to standard/right position
GoboFocus Comp	Service PIN RotGobo1Single RotGobo2Single	Password "050"
Gobo Replace	Gobo Wheel 1 Gobo Wheel 2	Gobo Replace
Preset		
Select Prog.	Prog. Part 1 = Program 1 ~ 10 Program 1	Select programs to be run
	Prog. Part 2 = Program 1 ~ 10 Program 2	
	Prog. Part 3 = Program 1 ~ 10 Program 3	
Edit Prog.	Program 1	Testing program Program in loop Save and exit
	Program 10	
Edit Scenes	Edit Scene 001	Save and automatically return manual scenes edit
	~ Edit Scene 250	
Scenes Input	Pan,Tilt,..... --Fade Time-- --Scene Time-- Input By Outside	Scenes Input

10.1 > ADDRESS

10.1.1. Address

With this function, you can adjust the DMX address, the Universe and the selection of the control signal.

10.2 > MODE

10.2.1. User Mode

With this function, you can choose user defined channel orders.

10.2.1. Edit User Mode

With this function, you can edit user defined channel orders of User Mode A/B/C.

10.3 > OPTIONS

10.3.1. Status

No DMX Status

With this function, you can choose the unit behavior in case no signal is detected between Close (all dmx value to 0), Hold (keep the last dmx value), and Auto (start auto mode).

Sun Protection

When this function is activated, the unit will automatically tilt down its head toward the ground when no signal is detected.

Pan Reverse

With this function you can reverse the Pan-movement.

Tilt Reverse

With this function, you can reverse the Tilt-movement.

Pan Degree

With this function, you can select the total Pan degree range between 630 and 540.

Tilt Degree

With this function, you can select the total Tilt degree range between 270 and 540.

Feedback

This function allows you to activate or deactivate the automatic repositioning of the Pan & Tilt in case of an accidental/manual move of the yoke.

Init PAN

This function allows you to deactivate the Pan movement.

Init TILT

This function allows you to deactivate the Tilt movement.

Prerig INIT

Allows you to activate a special initialisation process: Pan reset then Tilt reset process when unit is used in prerig trusses.

Reset Mode

This function allows you to choose the reset process for the gobo.

- **Fast** : The fixture only check the direction of the first gobo
- **All Rot Gobo** : The fixture is checking all the position of each gobo to make sure all the gobo are in the same position (Useful if using a custom Gobo)

Pan/Tilt Spd

With this function, you can select Pan & Tilt speed from "Medium", "Fast", "Slow" and "FS Mode".

CMY Spd

With this function, you can select CMY speed from "Fast", "Medium", "Slow".

Zoom/Focus Speed

With this function, you can select Zoom/Focus speed from "Fast", "Medium", "Slow".

Hibernation

The device and stepper motors will be powered off if the unit stays without DMX signal for the User defined times (in Minutes). The fixture will perform a reset sequence once DMX is back.

DMX Output

With this function, the unit can transmit the signal received via WDMX or ArtNet/sACN through the DMX output.

10.3.2. Service PIN**Password**

The Password for this function is "050".

Set IP

This function allows you to set the IP of the Unit.

Set Mask IP

This function allows you to set the IP Mask of the Unit.

DHCP.

This function allows you to enable or disable the DHCP.

Cross Load SW

This function allows you to upload the current SW version to other units using a DMX connection. Do not disconnect the units before the process is complete.

Clr LED Timer

This function allows you to clear the error info list.

Clr Error Info

This function allows you to clear the error info list.

10.3.3. Fans Control**Fans Speed**

With this function, you can set the fans speed. Settings are Auto, Stage, Silence, and Super Silence.

- **Auto**: The LED module delivers **high output** and the fans ramp up and down depending on the ambient temperature and the temperature of the LED module itself.
 - **Stage**: The LED module delivers **full output** and the fans remain at full speed regardless of the temperature of the LED module.
 - **Silence**: The LED module is limited to **medium output** and the fans rotate at a slower speed.
 - **Super Silence**: The LED module is limited to a **lower output** and the fans rotate at the slowest speed.
- For specific output details, refer to photometry document.

Constant Fans

Enables you to set the fans to run continuously, even when the LED is off.

10.3.4. Disp. Setting**Shut off Time**

With this function, you can select the delay before the LCD display turns off. Choose between 2 to 60 minutes. The default is 5 minutes.

Flip Display

With this function you can rotate the display by 180° (when the unit is rigged).

Key Lock

With this function you can activate the automatic key lock function. If this function is activated, the keys will be locked automatically after exiting the edit mode for 15 seconds. keeping press the <MODE/ESC> key for 3 seconds if you do not need this function.

DispFlash

With this function activated, display will flash if no signal is detected.

10.3.5 Temperature C/F


With this function you can display the temperature in Celsius or Fahrenheit.

10.3.6. Initial Pos.

With this function you can display initial effect position.

10.3.7. Dim Curve

With this function you can select the Dimmer Curve.



10.3.8. Refresh Select

With this function you can select the PWM rate.

- 12K & 2.4: provides superior dimming quality, especially for smooth fadeouts at lower levels
- 16K & 25K: are ideal for broadcast use

10.3.9. Gobo Correction

This function allows you to enable or disable the Gobo Correction. The Unit will automatically insert a correction filter when a glass gobo is inserted.

10.3.10. Reset P/T Fade

This function allows you to choose the reset speed of the pan/tilt motors to avoid fast movement.

10.3.11. Frost (Progressivie)

This function allows you to enable or disable the progressive insertion of the frost.

10.3.12. Trigger

DMX Value Disp.

With this function you can display the DMX 512 value of each channel. The display automatically shows the channel with a value changing.

Set to Follower

With this function, you can define the device as follower.

Auto Program

With this function, you can run the internal program. You can select the desired program under "Select program". You can set the number of steps under "Edit program". You can edit the individual scenes under "Edit scenes". With this function, you can run the individual scenes either automatically, i.e. with the adjusted Step-Time.

10.3.13. Reset User

With this function, you can define the following "restore user" values:

- Address
- Mode
- Fans Speed
- Constant Fans

10.4 > INFO

10.4.1. Time Info.

Current Time

With this function, you can display the temporary running time of the device from the last power on. The display shows "XXXX". "XXXX" stands for the number of hours. The counter is reset after turning the device off.

Ttl Life Hrs

With this function, you can display the running time of the device. The display shows "XXXX". "XXXX" stands for the number of hours.

Last Run Hrs

With this function, you can display last the running time of the device. The display shows "XXXX". "XXXX" stands for the number of hours.

LED Hours

With this function, you can display the time of LED. The display shows "XXXX". "XXXX" stands for the time of LED.

Current SW Hrs

With this function, you can read the software running time of the device. The display shows "XXXX". "XXXX" stands for the number of hours.

Timer PIN

With this function, you can display the timer password.

Clr Last Run

With this function, you can clear last run time of the fixture. The display shows "ON" or "OFF". Press "Enter" to confirm.

10.4.2. Temps. Info

With this function you can display the different temperature of the fixture.

- L: Light engine
- B: Base
- H: Head

10.4.3. Humidity

With this function you can display all the different humidity values available in the fixture

- B: Base
- H: Head

10.4.4. Fan Info.

With this function, you can display all the fan speed values available in the unit.

10.4.5. Software Ver

With this function, you can display the software version of the device.

10.4.6. Network

With this function, you can display the Network information.

10.4.7. Error Info

With this function, you can Read the error record of the Unit.

10.5 > TEST

10.5.1. Home

With this function you can reset the device. You can select which functions you want to reset by using the submenu.

10.5.2. Test Channel

With this function you can test each channel's function to ensure correct operation.

10.5.3. Manual Control

Allows you to manually control each feature of the unit

10.5.4. Calibration

With this function, you can calibrate and adjust the effect wheels to their correct positions. The password of calibrate values is 050.

10.5.5. GoboFocus Comp

This function allows you to calibrate the Gobo compensation for each gobo individually. This is useful to make all the gobo on the same wheel sharp with the same dmx value.

10.5.6. Gobo Replace

This function allows you to select the gobo you want to replace. The chosen gobo will be rotated into position, making it easy to swap out.

10.6 > PRESET

Run the auto program: A leader fixture can output to three different program signals to the follower fixture to operate. It means the host will send cyclically in the following orders (The host will keep operating the program of Part 1). Then the follower fixture will make the selectively receiving according to its own set.




- If the follower fixture chooses Run For Follower 1 from the menu of 1-3, then it will receive the part 1's automatic program from link, in the same way, when the follower fixture chooses Run For Follower 2, then it will receive the part 2's automatic program from link.
- Enter the menu of 1-3 Function Mode---Set To Follower. Here to set machine operate which part of the program during the host-follower connection
- Enter the menu of 1-4, 1-5 Function Mode---Set To Leader
- Enter the menu of 8-1 Edit Program---Auto Program Part1. The host outputs three groups driven program---Part1, Part2, Part3 (Part1 program runs the same effect as the host)
- Enter the menu of 8-2 Edit Program---Edit Program. Edit the program's connection, connect the scene in order
- The editor of the scene, there are as many as 250 scenario editors, and every scene can have a program connection of 10.

Note:

Part 2, Part 3 repeat in accordance with the Part1's repeat. For example: When Part 1 uses Program 2, Part 2 uses Program 4, Part 3 uses Program 6, Assume: Program 2 includes scene of 10, 11, 12, 13. Program 4 includes scene of 8, 9, 10; Program 6 includes scene of 12, 13, 14, 15. Then it will run as below.

Example:

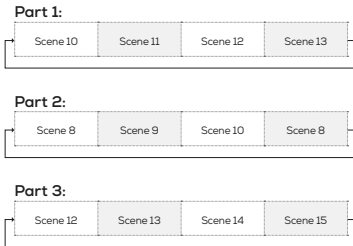

10.7 > SHORTCUT MENU

10.7.1. Flip display

With this function you can rotate the display by 180° (when the unit is rigged)

10.7.2. Restore Factory

With this function, you can restore default setting (highlighted value in the above chart).

10.7.3. Restore User

With this function, you can restore User settings (Setting can be edit under Options/Reset User Set).

10.7.4. Rst Options

This function restores only the altered options settings (highlighted values in the chart above) to their default state.

10.7.5. Unlink WDMX

This function allows you to disconnect the fixture from its current WDMX transmitter.

10.7.6. Rst DMX addr 1

With this function you can only set the address to 1.

11. DMX PROTOCOL

Scan the QR code on the cover page to download the DMX CHART.

12. ERROR MESSAGES

When you turn on the device, it will first perform a reset. The display may show "Err channel is XX" should there be problems with one or more functions. "XX" stands for channel 1, 2, 3, 4, 5, 6 etc whose sensor has encountered a problem. For example, when the display shows "Err channel is Pan movement", it means there is an error on channel 1. If there are errors on channel 1, channel 3, channel 6 at the same time, you may see the error message, "Err channel is Pan movement"; "Err channel is Tilt movement"; "Err channel is Shutter", flash twice, and then the device will generate a second reset. If the error messages persist after performing a reset more than twice, the channels which have errors may not work properly however, all other functions can work as usual. Please contact your dealer or manufacturer for service. Self repair is not allowed.

PAN- movement Er

(PAN- yoke movement error) This message will appear after the reset of the fixture if the yoke's magnetic-indexing circuit malfunction (Optical Sensor or Magnetic Sensor fails) or the stepper motor is defective (or its driving IC on the main PCB). The PAN-movement is not located in the default position after the reset.

TILT- movement Er

(TILT- head movement error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions ((Optical Sensor or Magnetic Sensor fails)) or the stepper motor is defective (or its driving IC on the main PCB). The TILT-movement is not located in the default position after the reset.

Zoom wheel Er

(Zoom wheel error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (Optical Sensor or Magnetic Sensor fails) or the stepper motor is defective (or its driving IC on the main PCB). The Zoom -movement is not located in the default position after the reset.

Focus 1 wheel Er

(Focus 1 wheel error) This message will appear after the reset of the fixture if the head's magnetic indexing circuit malfunctions (Optical Sensor or Magnetic Sensor fails) or the stepper motor is defective (or its driving IC on the main PCB). The Focus 1 movement is not located in the default position after the reset.

Focus 2 wheel Er

(Focus 2 wheel error) This message will appear after the reset of the fixture if the head's magnetic indexing circuit malfunctions (Optical Sensor or Magnetic Sensor fails) or the stepper motor is defective (or its driving IC on the main PCB). The Focus 2- movement is not located in the default position after the reset.

Color wheel Er

(Color wheel error) This message will appear after the reset of the fixture if the head's magnetic indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Color movement is not located in the default position after the reset.

Cyan Color wheel Er

(Cyan Color wheel error) This message will appear after the reset

Frost 1 wheel Er

(Frost 1 wheel - error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Frost 1 - movement is not located in the default position after the reset.

Frost 2 wheel Er

(Frost 2 wheel - error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Frost 2 - movement is not located in the default position after the reset.

Animation_Rot 1 wheel Er

(Animation_Rot wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Animation_Rot - movement is not located in the default position after the reset.

Animation_Rot 2 wheel Er

(Animation_Rot wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Animation_Rot - movement is not located in the default position after the reset.

Further instructions depending on the installation location and usage have to be adhered to by a qualified installer and any safety concerns have to be removed.

In order to ensure the device remains in good condition and does not fail prematurely, we suggest regular maintenance

- Clean the outside lens each week to avoid loss of output due to accumulation of dust/ dirt on the lens
- Clean the fans each week to ensure maximum airflow and efficient thermal cooling This will ensure the light source is operated in the best possible condition
- A detailed electrical check by an approved electrician every quarter to make sure that the circuit contacts are in good condition This will prevent poor circuit contacts and the resultant overheating

We recommend frequent cleaning of the device. Please use a moist, lint- free cloth. Never use alcohol or solvents. Please refer to the instructions under "Installation instructions". Should you need any spare parts, please order genuine parts from your local dealer.

13. CLEANING AND MAINTENANCE

CAUTION



Disconnect from mains before starting maintenance operation



Always run an IP test using the Ayrton IP test kit following any maintenance operation! Failure to comply with this clause will void the warranty!



Ayrton IP Kit

The operator must follow strictly the vacuum and pressure setting values as below, or use the corresponding preset fixture menu to run the IP test. any overpressure operation may cause accidental damage or injury.

	Minimum value		Maximum value		Steady time (Hold time)
	Kpa	Psi	Kpa	Psi	
Vacuum	-35	-5.08	-40	5.80	10
Pressure	25	3.63	30	4.35	10

Note: Once the covers removed and before set them back, check the cover gasket to avoid any leak due to gasket damage. Cross tightening the die-casting covers HEX screws at the right torque value.

Use a Torque Screwdriver set at 14Kgf.cm (1.4 Nm) for metal cover or 7Kgf.cm (0.7 Nm) for plastic cover.

The following points have to be considered during inspection:

- All screws for installing the devices or parts of the device have to be tightly connected and must not be corroded.
- There must not be any deformations to the housing, lenses, rigging and installation points (ceiling, suspension, trussing).
- Motorized parts must not show any signs of wear and must move smoothly without issue.
- The power supply cables must not show any damage, material fatigue or sediment.



AYRTON

Digital Lighting

