


LED Integrated CCT UGR<19 Batten

- Colour selectable with a choice of 3000K, 4000K or 6000K
- 36 in 1 fitting with plug-in emergency packs, Microwave and PIR on/off sensors available, along with a Dali Dimming version
- The ideal replacement for Single/Twin Fluorescent T8 and T5 Fixtures
- Perfect for schools, universities & hospitals where a flexible wattage, selectable colour batten is required
- Suitable for food environments
- Special high light transmission frosted polycarbonate diffuser for smooth uniform lighting with reduced glare
- Tool-free termination
- Shatterproof



Quality Assured Product Warranty ¹ 7 Year	On site Warranty ¹ 2 Year	Colour Rendering Index ² 85	Lumens Maintenance Ratio ³ L80 B10	Water & Dust Protected IP40	Impact Rating IK8	Low Unified Glare Rating UGR <19	Operating Hours 50,000
--	--	--	---	---------------------------------------	-----------------------------	---	----------------------------------

Technical Specification	
Construction	Steel Body / Polycarbonate Diffuser
Driver	Tridonic
LED Chip	Samsung
Input Voltage	220 - 240V
Power Factor	> 0.9
Operating Temp	-30°C to +35°C / Emergency version min temp -5°C
Standard	CE & UKCA

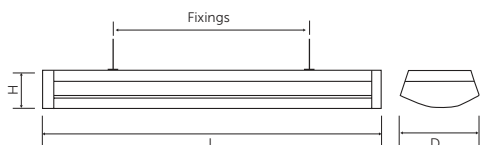

technical@bellighting.co.uk
sales@bellighting.co.uk



7 Year Gold Warranty

Code	W	Description	Lm	Temp	LxHxD Fixings (mm)
10285V2	20/27/33/38W	Wattage Switchable LED Batten CCT, 1200mm (4ft)	2670-5140	3/4/6000K	1200x97x200 1000
10286V2	25/34/40/48W	Wattage Switchable LED Batten CCT, 1500mm (5ft)	3270-6480	3/4/6000K	1500x97x200 1300
10281	-	Plug in Emergency Pack for above	-	-	-
10282	-	Plug in Microwave Sensor On/Off for above	-	-	-
10293	-	Plug in PIR for above	-	-	-
10294	-	Remote Control for CCT Battens (PIR only)	-	-	-
91359	-	Plug In Self Test pack for CCT Battens	-	-	-