

CHARGING STATION

165W Fast Charging Station



TOBENONE

THANK YOU!

Thank you for purchasing TobenONE 165W Charging Station! The 165W Charging Station all-in-one fast charger, with 3 USB-C (dual 100W + 65W) 1 USB-A (18W) and lightning port combo, meets all-scenario power needs. This 165W Charging Station works seamlessly with most mainstream devices on the market, including MacBook, iPad, iPhone, Switch, and USB-C laptops. Whether you're in the office, at home, or on the go, it keeps all your devices fully charged. Moreover, the product is made of PC fire-resistant material with a fire rating of V-0. Please continue reading below for more details.

If you find the font size in our manual too small, please contact our customer service at support@tobenone.com with your product model, and we will send you a digital version of the manual for your convenience. Scan the QR Code to Receive a 2-Year Warranty.



Simplicity Power Elegance

1

Power Output

Charging Scenarios	Port	Output Power
One Port Charging	USB-C1	100W
	USB-C2	100W
	USB-C3	65W
	USB-A	18W
Two Port Charging	USB-C1+USB-C2	65W+30W
	USB-C1+USB-C3	100W+65W
	USB-C1+USB-A	65W+18W
	USB-C2+USB-A	7.5W+7.5W
	USB-C2+USB-C3	100W+65W
Three Port Charging	USB-C3+USB-A	65W+18W
	USB-C1+USB-C2+USB-C3	65W+30W+65W
	USB-C1+USB-C2+USB-A	65W+7.5W+7.5W
Four Port Charging	USB-C1+USB-C3+USB-A	65W+65W+18W
	USB-C1+USB-C2+USB-C3+USB-A	65W+7.5W+65W+7.5W

2

Product Description

1. Port Power Output

When only one port is connected, the power of the USB-C1 port, USB-C2 port, USB-C3 interface and USB - A port is 100W, 100W, 65W and 18W respectively. The output power of the product depends not only on the power of individual ports, but also on the output power of combined ports and the input - capable power of the terminal devices. For more details, please refer to the power output table.

2. USB-C Cables

All USB-C ports come with a non-detachable USB-C cable (0.8m in length). When using the USB-C cable, it can be stretched to any length (But not exceeding 0.8m at maximum). To retract the cable, keep it in a loose state and then gently pull it once, and the cable will retract completely.

3


3. Lightning Adapter

Please note that the Lightning connector is detachable and has a magnetic function. When you are not using it, please correctly attach the Lightning connector to the product. Incorrect orientation will prevent magnetic attachment. The charging power of the Lightning connector is limited by itself, with a maximum of 27W.

4



Ports And Connectors

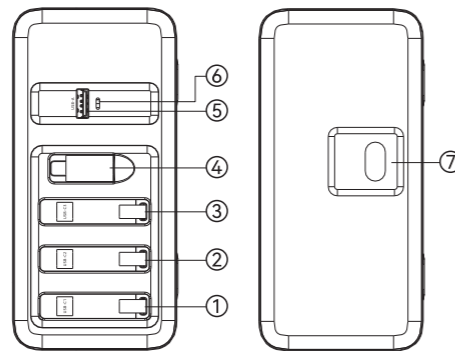

5

The maximum output power when only one port is connected is:

- ① USB-C1 out put: 100W
- ② USB-C2 out put: 100W
- ③ USB-C3 out put: 65W
- ④ Lightning out put: 27W
- ⑤ USB-A out put: 18W
- ⑥ Power LED: The indicator will only light up normally when the included cable is connected to ⑦
- ⑦ AC-IN

NOTE: USB-C1, USB-C2, and USB-A are located on the same circuit board with a total power output of 100W; USB-C3 is housed on a separate circuit board with a fixed power output of 65W.

6

Attention

Read all the instructions before using the product.

If the product occurs abnormality of use, please contact our after-sales service, DO NOT disassemble it without authorization.

Please make sure the connection port of the device is dry, clean and complete before use.

Please use the product correctly on the appropriate voltage and setting. If there is a voltage requirement, it will be reflected in the label of the product itself. Please use it under the input conditions specified by the charger. If the charger is not used for a long time, please unplug the charger. Please apply to equipment that meets the charging output specification, Do NOT modify and use.

Keep away from the children, and minors must use the products under the guidance of adults.

7

Any Questions, We Are Here To Help!

Email: support@tobenone.com

The Only Question We can't Fix Is The One We Don't Know