


UGREEN

10-in-1 Thunderbolt™ 5 Docking Station

Model: U712

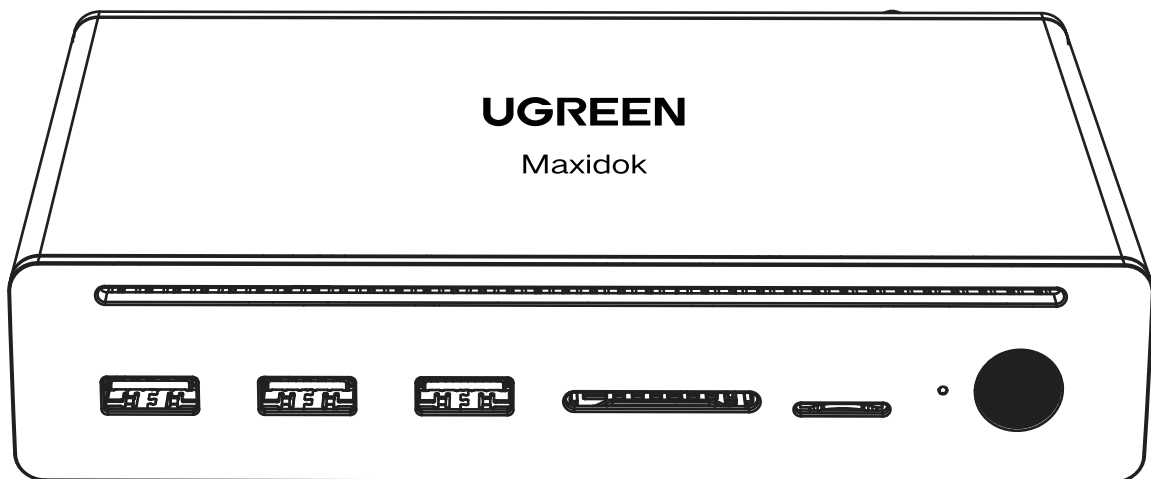

CONTENTS

1. Product Overview

- 1.1 Interface Layout
- 1.2 Input & Output Specifications

2. Video Output Modes

- 2.1 For Windows OS
- 2.2 For macOS

3. Video Resolution and Refresh Rates

- 3.1 High-Resolution Settings
- 3.2 High-Refresh Rate Settings

4. Using the Product

5. Specifications & Safety Warnings

- 5.1 Specifications
- 5.2 Safety Warnings

6. Troubleshooting

- 6.1 Cannot Connect to the Laptop or Stops Working Intermittently
- 6.2 Cannot Connect to a Monitor or Dual/Triple Monitors
- 6.3 USB-A port Stops Working or Functions Intermittently
- 6.4 SD Port or Micro SD Port is not Working
- 6.5 What to Do If the Docking Station's Wired Ethernet Port Fails to Connect to the Network?


7. FAQ

- 7.1 Compatibility Related
- 7.2 Display Related
- 7.3 Charging Related
- 7.4 Safety Related

8. Technical Support

1. Product Overview

1.1 Interface Layout

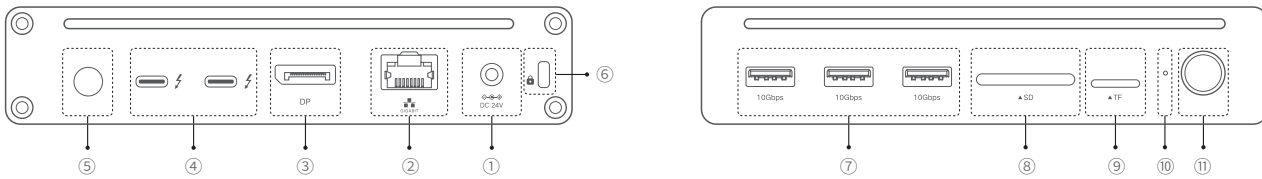

No.	Port	Description
①	DC Input	Connect to the provided power adapter.
②	Ethernet Port	Connect to an Ethernet network with a speed of up to 1000Mbps. Note: <ul style="list-style-type: none"> Actual internet speed depends on the service speed provided by your internet service provider (ISP). During the process of high-speed data transmission via data ports, the actual internet speed may decrease.
③	Display (DP) Port	Connect to DP monitor, with a maximum resolution of up to 8K. Note: <ul style="list-style-type: none"> Display output performance is limited by the capabilities of both the host device and the connected monitor's specifications. Refer to the Video Resolution and Refresh Rate table for details.
④	Thunderbolt 5 Downstream Port × 2	Connect external hard drives or monitors that support Thunderbolt / USB-C DP Alt Mode, with a maximum resolution of up to 8K. Note: To achieve maximum resolution, the connected device must support 8K. <ul style="list-style-type: none"> Charge your devices at up to 15W. Support data transfer via Thunderbolt 5 / 4 (over USB-C) and USB-C ports for USB 3 / USB 4. Support video streaming via Thunderbolt 5 / 4 (over USB-C) and USB-C DP Alt Mode.
⑤	Thunderbolt 5 Upstream Port (with computer icon)	<ul style="list-style-type: none"> Connect your laptop using the provided Thunderbolt 5 cable. Provides charging for your laptop at up to 110W Max. When connecting to a downstream port, the charging power is dynamically allocated, and the charging power of the upstream port will decrease.
⑥	Security Lock	Prevents the device from being stolen or moved without authorization.
⑦	USB-A 3.2 Port × 3	Each port provides a data transfer speed of up to 10Gbps.
⑧	SD Card Reader	<ul style="list-style-type: none"> Insert compatible SD/TF cards (Dual-Slot Concurrent Access). Provides data transfer speeds of up to 170MB/s, compatible with SD/SDHC/SDXC/micro SD(TF)/micro SDHC/micro SDXC
⑨	TF Card Reader	
⑩	Indicator	<ul style="list-style-type: none"> Green Light On: The docking station is normally powered but not connected to any host device. Blue Light On: The docking station is successfully connected to a host device. Light Off: The docking station is powered off (no power supply). Green Light Flashing: Indicates abnormal power supply (e.g., unstable voltage or connection). Blue Light Flashing: Signifies a CC protocol communication failure, typically caused by power supply issues with downstream devices.
⑪	Power Button	Press once to power on/off.

1.2 Input & Output Specifications


Type	Port	Description
Input	DC Input	24V 5.83A, 140W
Output	Thunderbolt 5 Upstream Port	5.0V 3.0A, 15.0W / 9.0V 3.0A, 27.0W / 15.0V 3.0A, 45.0W / 20.0V 4.8A, 96W / 28V 3.92A, 110W max
	Thunderbolt 5 Downstream Port	5.0V 3.0A, 15.0W (15.0W Max)
	USB-A Port	5.0V 0.9A, 4.5W (4.5W Max)

2. Video Output Modes


! **Note:** The images below are for reference only. You can customize the settings on the laptop for different output modes.

2.1 For Windows OS


1. Via Thunderbolt 5 laptops

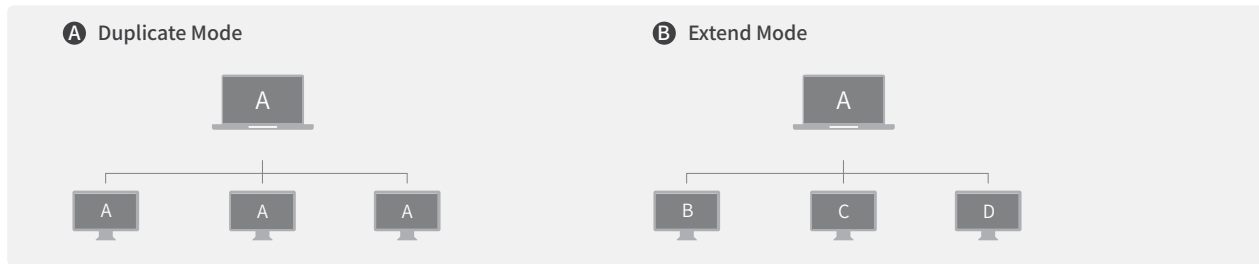

2. Via Thunderbolt 4 & USB 4 laptops

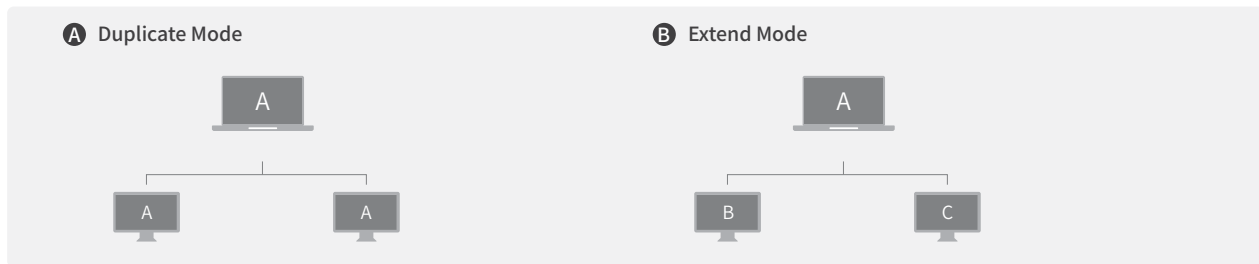


3. Via USB-C DP Alt Mode laptops

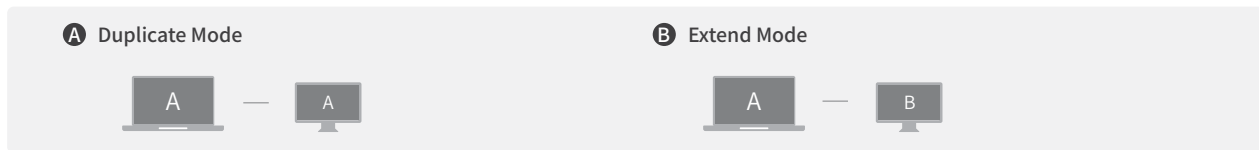


2.2 For macOS


1. For M5 Pro / M5 Max with macOS 15 or later

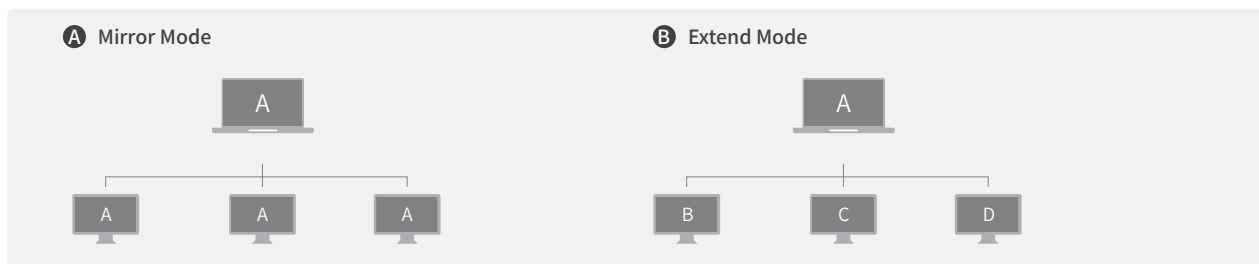

2. For M5 Standard, M4 Standard/Pro/Max, M3 Pro/Max, M2 Pro/Max, M1 Pro/Max, with macOS 15 or later

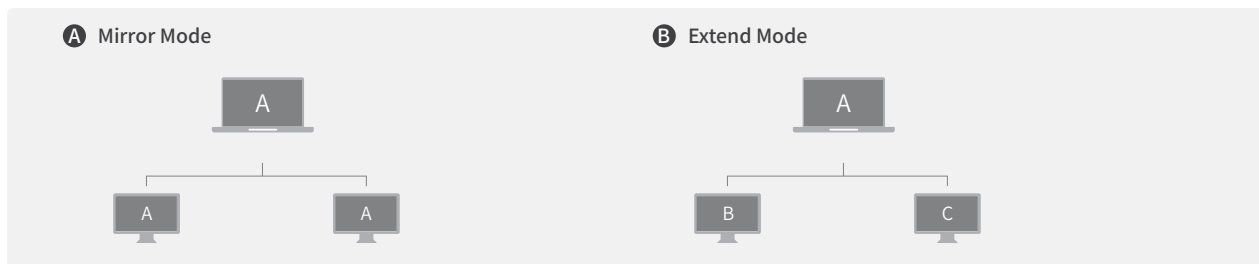

3. For M1 / M2 / M3 Standard with macOS 15 or later

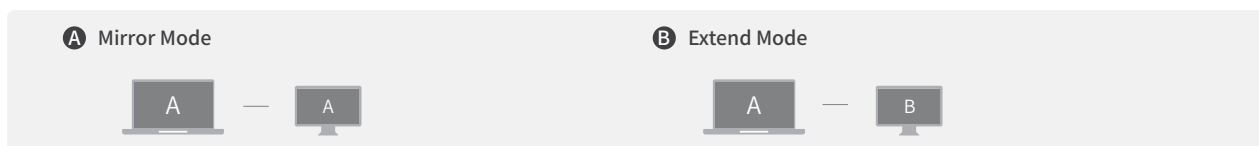

3. Video Resolution and Refresh Rates

1. The table below shows the maximum supported specifications for this docking station. Actual display output may vary depending on the host devices and connected cables.
2. MacBooks connected to this docking station need to be running macOS 15 or above.
3. Some specific USB 4 laptops do not support connecting dual monitors via the docking station.
4. "/" means the devices are not supported.
5. When using USB-C to DP or USB-C to HDMI cables, ensure the cables' maximum supported resolution and refresh rates are \geq the target output resolution and refresh rate.
6. Outputting dual 8K@60Hz displays or triple 4K@120Hz displays may impose significant load on the host computer's resources. This could potentially result in slow performance or unexpected system restarts.

3.1 High-Resolution Settings


Host Device	Host Port / Model	Single Display	Dual Display	Triple Display
Windows Laptop	Thunderbolt 5	8K@60Hz	8K@60Hz	4K@144Hz
	Thunderbolt 4/ USB 4	8K@60Hz	6K@60Hz	/
	USB-C DP Alt Mode	4K@60Hz	/	/
MacBook	M5 Max	8K@60Hz	8K@60Hz	4K@144Hz
	M5 Pro	8K@60Hz	6K@60Hz	4K@144Hz
	M5	8K@60Hz	6K@60Hz	/
	M4 Max	8K@60Hz	8K@60Hz	/
	M4 PRO	8K@60Hz	6K@60Hz	/
	M4	8K@60Hz	6K@60Hz	/
	M3 Max	8K@60Hz	6K@60Hz	/
	M2/M3 Pro	8K@60Hz	6K@60Hz	/
	M2 Max	8K@60Hz	6K@60Hz	/
	M1 Pro/Max	6K@60Hz	6K@60Hz	/
	M1/M2/M3 Standard	6K@60Hz	/	/

3.2 High-Refresh Rate Settings


Host Device	Host Port / Model	Single Display	Dual Display	Triple Display
Windows Laptop	Thunderbolt 5	4K@240Hz	4K@240Hz	4K@144Hz
	Thunderbolt 4/ USB 4	4K@240Hz	2K@120Hz	/
	USB-C DP Alt Mode	2K@120Hz	/	/
MacBook	M5 Max	4K@240Hz	4K@240Hz	4K@144Hz
	M5 Pro	4K@240Hz	4K@240Hz+4K@165Hz	4K@144Hz
	M5	4K@240Hz	4K@144Hz	/
	M4 Max	4K@240Hz	4K@240Hz	/
	M4 PRO	4K@240Hz	4K@144Hz	/
	M4	4K@240Hz	4K@120Hz	/
	M3 Max	4K@240Hz	4K@165Hz	/
	M2/M3 Pro	4K@240Hz	4K@120Hz	/
	M2 Max	4K@240Hz	4K@144Hz	/
	M1 Pro/Max	4K@144Hz	4K@120Hz	/
	M1/M2/M3 Standard	4K@144Hz	/	/

4. Using the Product

1. Connect the DC plug of the power adapter to the docking station's DC port, and plug the AC plug of the power adapter into a power outlet. The indicator on the docking station will then turn green, confirming power supply is active.
2. Connect your laptop to the Thunderbolt 5 upstream port on the docking station. The indicator will turn blue, confirming the docking station has connected to host devices.

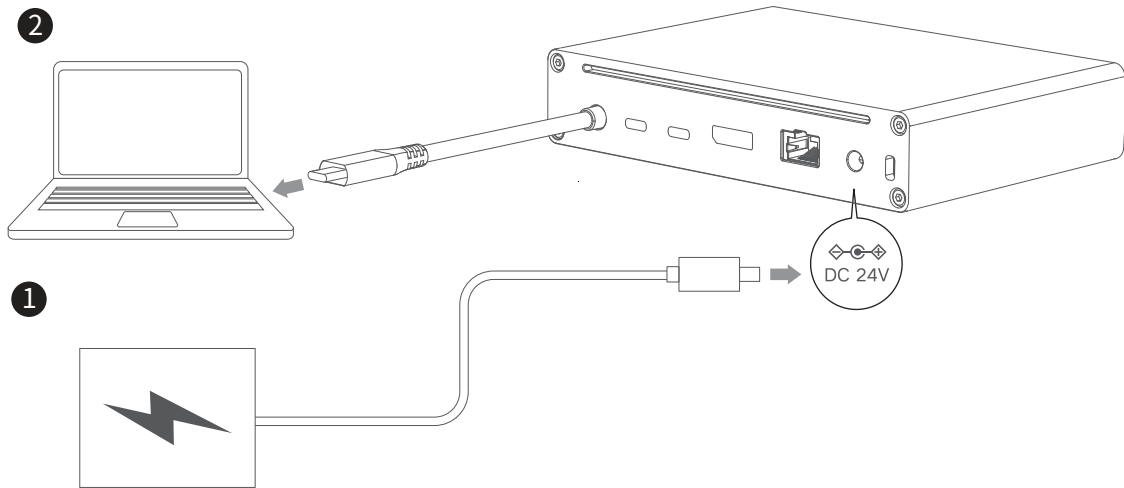

3. Connect other devices and enjoy.

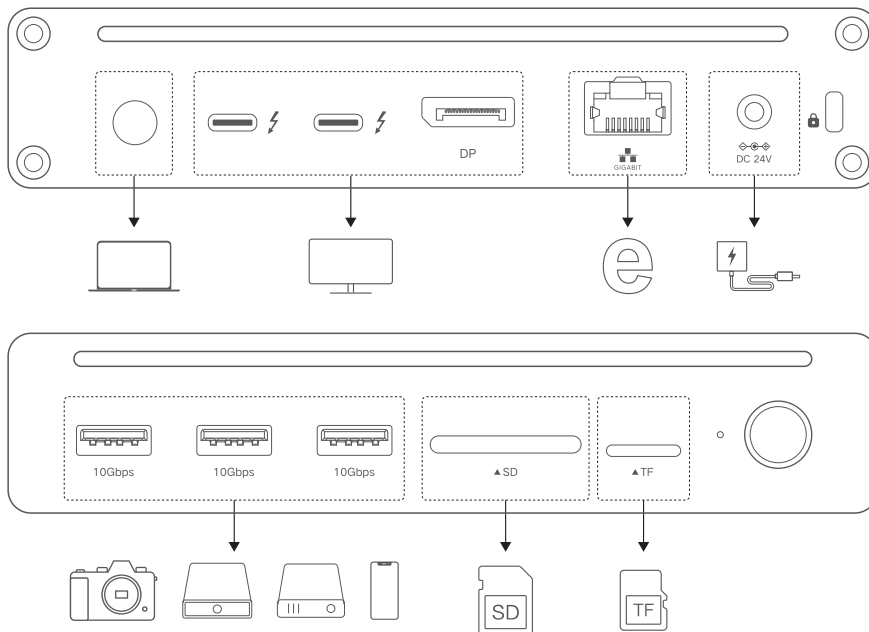

5. Specifications & Safety Warnings

5.1 Specifications

Working Temperature	32°F ~ 104°F(0°C ~ 40°C)
Storage Temperature	-4°F ~ 158°F(-20°C ~ 70°C)
Data Transfer Speed	120Gbps Max
Supported Systems	Windows 11, mac OS 15 and later

5.2 Safety Warnings

- Keep the Docking Station away from liquids and moisture. Exposure to liquids can result in damages, electric shock and fire hazard.
- Always unplug the device from the electrical outlet if there is a risk of lightning or if it will be unused for an extended period-of-time. Otherwise, there is an increased risk of electrical shock, short-circuiting, or fire.
- Protect your device from excessive exposure to dust during use or storage. Dust can build up inside the device, increasing the risk of electrical shock, short-circuiting, or fire.
- Please do not block or cover the heat sink on the device. It helps to keep the device cool during operation.
- Please do not attempt to repair or open the device yourself. Doing so can result in personal injury, damage the device, and will void the warranty. If you have any issues, please contact UGREEN Technical Support if necessary.
- For data safety, please do not directly disconnect the storage device from this product. Before disconnecting, please safely remove the external device from the computer.
- If not in use for prolonged periods, please carefully store the product to avoid dust and humidity.

6. Troubleshooting

6.1 Cannot Connect to the Laptop or Stops Working Intermittently

1. Software Version Compatibility

- a. Compatible with Windows 10 (23H2 or newer) and macOS 15.0 or later. Linux systems are not supported.
- b. Before use, it is recommended to update the following drivers for your laptop: system BIOS, graphics driver, Thunderbolt driver & firmware, and Ethernet driver.

Note:

Outdated BIOS or drivers may cause the system to fail to recognize the docking station or affect its performance. Visit each hardware manufacturer's support page to obtain the latest drivers.

2. Compatibility Issues

- a. Ensure your laptop is compatible with Thunderbolt 5, 4, or USB4. Windows systems with Thunderbolt 3 are not supported.
- b. The following tested incompatible products:
 - i. Lenovo Xiaoxin Pro16 IAH7 2022
 - ii. Lenovo X1 (i7-1185G7)
 - iii. Xiaomi 15PRO Laptop
 - iv. Huawei MateBook 14 2023
 - v. DELL XPS 15 Book (i5-9300H)
 - vi. Dell Latitude 7740
 - vii. HP Elitebook 840 G6 (Intel i5-8365U)
 - viii. Huawei MateBook X Pro 2024
 - ix. ASUS ZenBook Flips (i7-1165G7)

3. Cable Requirements

- a. Use the included Thunderbolt 5 cable with the docking station. Using uncertified or incompatible cables may cause product malfunctions.

4. Power Supply Issues

- a. Use the provided power adapter with the docking station. Non-original adapters are not recommended.
- b. Check that the power switch on the product is set to ON, and try pressing it multiple times.

5. Interface Troubleshooting

- a. Try connecting the docking station to another Thunderbolt/USB4 USB-C port (if available) on your Laptop. If the other port works, the original host port may have physical damage or internal failure.
- If all steps above fail: Contact the docking station manufacturer's technical support and provide your computer model, OS version, and troubleshooting steps taken.

6.2 Cannot Connect to a Monitor or Dual/Triple Monitors

1. Please follow 6.1 What should I do if the dock cannot connect to my laptop or stops working intermittently? steps to make sure the dock is working.
2. Please refer to 2.3 summary in this manual to check the video output capability of the laptop and confirm that the device supports dual/triple-screen output.
3. Try a different display cable or monitor, ensuring the monitor's USB-C port supports video input if using a Thunderbolt port for screen mirroring, and verify the monitor is on the correct input.
4. Disconnect the dock from your computer and all connected devices for at least 5 minutes, then reconnect after rebooting your laptop to test if the issue is fixed.

6.3 USB-A port Stops Working or Functions Intermittently

1. Unplug the docking station from your laptop and all attached devices for a minimum of 5 minutes. After restarting your laptop, reconnect all components to determine if the issue has been resolved.
2. Verify whether peripheral devices operate correctly when directly connected to the laptop without the docking station.
3. Attempt using a different functional USB A device to assess whether the port itself is defective.
4. If possible, test the dock with an alternative laptop to ascertain whether the problem persists.

6.4 SD Port or Micro SD Port is not Working

1. Unplug the docking station from your laptop and all attached devices for a minimum of 5 minutes. After restarting your laptop, reconnect all components to determine if the issue has been resolved.
2. Make sure the card is fully inserted into the port.
3. Try using a different SD card.
4. If possible, test the dock with an alternative laptop to ascertain whether the problem persists.

6.5 What to Do If the Docking Station's Wired Ethernet Port Fails to Connect to the Network?

Check Hardware Connection and Physical Status

• Verify Reliability of Ethernet Cable and Port

- a. Replace with a CAT5e/CAT6 Ethernet cable for testing to rule out cable damage.
- b. Clean the gold contacts of the Ethernet port and adjust loose port springs. Connect the cable directly to the computer's built-in Ethernet port to identify whether the issue lies with the docking station or the network environment.

• Analyze Ethernet Port Indicator Status

- a. No light: Check the docking station's power supply (external power or PD power required) and confirm power supply to the router's port.
- b. Abnormal blinking: Verify the Ethernet cable specification (CAT5e or higher required) and restart the router.

Optimize Drivers and System Settings

• Update and Repair Drivers

- a. Windows: In Device Manager, uninstall the faulty Ethernet port driver, then restart the computer to allow automatic re-installation. Alternatively, download the dedicated driver from the official website for manual installation.
- b. macOS: Add an Ethernet interface, confirm the docking station is detected via System Report, and update the system or replace the device if necessary.

• Reset Network Configuration

- a. Ensure IP address is obtained automatically (DHCP) and delete any static IP settings.
- b. Enter "netsh winsock" reset in Command Prompt to reset the network adapter, then restart the computer for the changes to take effect.

Troubleshoot Power Supply and Compatibility

• Test Power Supply Capacity

- a. Disconnect high-power-consuming devices and connect only the Ethernet cable. Check the USB port power output; if insufficient, replace with a PD-powered docking station or use a Thunderbolt port.

• Resolve Compatibility Issues

- a. For USB 2.0 ports, replace with a docking station that supports USB 3.0 or higher. Confirm the docking station is compatible with the current operating system. Avoid electromagnetic interference from 2.4GHz devices by switching Wi-Fi to the 5GHz band.

7. FAQ

7.1 Compatibility Related

Q1: Does this dock work with Thunderbolt 4 or 3 laptops? How do I check compatibility?

A: This product is not compatible with Windows laptops equipped with Thunderbolt 3 ports but is compatible with Thunderbolt 5, 4, or USB4 laptops. Please note, some USB4 laptops may not support dual monitors with our docking station. For MacBooks, please make sure that the macOS is 15 or later.

Q2: Is it normal for a pop up screen to appear on my MacBook asking to allow the docking station(accessory) to connect?

A: This is a new security feature in MacBook laptops containing Apple silicon and macOS 13 or later. When using the Thunderbolt connection for the first time with your MacBook, please select "Allow" so that your MacBook can recognize the docking station and enable its charging, data transmission, and video streaming features.

Q3: Can I connect an external GPU to this docking station on my Silicon chip MacBook?

A: NO. Apple Silicon-based Macs (including M1, M2, M3, and M4 models) lack support for external graphics processing units (eGPUs). This limitation is enforced at the system level by Apple: macOS will neither recognize nor utilize an eGPU, even if connected via an external docking station.

7.2 Display Related

Q4: Can I use a USB-C to HDMI or DP adapter/cable on the Thunderbolt downstream ports to connect a second HDMI or DP monitor?

A: Sure. When using USB-C to DP or USB-C to HDMI adapter/cable, ensure its maximum supported resolution and refresh rates are \geq the target output resolution and refresh rate. UGREEN adapter/cable is recommended.

Q5: Why isn't the resolution of my monitor reaching the desired specifications after connecting to the dock?

A: Key factors affecting performance include:

- Monitor DSC Enablement
 - Monitors must have Display Stream Compression (DSC) activated to support high resolutions (e.g., 8K).
 - In multi-display setups, disabled DSC on any monitor may overload bandwidth, preventing other displays from reaching target resolutions.
- Host System Requirements
 - Ensure compatibility with Thunderbolt 5/4 or USB4 for adequate bandwidth.
 - Enable DSC on both the monitor and host (consult manufacturer guides).
 - Verify Thunderbolt/USB4 support, especially for multi-display use, to avoid resolution issues.

Q6: When activating HDR, why does my laptop screen shutter or refuse to turn on after connecting a Thunderbolt/DP cord and selecting 8K/30Hz or 4K/60Hz?

A: Since memory on a laptop graphics card is limited, lag may exist in the event high graphic quality takes up too much memory. If you meet such an issue, we suggest you turn off the HDR to release occupied memory.

Q7: The monitor displays correctly after a black screen when plugging and unplugging the dock, is it normal?

A: Yes. The monitor will display images after the EDID reading. This usually takes about 10s.

Q8: How to deal with a black screen and display flickering when connecting to an external monitor?

A: Please follow the steps below:

1. Please unplug and plug the Thunderbolt ports, and ensure there is an interval of more than 3 seconds.
2. Please try to lower the resolution and refresh rate.
3. Try another Thunderbolt cable.
4. Restart the laptop.

7.3 Charging Related

Q9: Why does my laptop display a "Low Power Charging" notification even though it is advertised to support 140W charging?

A: Here are some possible reasons.

1. Cable Compatibility: Use a USB-C E-Marker cable (rated for 5A current). Standard USB-C cables ($\leq 3A$) cannot support 140W.
2. Check Laptop PD Version: Verify your laptop's USB-C port supports charging and that it is compatible with the Power Delivery 3.1 (PD 3.1) protocol. Some laptops use proprietary charging protocols, which are fully compatible only with their original adapters, and thus, may show a low-power notification when using third-party docks.
3. Thermal Throttling: Overheating in the dock or laptop can reduce charging power.
4. Firmware/Software Mismatches: Outdated firmware or power management settings disrupt PD negotiation:

a. Windows:

i. Update Chipset Drivers: Install the latest Intel/AMD chipset drivers (via Manufacturer Support > Drivers & Software).

ii. Power Plan Settings: Go to Control Panel > Power Options > Select "High Performance" (not "Power Saver").

b. macOS:

i. SMC Reset: For Intel Macs, shut down > Press Shift+Control+Option+Power button > Wait 10 seconds.

ii. System Firmware Update: Ensure macOS is updated to the latest version (System Settings > Software Update).

7.4 Safety Related

Q10: Is it normal for my docking station to get warm or hot?

A: As is the case with most electronic devices, the increased warmth is expected and does not represent a safety issue under normal operation, particularly if in use for extended periods of time. To accommodate the increase in temperature, the docking station is equipped with a built-in silicone pad to keep the temperature range within 32°F ~ 104°F (0°C ~ 40°C) while in an environment temperature of around 25°C /77°F.

8. Technical Support

If you run into any issues while using the dock, please contact UGREEN Technical Support.

Please contact us at any time by following these steps:

- a) Go to "Your Orders".
- b) Next to the relevant order, click "Problem with order".
- c) Click "Contact Seller" and send your message to us.