

# Installation Instructions: On/Off Microwave Sensor: 10282V2

Read these instructions before installation and retain for future reference

This equipment should be installed by a competent electrician



## Important Information

We recommend that luminaires are installed by a qualified electrician ensuring the installation complies with current IEE wiring regulations BS7671:2018 & local building control..


- BELL will not accept responsibility for any claims arising from a poor installation.
- Do not cover with any insulation.
- Internal use only.



This product may contain substances that can be hazardous to the environment if not disposed of properly. Electrical and electronic equipment should never be disposed of with general household waste but must be separated for its correct treatment and recovery.

Where possible recycle your packaging.

## Wiring

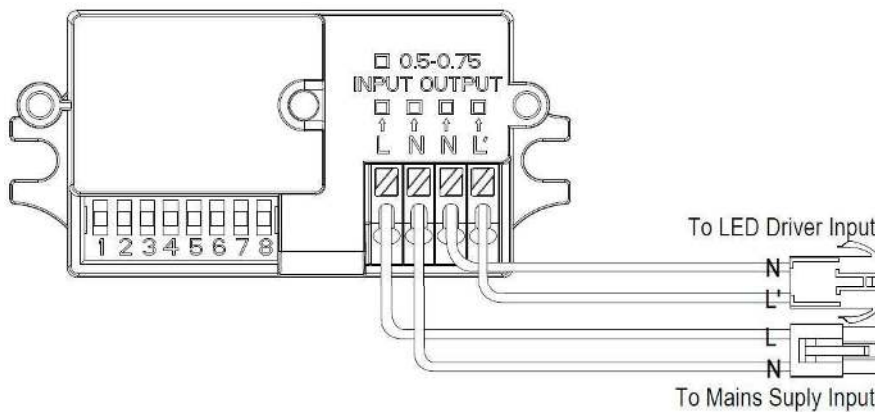

## DIP Switch Settings

Detection Area				Hold Time				Ambient Light Level					
	1	2			3	4	5		6	7	8		
I	ON	ON	100%	I	ON	ON	ON	5S	I	ON	ON	ON	2Lux
II	ON	-	75%	II	ON	ON	-	30S	II	ON	ON	-	10Lux
III	-	ON	50%	III	ON	-	ON	1min	III	-	ON	-	25Lux
IV	-	-	25%	IV	ON	-	-	3min	IV	ON	-	-	50Lux
				V	-	ON	ON	5min	V	-	-	-	Disable*
				VI	-	ON	-	10min					
				VII	-	-	ON	20min					
				VIII	-	-	-	30min					

Setting the sensor to disable (default) will revert the luminaire to on/off operation regardless of low ambient light levels.

Daylight measurements are values that are measured on a bright day without shadows and using diffuse ambient light reflection

Factory Settings: Detection Area: 75%, Hold Time: 30Seconds, Daylight Sensor: Disabled

## Override Function

Light will remain on after quickly turning on and off the light five times in two seconds.

The sensing function will be restored when the power is switched on again.