

# MIC® Tight-Buffered Cable, Plenum 24 F, Single-mode (OS2)



**Part Number:**  
**024E88-33131-29**

Corning MIC® plenum cables are designed for use in plenum, riser and general purpose environments for intrabuilding backbone and horizontal installations. These multifiber cables use 900 µm buffered fibers to allow easy, consistent stripping and to facilitate termination. The fibers are surrounded by dielectric strength members and protected by a flame-retardant outer jacket. The all-dielectric cable construction requires no grounding or bonding. MIC plenum cables are ideal for routing inside buildings, within plenum areas and riser shafts, to the telecommunications rooms and workstations. The MIC plenum cables meet the application requirements of the National Electrical Code® (NEC®) Article 770 and are OFNP and FT-6 listed.

## Features and Benefits

### 900 µm buffered fibers



Easy, consistent stripping

### All-dielectric construction

Requires no grounding or bonding

### Flame-retardant jacket

Rugged and durable

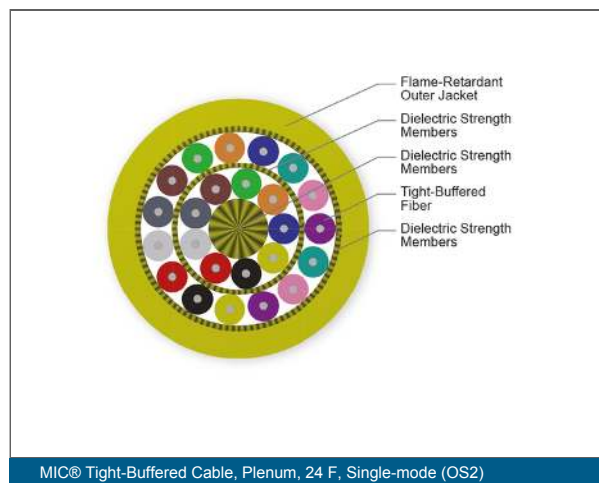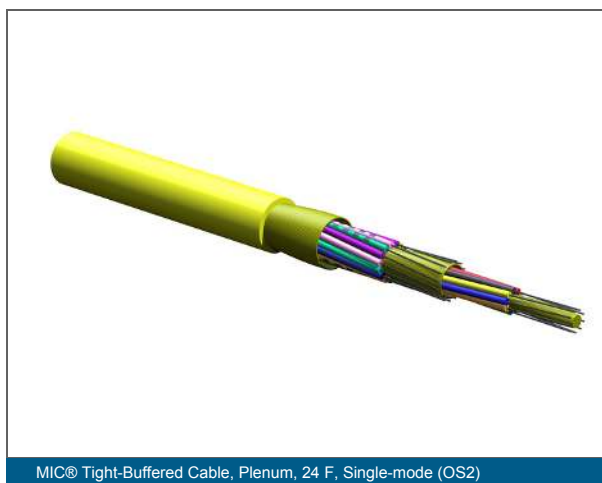

# MIC® Tight-Buffered Cable, Plenum 24 F, Single-mode (OS2)



## Specifications

General Specifications	
Environment	Indoor
Cable Type	Tight-Buffered
Product Type	Distribution
Fiber Category	Single-mode (OS2)
Flame Rating	Plenum (OFNP)
Application	General Purpose Horizontal, Plenum, Vertical Riser
Fiber Count	24

Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	National Electrical Code® (NEC®) OFNP, NFPA 262, CSA FT-6, ICEA S-83-596
Flame Test Method	NFPA 262 and CSA FT-6 (for plenum, riser and general building applications), ICEA S-83-596

Environmental Conditions	
Temperature Range, Installation	0 °C to 60 °C (32 °F to 140 °F )
Temperature Range, Operation	0 °C to 70 °C (32 °F to 158 °F )
Temperature Range, Storage	-40 °C to 70 °C (-40 °F to 158 °F )

Cable Design	
Central Element	Yarn
Fiber Count	24
Outer Jacket Color	Yellow
Outer Jacket Material	Flame-retardant
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members

# MIC® Tight-Buffered Cable, Plenum 24 F, Single-mode (OS2)



Cable Design	
Tensile Strength Elements and/or Armoring - Layer 2	Dielectric strength members
Tight Buffer Color, Layer 2	Violet, Rose, Aqua, Blue*, Orange*, Green*, Brown*, Slate*, White *, Red*, Black*, Yellow*, Violet*, Rose*, Aqua*
Flame Rating	Plenum (OFNP)

Mechanical Specifications	
Max. Tensile Strength, Long-Term, ≤12F	132 N (29.67 lbf)
Max. Tensile Strength, Long-Term, >12F	200 N (44.96 lbf)
Max. Tensile Strength, Short-Term, ≤12F	440 N (98.92 lbf)
Max. Tensile Strength, Short-Term, >12F	660 N (148.37 lbf)
Min. Bend Radius Installation	117 mm (4.61 in)
Min. Bend Radius Operation	77 mm (3.03 in)
Nominal Outer Diameter	7.7 mm (0.3 in )

Optical Characteristics	
Fiber Code	E
Fiber Name	SMF-28e+® fiber
Fiber Type	Single-mode
Performance Option Code	31
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.4 dB/km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Category	G.652.D

Dimensions	
Cable Weight	583 kg/km (391.76 lb/1000 ft)

# MIC® Tight-Buffered Cable, Plenum 24 F, Single-mode (OS2)

The CORNING logo is displayed in white, uppercase letters within a solid blue square.

Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2024 Corning Optical Communications. All rights reserved.