

MIC[®] Unitized Tight-Buffered Cables, Riser, 36-144 Fibers

CORNING

Features and Benefits

900 μm buffered fibers
Easy, consistent stripping

6-, 12- or 24-fiber jacketed subunits
Quick and easy identification

All-dielectric cable construction
Requires no grounding or bonding

Flame-retardant jacket
Rugged and durable


Standards

Listings	National Electrical Code [®] (NEC [®]) OFNR, FT-4
Design and Test Criteria	UL-1666 and CSA FT-4 (for riser and general building applications); ICEA S-83-596


Corning MIC[®] unitized riser cables are designed for use in riser and general purpose environments for intrabuilding backbone installations. These multifiber cables use individually jacketed 900 μm buffered fibers enabling easy, consistent stripping and facilitating termination. The 6-, 12-, or 24-fiber subunits allow quick and easy identification and are surrounded by dielectric strength members and protected by a flame-retardant outer jacket.

The all-dielectric cable construction requires no grounding or bonding, making these cables ideal for routing inside buildings including riser shafts, to the telecommunications rooms and workstations. The MIC Unitized Riser Cables meet the application requirements of the National Electrical Code[®] (NEC[®]) Article 770 and the ICEA S-83-596 test criteria. They are OFNR and FT-4 listed.

This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables. The standard jacket color will be determined by the dominant fiber type in the cable and will use the standard part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.

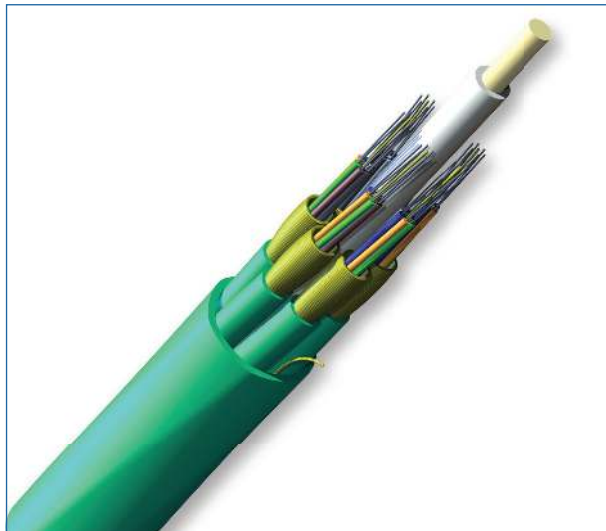


MIC Unitized Riser Cables, 36 Fibers

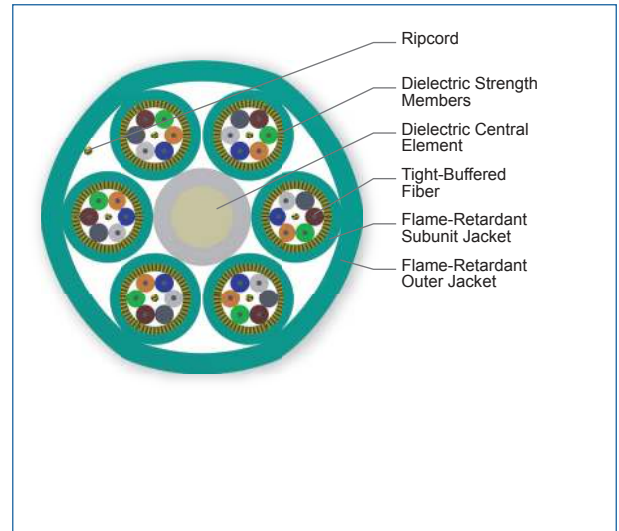


MIC Unitized Riser Cables, 36 Fibers

MIC[®] Unitized Tight-Buffered Cables, Riser, 36-144 Fibers

CORNING

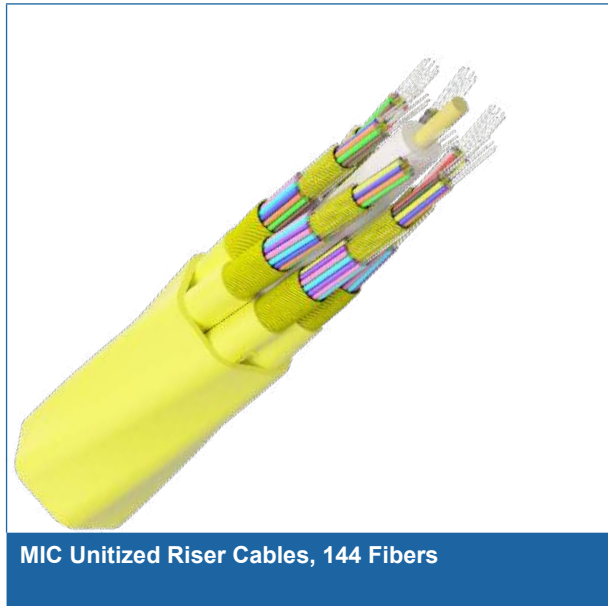

MIC Unitized Riser Cables, 144 Fibers

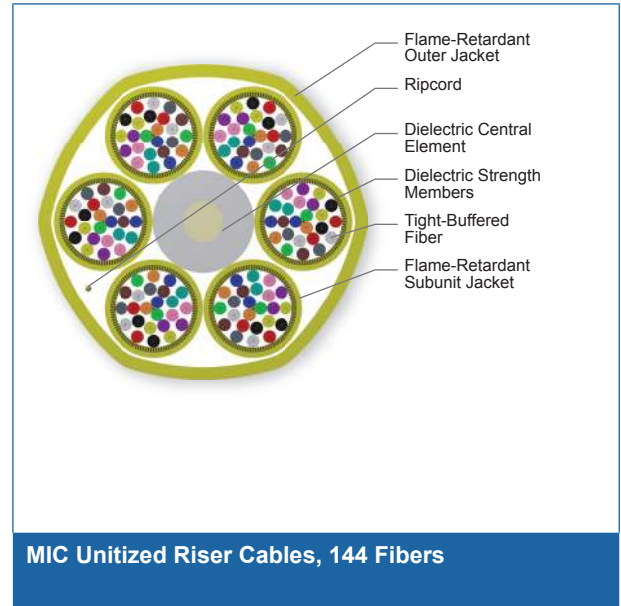

MIC Unitized Riser Cables, 144 Fibers

Specifications

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-10 °C to 60 °C (14 °F to 140 °F)
Operation	-20 °C to 70 °C (-4 °F to 158 °F)

* Note: Corning recommends storing cable in a proper temperature environment prior to installation to allow the cable temperature to meet installation temperature range specifications for best installation results.

Mechanical Characteristics Cable	
Max. Tensile Strength, Long-Term	89 lbf (400 N)
Max. Tensile Strength, Short-Term	1320 N (300 lbf)

Fiber Count	Subunit Diameter	Nominal Outer Diameter	Min. Bend Radius Installation	Min. Bend Radius Operation	Weight
36	4.40 mm (0.17 in)	14.8 mm (0.58 in)	222 mm (8.7 in)	148 mm (5.8 in)	181.3 kg/km (121.8 lb/1000 ft)
48	4.40 mm (0.17 in)	17.8 mm (0.69 in)	267 mm (10.5 in)	178 mm (7.0 in)	258.4 kg/km (173.6 lb/1000 ft)
60	5.55 mm (0.22 in)	17.9 mm (0.7 in)	268.5 mm (10.6 in)	179 mm (7.0 in)	233.5 kg/km (156.9 lb/1000 ft)

CORNING

MIC[®] Unitized Tight-Buffered Cables, Riser, 36-144 Fibers

CORNING

Fiber Count	Subunit Diameter	Nominal Outer Diameter	Min. Bend Radius Installation	Min. Bend Radius Operation	Weight
72	5.55 mm (0.22 in)	18.6 mm (0.73 in)	279.0 mm (11.0 in)	186 mm (7.3 in)	276.0 kg/km (190.0 lb/1000 ft)
96	6.80 mm (0.27 in)	18.5 mm (0.73 in)	277.5 mm (10.93 in)	185 mm (7.28 in)	276.5 kg/km (185.8 lb/1000 ft)
144	6.80 mm (0.27 in)	23.5 mm (0.93 in)	352.5 mm (13.88 in)	235 mm (9.25 in)	433.6 kg/km (291.37 lb/1000 ft)

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Transmission Performance

Multimode					
Fiber Core Diameter (μm)	62.5	50	50	50	50
Fiber Category	OM1	OM2	OM3	OM4	OM4 Extended Distance
Fiber Code	K	T	T	T	T
Performance Option Code	30	31	80	90	91
Wavelengths (nm)	850/1300	850/1300	850/1300	850/1300	850/1300
Maximum Attenuation (dB/km)	3.4/1.0	2.8/1.0	2.8/1.0	2.8/1.0	2.8/1.0
Serial 1 Gigabit Ethernet (m)	300/550	750/600	1000/600	1000/600	1100/600
Serial 10 Gigabit Ethernet (m)	33/-	150/-	300/-	550/-	600/-
Min. Overfilled Launch (OFL) Bandwidth (MHz*km)	200/500	700/500	1500/500	3500/500	3500/500
Minimum Effective Modal Bandwidth (EMB) (MHz*km)	220/-	950/-	2000/-	4700/-	5350/-

* 50 μm multimode fiber (OM3/OM4/OM4+) meets 0.75 ns optical skew when used in all Corning Plug and Play™/EDGE™ systems solutions.

* 50 μm multimode fiber (OM4) T90 10 Gigabit Ethernet distance assumes 1.0 dB maximum total connector/splice loss.

* 50 μm multimode fiber (OM4) T91 10 Gigabit Ethernet Distance assumes 0.7 dB maximum total connector/splice loss.

MIC[®] Unitized Tight-Buffered Cables, Riser, 36-144 Fibers

CORNING


Single-mode		
Fiber Name	SMF-28e [®] fiber	SMF-28 [®] Ultra fiber
Fiber Category	G.652.D	G.652.D/G.657.A1
Fiber Code	E	Z
Performance Option Code	31	31
Wavelengths (nm)	1310/1383/1550	1310/1383/1550
Maximum Attenuation (dB/km)	0.4/0.4/0.4	0.4/0.4/0.4

* Improved attenuation and bandwidth options available.

* Bend-insensitive single-mode fibers available on request.

* Contact a Corning Customer Care Representative for additional information.

Ordering Information | Note: Contact Customer Care at 1-800-743-2675 for other options.

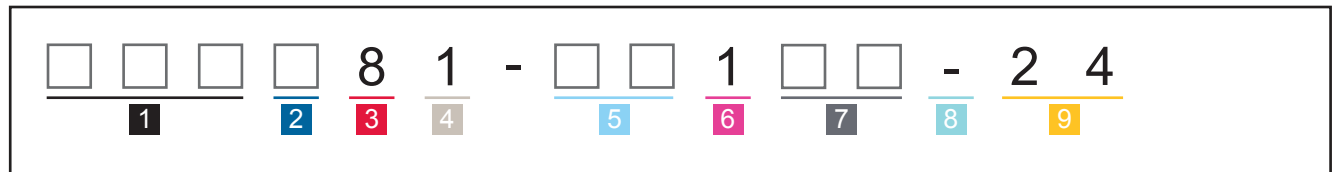

1 Select fiber count.

Standard offerings:
036 060 096
048 072 144

2 Select fiber code.

K = 62.5 μm multimode (OM1)
T = 50 μm multimode,
(OM2/OM3/OM4/OM4+)
E = Single-mode (OS2)
SMF-28e[®]
Z = Single-mode (OS2)
SMF-28[®] Ultra fiber

3 Defines cable type.

8 = MIC[®]/MIC Unitized
cable family

4 Defines outer jacket.

1 = Riser

5 Select number of fibers
per subunit.

61 = 6 fibers per subunit
(036-048 fibers)
T3 = 12 fibers per subunit
(060-072 fibers)
Y3 = 24 fibers per subunit
(096-144 fibers)

6 Defines tensile strength.

1 = See Specifications.

7 Select performance
option code.

30 = 62.5 μm multimode (OM1)
31 = 50 μm multimode (OM2)
80 = 50 μm multimode (OM3)
90 = 50 μm multimode (OM4)
91 = 50 μm multimode (OM4+)
31 = Single-mode, OS2
(Max. attenuation .65 / .65 / 0.5 dB/km)

8 Defines cable type.

- = MIC[®]/MIC Unitized Cable

9 Defines special
requirements.

24 = Standard for MIC Unitized
riser cables

MIC[®] Unitized Tight-Buffered Cables, Riser, 36-144 Fibers

CORNING

Notes



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2020 Corning Optical Communications. All rights reserved.

CORNING