


D-Link Quick Installation Guide


Installation Instructions 10/100BASE-TX / 100BASE-FX Fiber Interface Converters DFE-855 SERIES



The New Fiber Converter Series DFE-855 series provides you with SC connectors for your fiber optic cable and RJ-45 ports (straight through and crossover) for your 10/100Base-TX cable connection. The Fast Fiber Converters give you the freedom to extend your 10/100Mbps cabling distance by allowing connectivity up to 120 kilometers. Two LED indicators signal the UTP link status and the Fiber link status

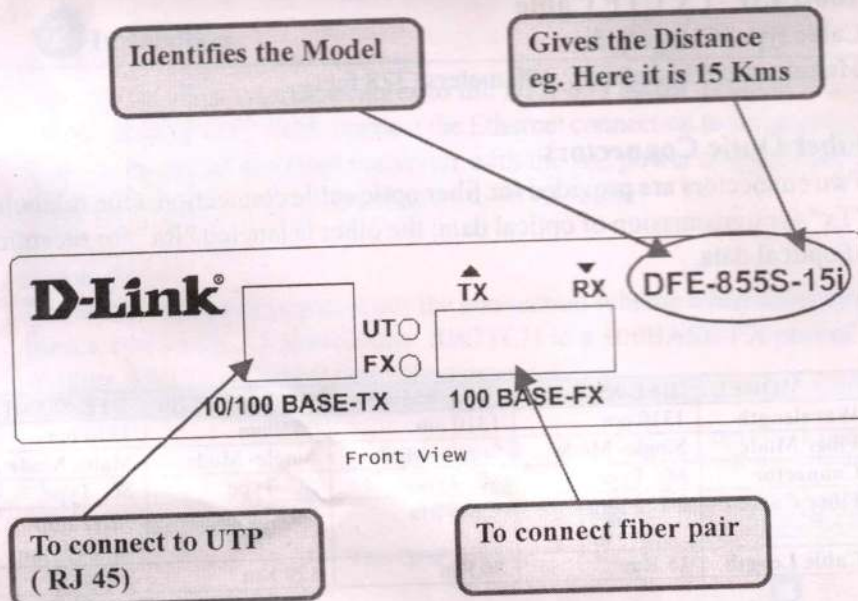

The following example illustrates the connection scheme when connecting from a 100BASE-TX port of one HUB to a 100BASE-TX Network Interface Card (NIC) in a computer through the fiber converter.

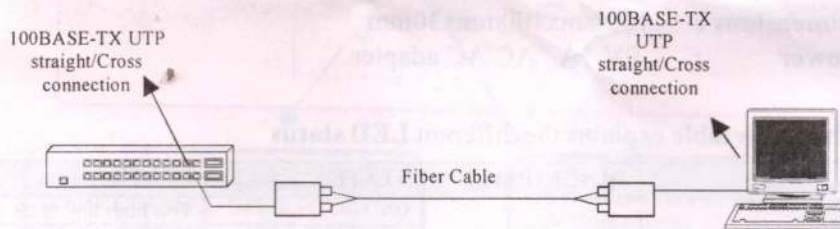

TRADEMARKS

Ethernet is a registered trademark of Xerox Corp.

ST[®] is a registered trademark of AT&T.

WARNING:

The information contained in this document is subject to change without prior notice.

This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instruction manual may cause harmful interference in which case the user will be required to correct the interference at his own expense. NOTICE: (1) The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

WARNING:

This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

D-LINK INDIA LIMITED

L5, VERNA ELECTRONIC CITY

VERNA, GOA. INDIA - 403722

PH: +91-832-2885400/404/426 FAX: +91-832-2783395


D-Link[®]

DOC: Q/TD/RAD/QDFE855SM/ 001

VER:0

DATE: 18-3-2005

Back View

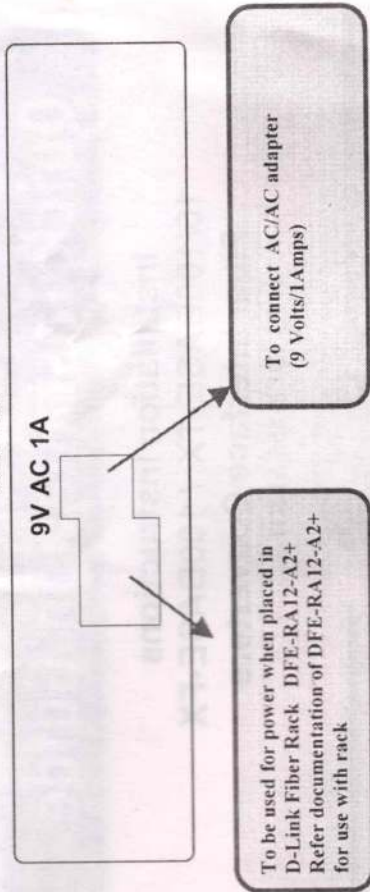

1 Specifications

Standard

IEEE802.3u 100BASE-TX, 100BASE-FX (Fast Ethernet, 100Mbps)
Supports Full Duplex Ethernet mode (200Mbps)

100BASE-TX UTP Cable

Cable type: Category 5e
Maximum cable distance: 100 meters (328 feet)

Fiber Optic Connectors

Two connectors are provided for fiber optic cable connection. One is labeled "Tx" for transmission of optical data; the other is labeled "Rx" for reception of optical data.

MODEL	DFE-855S-15i	DFE-855S-50i	DFE-855S-120i	DFE-855Mi
Wavelength	1310 nm	1310 nm	1550nm	1310 nm
Fiber Mode	Single- Mode	Single- Mode	Single- Mode	Multi- Mode
Connector	SC Type	SC Type	SC Type	SC Type
Fiber Cable	9/125 μm	9/125 μm	9/125 μm	50/125μm 62.5/125μm
Cable Length	15 Km	50 Km	120 Km	2 Km

NOTE: The Maximum possible fiber Cable length is 120 Kms .

Environment:

Temperature : 00 – 50°C
Humidity : 10-90% non condensing
Dimensions : 130mmx100mmx30mm
Power : 9V 1A AC/AC adapter

The below table explains the different LED status

LED's	DESCRIPTION	STATE	STATUS
FX	Fiber Link	ON	The fiber link is ok.
		OFF	No link or the link is faulty.
		BLINKING	Receiving data on fiber
UT	Ethernet Link	ON	The UTP link is ok.
		OFF	No link or the link is faulty.
		BLINKING	Receiving data on Ethernet.

Use the above LED indications to identify the area of problem

2 Installation

Connect the fiber interface cables to the DFE-855 series product Using a straight or cross UTP cable connect the Ethernet connection to the appropriate RJ-45 jack. Install the fiber converter with the AC power adapter provided (9V AC/AC) and connect the adapter to an AC outlet.

Connections

The following example illustrates the connection scheme when connecting from a 100BASE-TX port of one SWITCH to a 100BASE-FX port of another SWITCH through the fiber converter.

