


STORMER LITE

RGB LED 1000W COLOURING STROBE

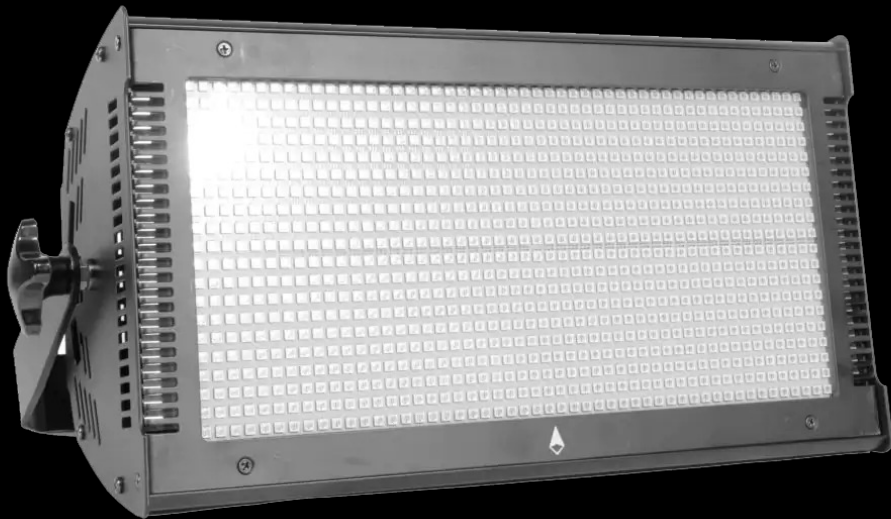

USER MANUAL | MANUAL DE USUARIO

PLEASE READ THE INSTRUCTIONS CAREFULLY BEFORE USE
POR FAVOR LEA LAS INSTRUCCIONES ANTES DE USAR



1. MENU

6 Channel	16 Channel	function	Value	function
1	1	dimmer	0 -4	close
			5 -255	from dark to bright
2	2	strobe	0 -4	close
			5 -54	random Strobe
			55 -104	fade in
			105-154	fade out
			155-204	pulse Strobe
			205-255	Strobe
3	3	Strobe Speed	0 -255	Speed from slow to fast
4	4	R dimmer	0 -255	red color from dark to bright
5	5	G dimmer	0 -255	green color from dark to bright
6	6	B dimmer	0 -255	blue color from dark to bright
	7	Color mode	0 -4	no effect
			5 -14	R
			15 -24	G
			25 -34	B
			35 -44	Yellow
			45 -54	Cyan
			55 -64	Magenta
			65 -74	W
			75 -199	Color jumps slowly to fast
			200-255	Random color slow to fast

MENU

	8	Color gradient	0 -7	no effect
			8 -39	Red to Yellow
			40 -71	Yellow to Green
			72 -103	Green to Cyan
			104-135	Cyan to Blue
			136-167	Blue to Magenta
			168-199	Magenta to Red
			200-255	Color gradient slow to fast
	9	Built-in effect	0 -4	no effect
			5 -255	Water flow
	10	Effect speed	0 -255	Slow to fast
	11	Effect gradient	0 -255	
	12	effect R	0 -255	Effect Red dimming from dark to bright
	13	effect G	0 -255	Effect Green dimming from dark to bright
	14	effect B	0 -255	Effect blue dimming from dark to bright
	15	effect dimmer	0 -255	Effect dimming from dark to bright
	16	background dimmer	0 -255	background dimmer dimming from dark to bright

ADRESS

1	Address		001-512
2	Run Mod		Slave
			Auto
			Sond
3	ChanMod		6CH
			16CH
4	Display	Bckligh	ON
			1Min
			2Min
			3Min
		MenuBak	Off
			1Min
			2Min
			3Min
		DmxFlsh	Off
			On
5	Tool	Balance	WhiteSW
			Red (50—255)
			Green(50—255)
			Blue (50—255)
		DmxClea	Off
			On
		DefCfig	Off
			On

ADDRESS

6	Manual	Dimmer	0-255
		Strobe	
		StrobSP	
		Red	
		Green	
		Blue	
		ColorM	
		ColorF	
		Case	
		CaseSP	
		CaseFad	
		CaseR	
		CaseG	
		CaseB	
		CaseDim	
BackDim			
7	Info	RunTime	0000-9999
		DisVers	Vx.xx
		Temp	0-125
8	Rest		No
			Yes

TECHNICAL PARAMETERS

Technical Parameters

Product name: RGB LED 1000W Colouring
Strobe

Voltage: AC110V~240V 50-60Hz

Power: 1000W

Source: 3 in1 high brightness LED5054 SMD

Lamp quantity: 1000 PCS

Lamp power: 1.0W/PCS

effect: Colorful Strobe effect and Uniform RGB

color mixing system

rainbow effect

Channels: 16CH /6CH / Mode

Zones: 5

Control mode: DMX / Sound /Auto

Strobe Speed: 0~20/S

Dimmer: 0-100% linear electroic dimming

IP rated: IP20

Size: 54*32*20.5CM

Weight: 9KG

