


## 150W UFO HIGH BAY

### Installation Manual

## EASY SET-UP INSTRUCTIONS

Select from 3 installation methods below (Hook Mount with Lifting Ring, Ceiling Mount, ½ NPT Mount with/without bracket):

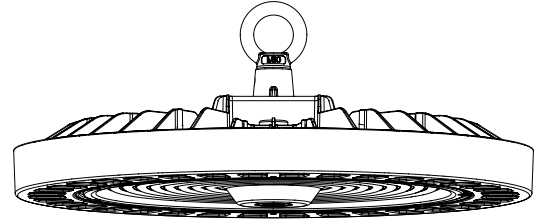

## EASY INSTALLATION

Hook Mount with Lifting Ring

	<ol style="list-style-type: none"> <li>1. Turn off circuit breaker/switch before installing.</li> <li>2. Drill a pilot hole.</li> <li>3. Securely install hook or adequate support in ceiling. <ul style="list-style-type: none"> <li>• If using a chain, cut to correct size to suspend fixture (chain and ceiling hook not included).</li> </ul> </li> </ol>		<ol style="list-style-type: none"> <li>4. Thread provided lifting ring into fixture.</li> <li>5. Screw-in set screw and tighten firmly.</li> </ol>
	<ol style="list-style-type: none"> <li>6. Hang fixture onto ceiling hook or chain.</li> <li>7. Secure light with included safety cable to prevent it from falling. <ul style="list-style-type: none"> <li>• Loop end secures on hanging hook. Clip end secures to precut hole between fins on fixture.</li> </ul> </li> </ol>		<ol style="list-style-type: none"> <li>8. Connect supply wires to UFO High Bay wires with included wire nuts. <ul style="list-style-type: none"> <li>• Black to Black (Live)</li> <li>• White to White (Neutral)</li> <li>• Green to Green (Ground)</li> </ul> <p><b>Optional:</b> To utilize dimming feature, connect compatible device (not included) to dimming signal wires. Cap wires if not adding dimmer device.</p> </li> <li>9. Turn on circuit breaker and test light.</li> </ol>


## EASY INSTALLATION

½ NPT Pipe Mount


	<ol style="list-style-type: none"> <li>1. Turn off circuit breaker/switch before installing.</li> <li>2. Unscrew nuts on ½ NPT.</li> <li>3. Screw mounting bracket (not included) onto fixture.</li> </ol>		<ol style="list-style-type: none"> <li>4. Insert ½ NPT stem into corresponding bracket holes.</li> <li>5. After connecting NPT and bracket, either: <ol style="list-style-type: none"> <li>a. Re-screw and tighten nuts (from ½ NPT) to secure.</li> </ol> </li> </ol> <p>OR</p> <ol style="list-style-type: none"> <li>b. Screw pipe into drive hole of light fixture.</li> </ol>
	<ol style="list-style-type: none"> <li>6. Connect UFO High Bay and supply wires using included wire nuts. <ul style="list-style-type: none"> <li>• Black to Black (Live)</li> <li>• White to White (Neutral)</li> <li>• Green to Green/ Bare Copper (Ground)</li> </ul> <p><b>Optional:</b> To utilize dimming feature, connect compatible device (not included) to dimming signal wires. Cap wires if not adding dimmer device.</p> </li> </ol>		<ol style="list-style-type: none"> <li>7. Modify fixture position by adjusting bracket screws.</li> <li>8. Turn on circuit breaker and test light.</li> </ol>

## EASY INSTALLATION


Ceiling Mount




1. Turn off circuit breaker/switch before installing.
2. Use marker to label location of fixture placement.
3. Drill holes into ceiling.




4. Hammer expansion anchors into prepared holes.



5. Align bracket and fixture holes with expansion anchors.




6. When holes are aligned, push fixture up.
  - Slide to adjust.
7. Tighten fixture nuts.



8. Connect supplywires to UFO High Bay wires with wire nuts.
  - Black to Black (Live)
  - White to White (Neutral)
  - Green to Green (Ground)

**Optional:** To utilize dimming feature, connect compatible device (not included) to dimming signal wires. Cap wires if not adding dimmer device.



9. Modify fixture position by adjusting bracket screws.
10. Turn on circuit breaker and test light.

## SPECIFICATIONS

Voltage	120-277V
Wattage	150W
Moisture Rating	IP65
Housing Material	Aluminium Alloy
Weight	3.74
Warranty	7 Years

## WARNING

**To reduce the risk of fire, electric shock, or physical injury:**

- This product should be installed in accordance with regional and local laws or regulations by a person familiar with the construction and operation of the product and the hazards involved.
- Check for shipping damage prior to installation. If the product is damaged, do not use it.
- Turn off the switch and circuit breaker before installing this light fixture.
- Proper grounding is required to ensure safety.
- Do not install directly over a heat source (stove, etc.).
- This fixture should not be installed on a radiant heating ceiling or on the surface of combustible material, nor should this light be covered by flammable material.
- Please use listed waterproof strain relief bushing when connecting the supply cord to the outlet box.
- Use safety precautions. Safety eyeglasses and gloves are recommended.

## FCC NOTES

- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
  - Reorient or relocate the receiving antenna.
  - Increase the separation between the equipment and receiver.
  - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
  - Consult the dealer or an experienced radio/TV technician for help.