

Assembly Instruction Sheet #IS-1125C16-4

For Style IS-1125C16-4 (Nickel and Gun gold variant)

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutter, wire stripper, electrical tape, safety glasses.


Light Source: (4) SUGGESTED LED G9 BULB MAX 2W (Not Included).

Preparation: Identify and inspect all parts before beginning installation. Check the package content list and diagrams to ensure all parts are present. Do not attempt to assemble, install, or operate the fixture if any parts are missing or damaged. Contact customer service for replacement parts

Warnings and Cautions

- Turn off electricity at the circuit breaker or main fuse box before installation. Consult a licensed electrician if you are in doubt.
- These instructions are provided for your safety; it is very important you read them completely before installing the fixture.
- It is strongly recommended that a licensed, professional electrician perform the installation.
- Disconnect the fixture from the power source before replacing bulbs.
- Make sure bulbs are given sufficient time to cool before removal.

Package Contents



Hardware Contents

Part	Description	Quantity
AA	Screw	2 pcs
BB	Electrical Marrets	2 pcs
CC	Outlet Box Screw	2 pcs
DD	Mounting Screw	2 pcs
EE	Crossbar	2 pcs



Step 1: Attach Mounting Screws, Lock Washers and Hex Nuts to Crossbar

- Line up a set of holes on the Crossbar (EE) and the holes on the ceiling canopy.
- Thread the Mounting Screws (DD) into the holes on the Crossbar (EE).
- Pass Lock Washers and thread Hex Nuts onto the Mounting Screws (DD).
- Hand tighten until snug.


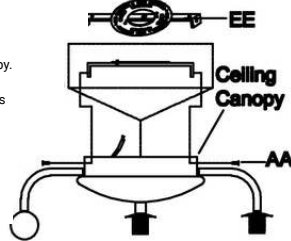


Figure 1

STEP 2 - Attach Crossbar to Outlet Box

- Pass the supply wires through the Mounting bracket (EE).
- Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw facing you.
- Secure it with Outlet Box Screws (CC).
- Tighten until snug.

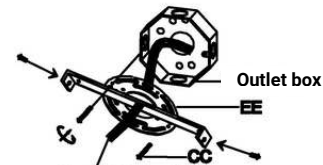

Supply wires with outlet box screws ground wires

Figure 2

Step 3: Fit Ceiling Canopy to Crossbar Assembly

- Fit the ceiling canopy to the Mounting Screws (DD) and secure with Screw (AA). The ceiling canopy should be snug against the ceiling and the Screw (AA).
- If the canopy is not snug: Adjust the length of the Mounting Screws (DD) by unscrewing the Hex Nut and Lock Washer, and then screwing the Mounting Screws (DD) in or out of the Crossbar (EE) until the correct length is achieved.
- Once the ceiling canopy is secure, remove the Screw (AA) and ceiling canopy and proceed to Step 4.

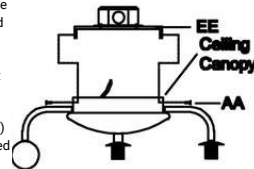


Figure 3

STEP 4 - Wire Connections

- Use standard wire connectors to make all wire connections.
- Twist connections until wires are lightly joined together.
- Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

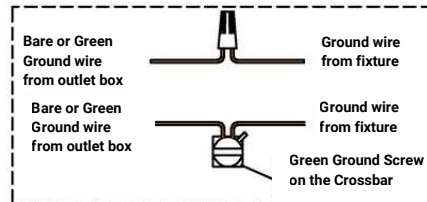
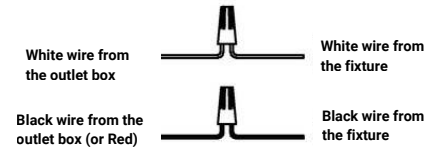


Figure 4

Step 5: Install Ceiling Canopy to Ceiling

- Carefully tuck all wires into the outlet box.
- Position the ceiling canopy of the Fixture Body (A) over the outlet box.
- Align the holes in the ceiling canopy with the Mounting Screws (DD).
- Secure with Screw (AA) and hand tighten until snug.

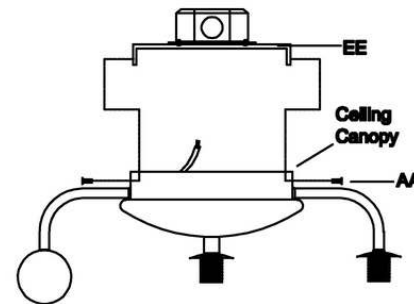


Figure 5

Step 6: Install Glass Shade and bulb

- Install bulbs into sockets and screw snugly into place. (Uses G9 LED bulb, not included).
- Put the Glass Shade (B) onto the Fixture Body (A).


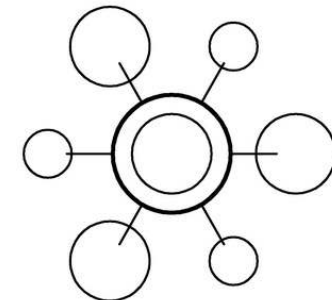
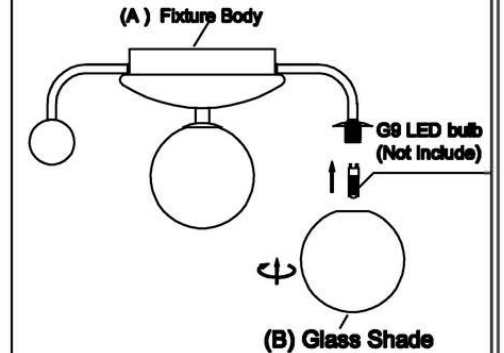


Figure 6

Assembly Instruction Sheet #IS-1125C24-9

For Style IS-1125C24-9 (Nickel and Gun gold variant)

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutter, wire stripper, electrical tape, safety glasses.


Light Source: (9) SUGGESTED LED G9 BULB MAX 7W (Not Included).

Preparation: Identify and inspect all parts before beginning installation. Check the package content list and diagrams to ensure all parts are present. Do not attempt to assemble, install, or operate the fixture if any parts are missing or damaged. Contact customer service for replacement parts

Warnings and Cautions

- Turn off electricity at the circuit breaker or main fuse box before installation. Consult a licensed electrician if you are in doubt.
- These instructions are provided for your safety; it is very important you read them completely before installing the fixture.
- It is strongly recommended that a licensed, professional electrician perform the installation.
- Disconnect the fixture from the power source before replacing bulbs.
- Make sure bulbs are given sufficient time to cool before removal.

Package Contents

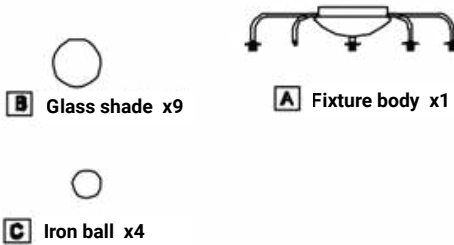

STEP 2 - Attach Crossbar to Outlet Box

- Pass the supply wires through the Mounting bracket (EE).
- Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw facing you.
- Secure it with Outlet Box Screws (CC).
- Tighten until snug.

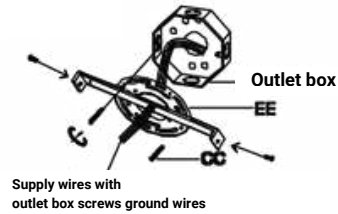


Figure 2

Hardware Contents

Part	Description	Quantity
BB	Wire nut	2 pcs
CC	Screw	2 pcs



Step 3: Fit Ceiling Canopy to Crossbar Assembly

- Fit the ceiling canopy to the Mounting Screws (DD) and secure with Screw (AA). The ceiling canopy should be snug against the ceiling and the Screw (AA).
- If the canopy is not snug: Adjust the length of the Mounting Screws (DD) by unscrewing the Hex Nut and Lock Washer, and then screwing the Mounting Screws (DD) in or out of the Crossbar (EE) until the correct length is achieved.
- Once the ceiling canopy is secure, remove the Screw (AA) and ceiling canopy and proceed to Step 4.

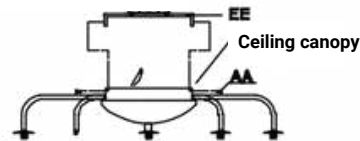


Figure 3

STEP 4 - Wire Connections

- Use standard wire connectors to make all wire connections.
- Twist connections until wires are lightly joined together.
- Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

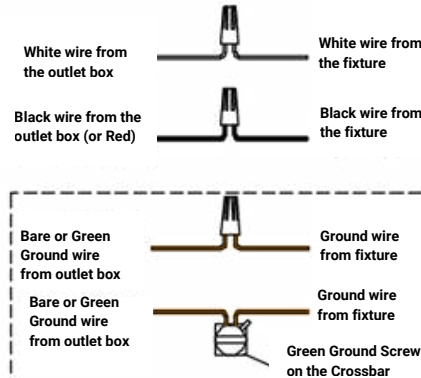


Figure 4

Step 5: Install Ceiling Canopy to Ceiling




Figure 5

Step 6: Install Glass Shade and bulb

- Install bulbs into sockets and screw snugly into place. (Uses G9 LED bulb, not included).
- Put the Glass Shade (B) onto the Fixture Body (A).

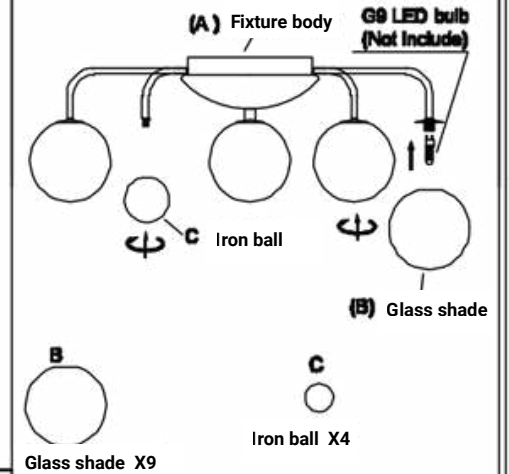


Figure 6