


EN

DE

FR

IT ES

Scan the QR code  
on the last page

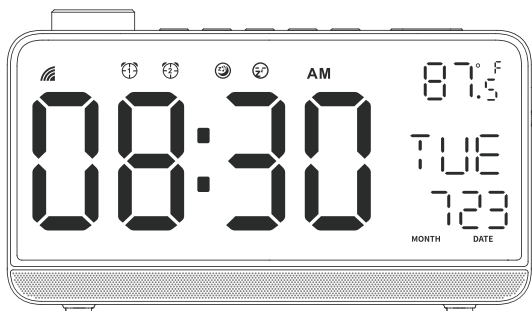





## Smart 12-inch alarm clock radio (SAF004S)

### Instructions





Please read the instructions carefully before using and keep it with proper storage

(V2.0)

## Elements

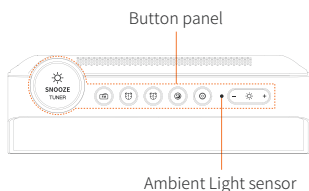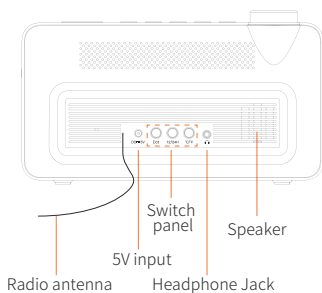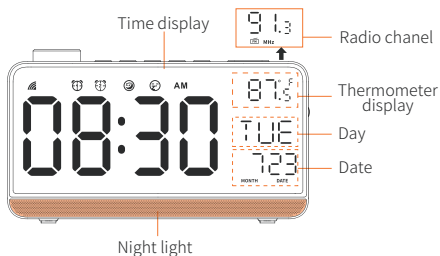

## Controls

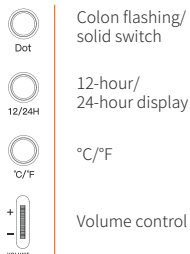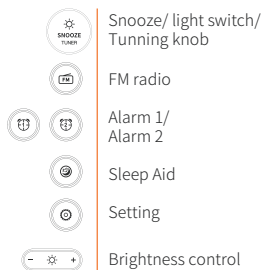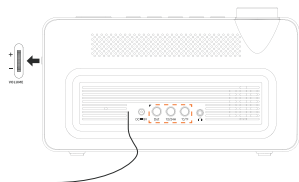

## Quick guidance

### Radio



FM radio



Rotate to change radio stations



Volume control

press to turn on/off FM radio

Scroll up and down to adjust the volume

Press and hold to automatically scan and save radio stations

Slowly rotate to find radio stations; fastly rotate to switch to saved stations

### Alarm clock



Alarm 1



Alarm 2

Press / to turn on/ off the alarm

Press and hold / to set the alarm, rotate to adjust the hour and alarm volume

### Sleep-aid



Sleep-aid

press to switch on/ off sleep-aid mode

press and hold to enter setting, rotate to choose options, press to apply

### Night light mode




Night light



Brightness control

press to switch on/off night light

use to adjust the brightness level



### Additional settings



press to turn on/off flashing colon(delimiter)



press to switch to 12-hour clock/ 24-hour clock



Press to switch to °C/°F

### General settings



Setting

Press to adjust the brightness of the screen

**Attention:** The screen brightness is self-adjusting according to ambient lighting brightness under Automatic mode.

Press and hold to enter time setting, rotate to calibrate the date, day and hours, press again to apply.

### Wi-Fi connecting

Plug in, flashes to enter Wi-Fi connecting status. If Wi-Fi connection fails, press and hold to enter compatible mode.

If stays solid (no flashing at all), press and hold both ends of to enter Wi-Fi connecting status ( flashes after successfully entered Wi-Fi connecting status)

**Attention:** During the connecting process, if there is no action within 15 seconds, SAF004S would resume to its home screen.

## Feature description

- SAF004S is a piece of smart furnishing that combines the functionalities of a digital alarm clock, a weather display, radio, an Amber LED light night, and a sleep-aid white noise machine.
- The 15° incline design on the screen positioning works better with average eye-level height (in America), provides a comforting look with its soothing night light.
- Conspicuous display with 2.2 inches on single digit from a 9-inch screen, switchable from am/pm to 24-hour system. 4 adjustable brightness levels for time display (time display can also be shut off solely as well as automatically adjust its brightness level accordingly via its built-in ambient light sensor).
- Multi-element digital screen, shows weather/temperature/date/day in real time.
- Easily switch from 12-hour clock to 24-hour clock.
- Hi-Fi speaker, delivers high quality audio output.
- Radio stations auto-scanning, stores up to 60 stations, can be paired with 3.5mm headphones. 2 separated alarms with 6 nature sound options (all sounds from radio can be used alarm sound as well).
- Muted night light with designed white noise or radio sound as a sleep-aid, you can set an off-timer with the light gradually dims and the sound slowly mutes while you fall asleep.
- Built-in amber-color light strip, brightness level adjustable from level 1-10, offers soft, warming lighting.
- Auto time calibration with local time zone (syncs with daylight-saving time).
- Remote control by smartphones via App.
- Remote control by major smart home voice assistants (Amazon Alexa, Google Home).

## App guidance

### Wi-Fi setup

#### 1. Download the app


Download "smart life" app from App Store/Google Play or Scan the QR code, sign up and log in.

Attention: turn on GPS location, Wi-Fi (2.4 GHz only) and bluetooth before connecting SAF004S to your Wi-Fi (2.4 GHz only), then you can choose auto-search and connect or manually connect.



#### 2. Wi-Fi connecting mode

- ① Plug in to power, the flashing "📶" indicates the SAF004S is now under Wi-Fi connecting mode
- ② If the "📶" stays solid, press and hold both left and right end of "⊖ \* ⊕" till "📶" flashes. Again, the flashing "📶" indicates SAF004S is now under Wi-Fi connecting mode



Hold and press both ends simultaneously




Attention: Only connects to 2.4 GHz Wi-Fi.

## Link up with App

### App auto-search and connect

① Open up “Smart Life” App, click “+” ;

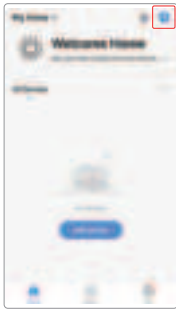


② Click on “Go to add” ;



③ Click on “+” again after SAF004S icon “Smart Alarm Clock” shows up with a “✓” ;



④ Type in 2.4 GHz Wi-Fi password and click on “Confirm” (make sure the smartphone and Smart Life app are both connected to 2.4 GHz Wi-Fi);

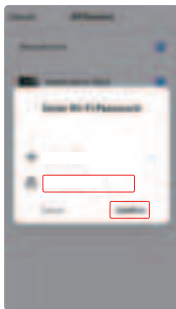

⑤ Put SAF004S, smartphone and the router in the same area when connecting, preferably short distance;




⑥ You can edit a new name for SAF004S after it successfully connects to your 2.4 GHz Wi-Fi, click on “Done” to complete the Wi-Fi setup process, when re-entering the App, the “📶” stays solid and high-lighted.



# App settings page

## 1. User interface

Day/Date/Time/  
Temperature display

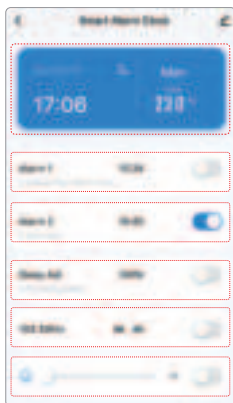

Alarm 1 switch/setting

Alarm 2 switch/setting

Sleep-aid setting

Radio setting


Night light setting

## 2. Time, brightness, temperature scale, alarm setting

① SAF004S automatically calibrates with real time after successful Wi-Fi connection, you can also manually calibrate the time and switch between duodecimal hour system(12-hour clock) and military time(24-hour clock) on the app;

② Tap the time display section to enter SAF004S setting page, it allows you to customize your desired screen display with all the detailed settings;

③ Click “Save” to save all the settings and exist.

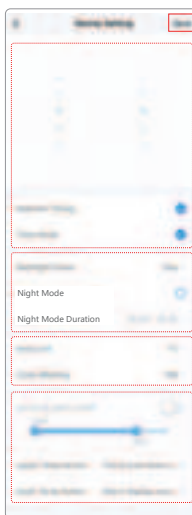

① Uncheck the “Network Timing” to manually adjust the time

② Uncheck the “Time Mode” to show 12-hour clock system, check the “Time Mode” to show 24-hour clock system

① 4 options of brightness control

② The digital light dims its brightness to 10% within the preset daily duration when choosing the “Night Mode”

③ Set the daily duration for “Night Mode”

① Temperature display switch between °C/°F

② Colon (delimiter) display status: flashing/solid

① Set a safe temperature range, alarm beeps when the detected room temperature exceeds or fall out of the set range. Turn on/off the switch to activate/deactivate this function

② Sound alarm: silence/ single beep/ continuous beep

③ Display alarm: no flashes/ single flash/ continuous flash

### 3. Temperature display and data


- ① Automatically save and upload temperature data, available for statistical review;
- ② Tap the temperature section to observe the temperature data throughout the whole day/ week/ month/ year.



### 4. Alarm clock setting

Take Alarm clock 1 as a demonstration

- ① You are able to turn on/off both alarm clocks (alarm clock 1 and alarm clock 2) from the main interface;
- ② Tap “Alarm 1” section, enter the “Alarm 1 Setting” page, customize all the settings to your liking;
- ③ Tap “Save” to save and exit.

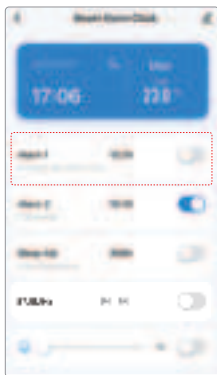

## 5. Sleep-aid settings

- ① You are able to turn on/off sleep-aid mode from the main interface;
- ② Tap “Sleep Aid” section, enter the “Sleep Aid Setting” page, customize all the settings to your liking;
- ③ Tap “Save” to save and exit.




## 6. FM radio settings

- ① You are able to turn on/off FM radio from the main interface;
- ② Tuner: tap “Radio” section to enter the tuning page, swipe left and right to select FM frequency;
- ③ FM scanning: tap “Search Radio” to auto-scan between the range of 87.5 MHz to 108MHz;
- ④ Switching frequency: after searching the station, a blue dot appears on the frequency band, marking the audible frequency, and you can click on the previous station/ next station to switch the searched effective station.




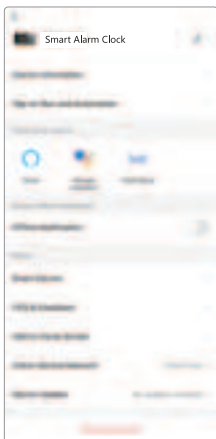
## 7. Night light settings

- ① You are able to turn on/off night light, control the brightness level from the main interface;
- ② Tap “Night” section to enter “Night” page, adjust the brightness level.

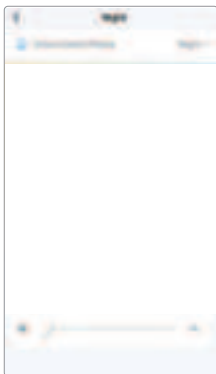

## 8. Other Settings

Click “” in the upper right corner to enter, on this screen you can view device information.Third party control guidelines, offline Wake up, remove the device and so on.



## Voice control

### Take "Alex" connecting setup as an example

Attention: make sure SAF004S is already linked with the Smart Life App.

- ① Download "Amazon Alexa" from Google Play/App Store and sign up; (If you are already an Alexa user, you can just open it)
- ② Choose Skills&Games, search Smart Life and enable Smart Life.




- ③ Log in with the user name and password registered in the "Smart Life" APP, and authorize Alexa to obtain relevant information. When the authorization successfully displays "Smart Life has been successfully Linked", you can use the Echo speaker to control the smart big screen alarm clock.



④ Open Smart Life App to check if the third-party control has linked, if it shows yes, it means the two accounts has linked up on cloud. You can rename the device with Smart Life App and Alexa will automatically synchronize the new name via cloud.

Attention: You can also have Alex to discover new device and repeat the linking process to re-link with the re-named device via Smart Life App.(only an optional operation)

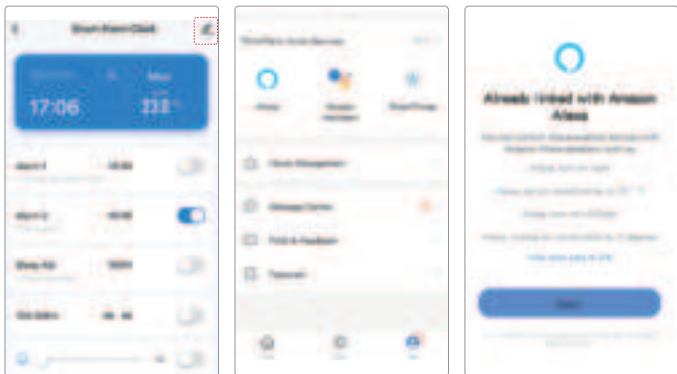

## Voice control demonstration

You can re-name all the functions of SAF004S, Alex will sync with tne new names and recognize them as voice commands.

Works with Alex/Google.

Attention: Minor delay might occur due to various Wi-Fi speed and cloud processing system, when SAF004S or Alexa fail to react to voice control, please wait for a few minutes and try again.

Here are some things to try

“Alexa, turn on/off the alarm”

“Alexa, turn on/off the light”


“Alexa, Change Light to 20%”


“Alexa, turn on/off the sleep”



“Alexa, turn on/off the radio”

## Set the functions



## 1. Set the time and date

① Plug in to power, press and hold  to enter the date/time setting;





② Rotate  to change the calendar year, press  to apply and enter calendar month setting;






③ Rotate  to change the calendar month, press  to apply and enter calendar day setting;






④ Rotate  to change the calendar day, press  to apply and enter time setting;



⑤ Rotate  to change the hour, press  to apply and enter minute setting;




⑥ Rotate  to change the minute, press  to complete the time setting.



## 2. Brightness control


Plug in to power, press  to adjust the brightness on display screen, in the order of “day” “night” “closed” “Auto” .

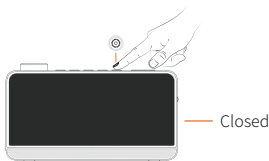

Attentions: blocking the ambient light sensor when set in AUTO brightness mode might affect the functioning of the brightness self-adjustment.


### 3. Colon(delimiter) flashing/solid switch (flashing by default)

Press  to turn on/off flashing colon(delimiter).

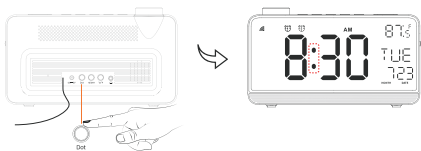


### 4. 12-hour/24-hour clock display switch(12-hour clock system by default)

Press  to switch between 12-hour clock/ 24-hour clock.

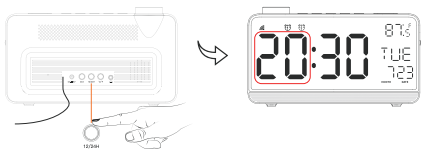


### 5. Temperature display switch between °C/°F(°F by default)


Press  to switch between °C/°F display.

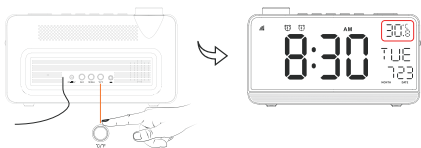

## FM radio


### 1. Turn on/off FM radio

① Turn on the FM radio: click the  key to turn on the FM radio. (default frequency 87.5MHz), the screen displays the radio icon;



② Turn off the FM radio: click the  key again to turn off the FM radio, the radio icon disappears and the screen displays the temperature icon (Fahrenheit);



## 2. Set the FM radio

① Auto-scanning: under FM radio mode, press and hold  to automatically find radio stations between 87.5MHz-108MHz, all radio stations found will be saved and the first found accessible radio station will be entered and displayed.




② FM radio stations tuning: fastly rotate  to switch between saved radio stations, slowly rotate  to manually find radio stations.




## Alarm Clock

### 1. Turn on/off alarm (take alarm 1 as demonstration)

① Under time-display interface, press  to turn on alarm clock. the flashing digital lights indicates the alarm time, corresponding alarm clock icon stays solid.



② After turning on the alarm clock, press  to turn off the alarm clock, corresponding alarm clock icon turns off as well.





### 2. Separated setting



SAF004S comes with two alarm clocks in order to provide alarming at two different times, both alarms should be set under completely the same process. For instance, you can set “alarm 1” as your morning wake-up alarm, and “alarm 2” as your afternoon nap alarm.

SAF004S can set week-day alarms and weekend-alarms via Smart Life App directly.



### 3. Alarm setting (take alarm 1 as demonstration)


① under time-display interface, press and hold  to enter alarm setting mode, alarm icon flashes;






② Rotate  to change the hour, press  to apply and enter minute setting;







③ Rotate  to change the minute, press  to complete the time setting and enter the alarm sound selecting.



- ④ rotate  to select the alarm sound (S-01 to S-06 are nature sounds, F-07 uses FM radio as alarm sound) press  to apply and complete alarm setting.




- ★ Uses FM radio as alarm sound: tune in to F-07 when selecting alarm sound, press  to enter FM radio station selecting, then rotate  to select the desired radio station, press  to complete FM radio alarm sound setting and turn on alarm mode.



Attentions: use  to control the volume of alarm sound.

## Snooze (gives you multiple 9-minute naps before completely waking up)

### Activate/Deactivate snooze mode

- ① During the alarm beeping, press  to enter snooze mode(alarm sound pause for 9 minutes), light digits flash. you can enter snooze mode repeatedly up to 5 times;
- ② Under snooze mode, press the corresponding alarm clock button to exit;




- ③ Double-press alarm clock button to shut down the alarm completely.





The alarm gets automatically shut down completely after 30 minutes of beeping without any operation on SAF004S.

## Sleep-aid mode

### 1. Activate/deactivate sleep-aid mode


① Under time-display interface, press  to turn on sleep-aid, the preset duration of sleep-aid mode off-timer will be displayed for 3 seconds with sleep-aid icon stay solid;

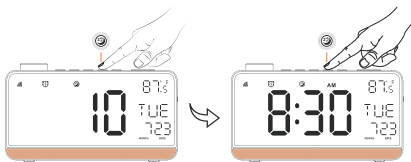




② Press  to deactivate sleep-aid mode, with sleep-aid icon turns off.






### 2. Sleep-aid settings

① Under time-display interface, press and hold  to enter sleep-aid setting mode, sleep-aid icon flashes.





② Rotate  to select sleep-aid sound (S-01 to S-04 are sleep-aid white noise simulating great nature sounds, F-05 uses FM radio stations as sleep-aid sounds), press  to apply and enter night light brightness control.






★ Uses FM radio as sleep-aid sound: tune in to F-05 when selecting sleep-aid sound, press  to enter FM radio station selecting, then rotate  to select the desired radio station, press  to complete FM radio sleep-aid selecting and enter night light brightness control.



③ Rotate  to control the night light brightness. (up to 10 levels of brightness optional, level 8 by default)




- ④ Rotate  to adjust the sleep-aid mode duration (from 5 to 120 minutes, 30 minutes by default), press  to apply and activate sleep-aid mode.



Attentions: use  to control the volume of sleep-aid sound.

## Night light mode

### 1. Turn on/off night light



- ① Press  turn on night light (shows you the brightness level for 3 second, level 8 by default);





- ② Double-press  to turn off the night light;




### 2. Night light brightness control

After turning on the night light, press  “+” to brighten the night light, press  “-” to darken the night light. (from level 1 to level 10)




## USB charging output

USB 5V output, available for charging.





## Specification

Model	SAFW004S
Size	220×126.6×71.6mm
Weight	374g
Color	Black
Material	ABS+PC、metal
Communication mode	Wi-Fi (2.4G)+BLE module
FM radio frequency	87.5-108MHz
Control mode	Button control, APP control, Voice control (connect to third-party smart speaker)
Input	DC 5V-2A
Output	USB A 5V-1A
Power	10W (MAX)
Speaker	4Ω 3W
Packing list	Smart Large Display Radio Clock , user guide, adapter (optional), charging cable (optional)
Certification	

## FAQ

### 1. Device connection failed.

- ① Please put the router, device and mobile phone as close as possible;
- ② Please confirm whether the Wi-Fi signal is normal (support 2.4 GHz Wi-Fi network only);
- ③ Please Press and hold the  at the same time until the Wi-Fi indicator on the top “” flashes quickly to re-enter the pairing mode, and then try to connect to the network again.

### 2. Bluetooth connection failed.



- ① Please confirm whether the mobile phone Bluetooth is enabled;
- ② Please confirm whether the device has been connected to another Bluetooth device.

### 3. APP cannot control the device.

It could be a network problem or the device is offline.

- ① Please confirm whether the device is powered on;
- ② Please confirm whether the Wi-Fi signal is normal (support 2.4 GHz Wi-Fi network only). It is suggested that you can keep the APP open and wait for about 2 minutes to check whether the device is still online;
- ③ If the device is still online, put your mobile phone next to the device, then connect to the same Wi-Fi as the device, and try to open the web page to see whether it is smooth to determine the network condition;
- ④ Exit the APP or clear cache in the APP settings, and then re-open the APP and try again.

#### 4. How to reset Wi-Fi.

Press and hold the  at the same time until the Wi-Fi indicator on the top “” flashes quickly, indicating that the Wi-Fi reset is successful. If failed, power off the device and try again.

\* Resetting Wi-Fi will remove the connected device and the setting.

#### 5. The device status cannot be synchronized with the APP.


- ① Please confirm whether the device is connected to the network;
- ② Confirm the network is successfully connected. Use the APP to control the device and check whether the device status is synchronized with the APP.

#### 6. After the device is connected to the network, it can be controlled in the same place, but it cannot be remotely controlled if the phone is changed to another place or other network.

It is possible that the device and the phone are connected to the same LAN, but are not connected to the network.

- ① Please put your mobile phone next to the device, and then connect to the same Wi-Fi as the device, try to open the web page to see whether it is smooth to determine if the Wi-Fi signal is normal;
- ② If you cannot access the network, it is recommended to restart the router.

#### 7. Others

If the device has been connected to the network and the problems above still occur, please enter the home page of the APP, tap “” in the upper right corner, enter the “FAQ & Feedback” page, tap “More” to enter the problems you have encountered and then submit.

### Cautions

- Please use the product correctly according to the instructions. Disassembling and collision are strictly prohibited.
- Please place the product on a stable, horizontal, and non-smooth surface.
- Do not use it in high temperature, humidity and corrosive environment to avoid electric leakage due to circuit damage.
- Please keep it in a proper place and out of reach of children to avoid accidents.
- This product is not fireproof, do not throw it into the fire, and do not place it close to any fire source.
- This product is not waterproof, do not put it into the water to avoid damage.

### Storage

- Please wipe the product with a soft cloth.
- Do not scrub the product with abrasive cleaner, rough chemical, alcohol or acetone detergent to avoid damage to the surface of the product.
- Store the product in a safe, dry place where it will not be crushed, bruised or damaged.
- Do not wrap the power cord around the appliance during storage.

Escanee el código para  
obtener el manual



Español

Scansiona il codice per  
ottenere il manuale



Italiano