



User Manual

HDMI V2.1 SWITCH 4x1

8K@60Hz 8bit YUV4:4:4
4K@120Hz 8bit YUV4:4:4
CEC/ARC

EZ-SW41H21

Make Installation Easy

OVERVIEW


4-Port HDMI Switch

The 4- Port HDMI switch allows 4 HDMI ports to be switched to a single display terminal via remote control or buttons on unit. This HDMI Switch supports video formats including 720p, 1080i , 1080p, 4K/120Hz, 8K/60Hz.

FEATURES

- Support HDMI2.1
- Supports highest video resolution 4K/120Hz,8K/60Hz
- Support HDR Dolby vision,Dolby Atmos
- Support 3D
- Support 24/30/36 bit deep color
- Support CEC/ARC pass through
- Supports single high definition display for multiple sources, such as DVD Players, PS5 and HD players, Set Top Boxes
- Needs 5V/2A power adapter


PRODUCT DIAGRAM

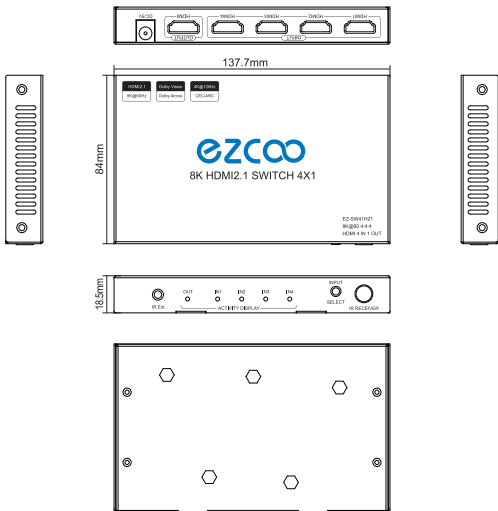

Package Accessories:

- ❶ HDMI switcher x1
- ❷ IR remote control x1
- ❸ 5V power adapter x1
- ❹ User manual x1
- ❺ IR extender cable x1

INSTALLATION

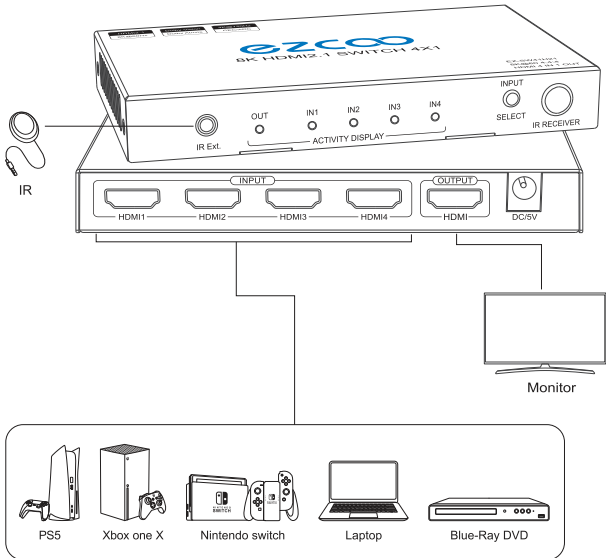

1. Connect HD signal sources into HDMI switch input with 4 HDMI2.1 cables
2. Connect 1 HDMI display source into HDMI switch output with 1 HDMI2.1 cable
3. Connect the switcher with 5V/2A power adapter

SPECIFICATIONS

HDMI version	HDMI 2.1	HDMI version	HDCP 2.3
HDMI resolution	Up to 8K/60Hz YUV4:4:4 8bit	Video format	24/30/36 bit deep color
Audio format	DTS-HD/Dolby-Atmos/DTS/Dolby-trueHD/DSD		
Power adapter format	AC(50HZ,60HZ)100V -240V; Output: DC5V/2A	Max working current	1500mA
Operating Temperature range	(-10 to +55C)	Max baud rate	18Gbps
Dimension (LxWxH)	137.7x84x18.5 (mm)	Weight	90g

USING TIPS

- 1.Re-powering and unplugging the HDMI cable is a common troubleshooting method.
- 2.When you install this KVM switch for the first time, please keep the computer connected to the Internet. After connecting the USB cable and power on, wait about a minute, KVM will automatically download and install the driver.
- 3.If you want to use the hotkey function, please make sure the keyboard is USB1.1 version and connected to USB 1 (with keyboard icon)
- 4.Please use qualified or brand-new HDMI 2.0 standard cable less than 3 meter.
- 5.Hold the select button 5 seconds till input LED blink 3 times as RESET, to solve picture flash/black issue.

NOTES

Please use this machine based on below instructions to keep longer lifetime.

1. The machine should be placed at the spot far away from the Damp, High-Temperature, Dusty, Erosive, and Oxidant environment.
2. All parts will be free from the strong shake, hit, fall.
3. Touching the device with the wet hands is prohibited.
4. Please turn power off when machine is not used for long time.
5. Please do not open the cover and do not touch the inside parts.
6. Please use the original factory power adaptor.
7. Before power on, please check the connection cable carefully. And make sure that all interfaces are normally connected.

DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate. EZCOO TECHNOLOGY INC. assumes no responsibility for any infringement of patents or other rights of third parties which may result from its use. EZCOO TECHNOLOGY INC. assumes no responsibility for any inaccuracies that may be contained in this document. EZCOO TECHNOLOGY INC. also makes no commitment to update or to keep current the information contained in this document. EZCOO TECHNOLOGY INC. reserves the right to make improvements to this document and/or product at any time and without notice.

CONTACTS

When you need any technical assistance, please send e-mail to support@easycoolav.com

Visit to learn more.

<https://www.easycoolav.com>



EZCOO TECHNOLOGY INC
support@easycoolav.com
<https://www.easycoolav.com>