

Reference 1000SSL

Subwoofer Owner's Manual

EN

Mode d'emploi du caisson de graves

FR

Manual del propietario del subwoofer

ES

低音炮用户手册


ZH-CN

Buku Panduan Pemilik Subwoofer

ID

서브우퍼 사용 설명서

KO

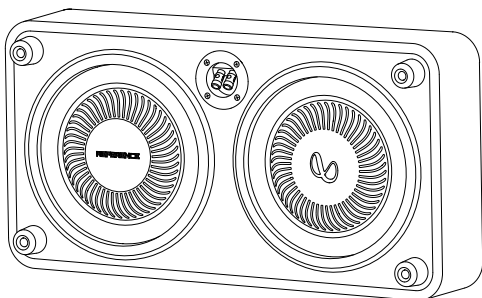

Reference 1200SSL

THANK YOU FOR CHOOSING THIS INFINITY PRODUCT

This product has been designed to deliver great bass performance from a compact, easily installed enclosure. To get the best performance from your enclosure, we strongly recommend that you entrust installation to a qualified professional. Although these instructions explain how to install your enclosure in a general sense, they do not show specific installation methods that may be required for your particular vehicle. If you do not have the necessary tools or experience, do not attempt the installation yourself. Instead, please ask your authorized INFINITY car audio dealer about professional installation. To help us serve you better if your enclosure ever requires warranty service, please retain your original sales receipt and serial number.


INSTALLATION WARNINGS AND TIPS

INSTALLATION TIPS

- Always wear protective eyewear when using tools.
- Turn off all audio components and other electrical devices before you start. Disconnect the negative (-) lead from your vehicle's battery.

SPEAKER CONNECTIONS

Connect the + and - terminals on the enclosure to the amplifier's outputs, observing proper polarity. Use at least 4mm² (11 AWG) speaker wire for the connections to the enclosure.

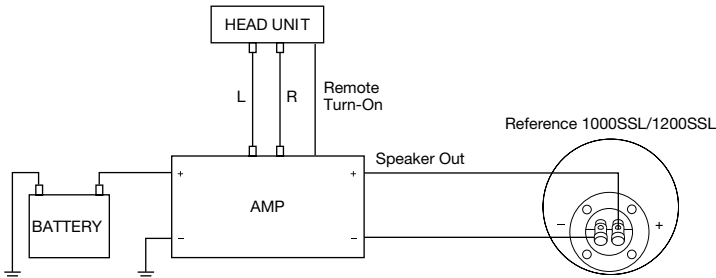

SPECIFICATIONS

	REFERENCE 1000SSL	REFERENCE 1200SSL
Subwoofer:	10" (250mm) Aluminum Driver	12" (300mm) Aluminum Driver
Power Handling:	350W RMS, 1050W peak	400W RMS, 1200W peak
Sensitivity (1W/1m):	82.5dB	85dB
Frequency Response (-6dB):	35Hz - 400Hz	30Hz - 400Hz
Nominal Impedance:	2 ohms	2 ohms
Voice Coil Diameter:	2" (50mm)	2" (50mm)
Enclosure dimensions:	334mmD x 630mmW x 115mmH 13-1/8"D x 24-7/8"W x 4-1/2"H	370mmD x 700mmW x 125mmH 14-5/8"D x 27-5/8"W x 4-7/8"H
Enclosure materials:	3/4" (18mm) MDF with black carpet covering	3/4" (18mm) MDF with black carpet covering

GENERAL CARE

The loudspeaker may be cleaned with a damp cloth. Do not use any cleaners or solvents.

A valid serial number is required for warranty coverage. This product is designed for mobile applications and is not intended for connection to the mains.

- Check clearances on both sides of a planned mounting surface. Be sure that screws or wires will not puncture brake lines, fuel lines or wiring harnesses, and that wire routing will not interfere with the safe operation of the vehicle.
- When making electrical connections, make sure they are secure and properly insulated.
- Before drilling or cutting holes, use a utility knife to remove unwanted fabric or vinyl, to keep material from snagging in a drill bit or saw.
- Do not mount speakers where they will get wet.

CHOOSING A MOUNTING LOCATION FOR THE ENCLOSURE

Choose a mounting location that doesn't interfere with cargo, the fold-down rear seat or the trunk lid. The best location is usually a corner of the trunk or cargo area. Securely mount the enclosure to the mounting surface.

WARNING: Playing loud music in an automobile can permanently damage your hearing as well as hinder your ability to hear traffic. Listening at low levels while driving is recommended. HARMAN International accepts no liability for hearing loss, bodily injury or property damage resulting from use or misuse of this product.




Harman International Industries,
Incorporated 8500 Balboa Blvd,
Northridge, CA 91329, UNITED STATES.
www.infinityspeakers.com

© 2024 HARMAN International Industries, Incorporated. All rights reserved.
Infinity is a trademark of HARMAN International Industries, Incorporated,
registered in the United States and/or other countries. Features, specifications
and appearance are subject to change without notice.

REFERENCE

SUBWOOFER SHALLOW ENCLOSURES

 **Infinity**
by HARMAN

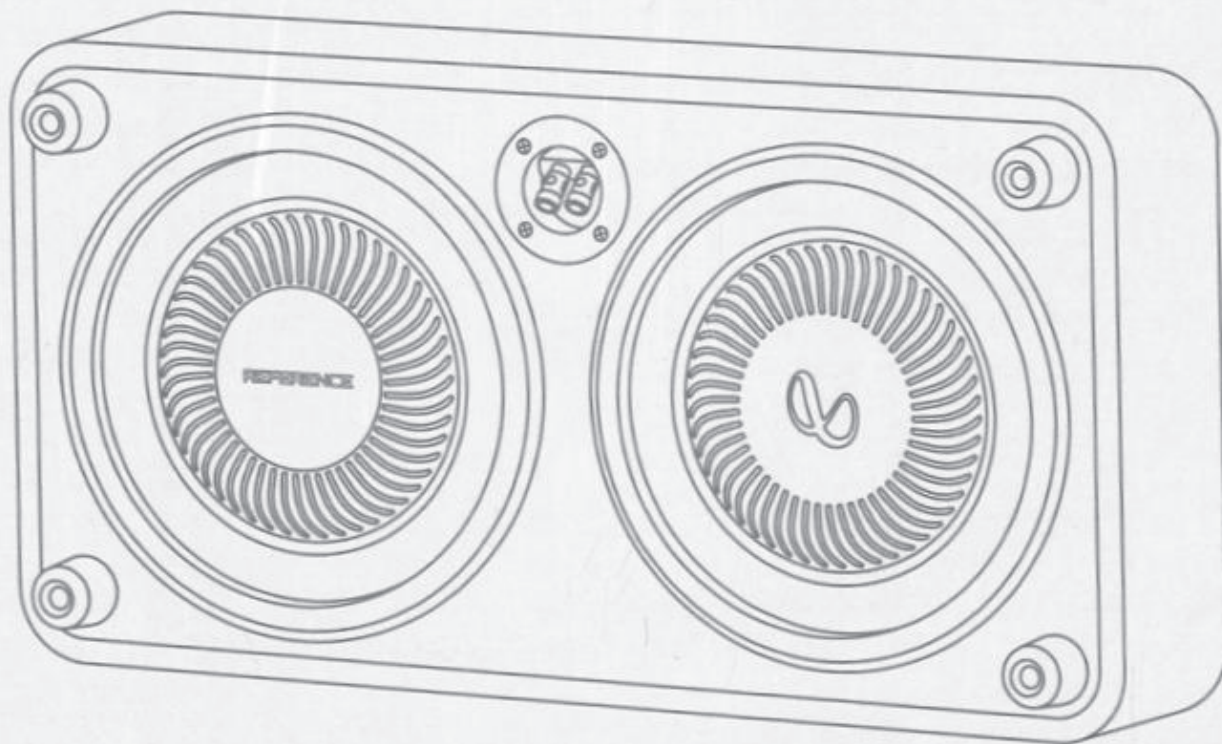

OWNER'S
MANUAL

REFERENCE 1000SSL / REFERENCE 1200SSL