

5/6" GIMBAL SELECTABLE RETROFIT LED LIGHT


Gimbal optic swivels 360° and tilts up to 45° to aim light where needed. Choose from 5 color temperatures during install. Very wide 90° beam angle lights a large area. Ideal for vaulted ceilings and artwork. This 12W LED is comparable to 60W. Adjusts to fit 5" or 6" cans.

MODELS

DL_G56-12W-27K_5K



LIGHT DISTRIBUTION ANGLE

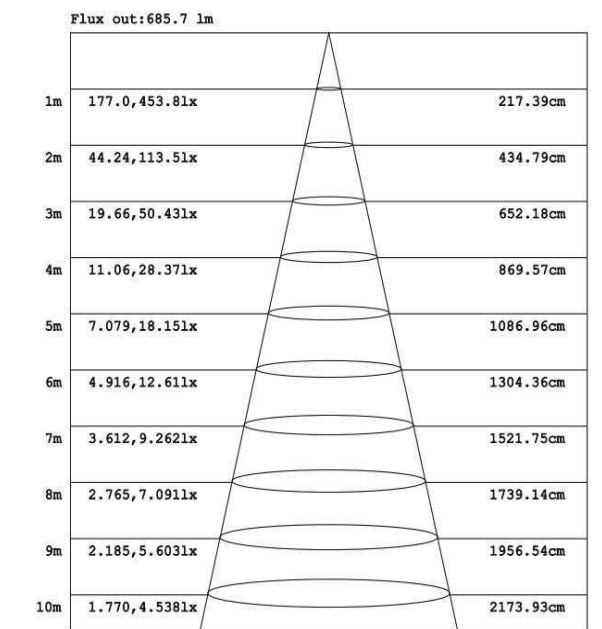

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

SPECIFICATIONS

Voltage	120 V
Wattage	12 W
Power Factor	0.7

LIGHTING PERFORMANCE

Lumens	800 lm
CCT	2700 K, 3000 K, 3500 K, 4000 K, 5000 K
CRI	80+
Beam Angle	90°
Dimmable	YES
Efficacy	66.66 lm/W

ENVIRONMENT

Operating Temperature	-4 °F to 104 °F
Moisture Rating	Damp Rated

CONSTRUCTION

Housing Material	PLASTIC
Weight	0.75 lbs

LIFESPAN

Average Lifetime	50,000 Hours
Warranty	7 Years

CERTIFICATIONS



5/6" GIMBAL SELECTABLE RETROFIT LED LIGHT

Gimbal optic swivels 360° and tilts up to 45° to aim light where needed. Choose from 5 color temperatures during install. Very wide 90° beam angle lights a large area. Ideal for vaulted ceilings and artwork. This 12W LED is comparable to 60W. Adjusts to fit 5" or 6" cans.

BRAND	MODEL
LUTRON	CTCL-153PDH-WH
LUTRON	DVCL-153P-WH
LUTRON	DVELV-300P-WH
LUTRON	DVRP-253P-WH
LUTRON	IPI06-1LZ
LUTRON	LGCL-153PLH
LUTRON	MACL-153MH-WH
LUTRON	MSCL-OP153M
LUTRON	PD-6WCL-WH
LUTRON	P-PKG1WB-WH
LUTRON	P-PKG1W-WH
LUTRON	STCL-153PH-WH
LUTRON	TGCL-153PH-WH
LUTRON	TTCL-100H-BR
LEVITON	06674-002-10W
LEVITON	6672-1LW
LEVITON	6674-10W
LEVITON	D26HD-2RW
LEVITON	DDE06-BLZ

We highly recommend using a ELV (electronic low voltage) dimmer compatible with LED lights. Buzzing or flickering is typically an indication that the dimmer and lights used are not compatible. Please consult dimmer manufacturer for maximum wattage capacity.

*May experience "pop-on" behavior, in which lights cannot be turned on immediately to their minimum level. To resolve this issue, first raise the slider switch above the minimum level to turn the lights on, then dim to a lower light level as needed.