

6" SLIM SELECTABLE WHITE LED LIGHT



Select the CCT of this dimmable Slim LED downlight during install with the slider switch on back of the included j-box to select preferred color (2700K, 3000K, 4000K, 5000K, 6000K). This 6" 14W Slim is a 100W equivalent and is IC rated. Install fast with spring-loaded brackets.

MODELS

DL_SL6-14W-27K_6K-#PK



LIGHT DISTRIBUTION ANGLE

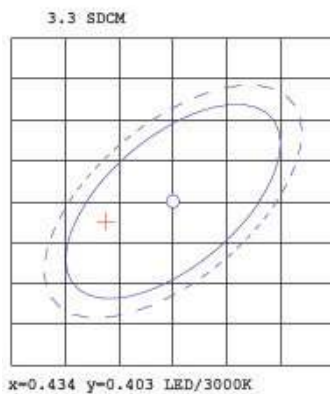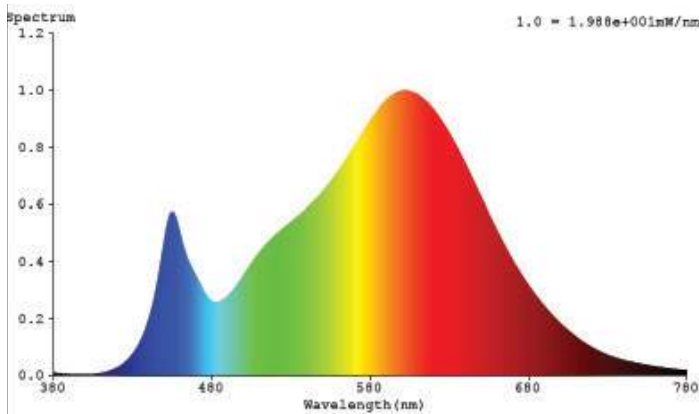

CIE1931 Chromaticity Diagram

CERTIFICATIONS



SPECIFICATIONS

| | |
|--------------|--------|
| Voltage | 120V |
| Wattage | 14W |
| Current | 0.126A |
| Power Factor | 0.9 |

LIGHTING PERFORMANCE

| | |
|-----------------------|-------------|
| Lumens | 850 lm |
| Equivalency | 60W |
| Frequency | 60 Hz |
| Color Rendering Index | 80 |
| Beam Angle | 90° |
| Dimmable | Yes |
| Efficacy | 60 lm/w |
| Color Temperature | 2700K-6000K |

ENVIRONMENT

| | |
|-----------------------|-------------|
| Operating Temperature | 4°F - 104°F |
| Moisture Rating | Damp |

CONSTRUCTION

| | |
|------------------|---------------|
| Housing Material | Polycarbonate |
| Weight | 0.96 lbs |

LIFETIME

| | |
|------------------|-------------|
| Average Lifetime | 35,000+ hrs |
| Warranty | 7 Years |