

## 12V TESTER KIT

### INSTALLATION INSTRUCTIONS

**⚠ WARNING:** The attachment and installation of this product is beyond the control of Winston Products, LLC. Winston Products, LLC is not responsible for the attachment or the installation of this product. Winston Products, LLC is not liable for damages and/or injuries that are the result of improper use/attachment or are the result of use beyond the intended towing application. The liability of this product is limited to the purchase price if it proves to be defective in material and/or workmanship. Any and all warranties, explicit or implied, are void if the product is damaged or worn.

#### WIRE PROBE TESTER:

1. Connect alligator clip to metal surface.
2. Activate a function on the tow vehicle (turn signals, taillight, brake).
3. Grasp corresponding function wire and pierce wire through insulation or connect probe tip to hole/terminal on connector.
4. Red LED light will illuminate on tester if wire/terminal is active.

#### 4-FLAT CONNECTOR TESTER:


1. Insert into tow vehicle 4-flat
2. Activate a function on the tow vehicle (turn signals, taillight, brake).
3. Corresponding LED light on tester will illuminate if function is active.

#### NOTES:

If the LED does not glow, check ground connection.

Ensure wire insulation has been sufficiently pierced and probe has reached copper wire.

Ensure fuses on tow vehicle are operational.

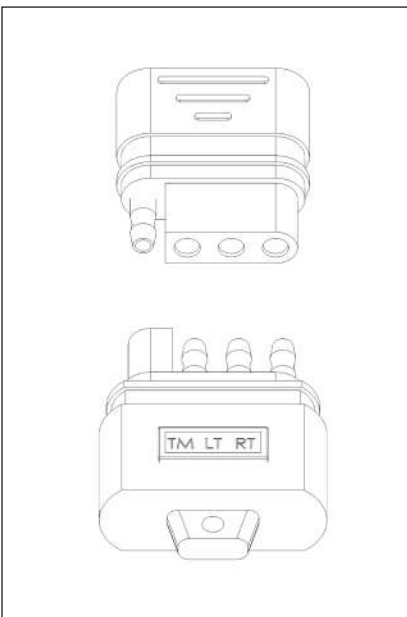

IF YOU EXPERIENCE ANY PROBLEMS WITH YOUR TOWSMART PRODUCT DO NOT RETURN THE UNIT TO THE RETAILER FROM WHICH IT WAS PURCHASED. INSTEAD, PLEASE CALL 1-844-295-9215 FOR ASSISTANCE WITH ANY PROBLEMS. WARRANTY INFORMATION IS AVAILABLE UPON REQUEST AND CAN BE FOUND ONLINE AT [WWW.TOWSMART.COM](http://WWW.TOWSMART.COM).



A Winston Products Company  
TOWSMART.COM  
WINSTON PRODUCTS, LLC.  
30339 Diamond Parkway  
Cleveland, OH 44139