

Patent No. D740329



MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
Tel: (502) 778-2731 • 1 (800) 928-PUMP

Visit our website:
zoellerpumps.com

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

TECHNICAL DATA SHEET

MODEL 508 12-VOLT BACKUP Submersible Sump Pump System



CONTROLLER ALERTS

The AquaNot® Spin 508 is a premium high performance, self-testing battery backup pump system.

PUMP

- 12 volt, highly efficient, non-corrodible pump construction supplied with 9' (2.7 m) leads
- Legs allow free-standing installation
- Quick disconnect discharge
- Aluminum seal pocket and cooling plate
- Integrated check valve

CONTROLLER

The AquaNot® Spin DC Controller keeps the battery charged. The controller has many built-in features such as:

- Monitors the switches, runs the pump
- Performs self-testing diagnostics
- Uses multi-stage charging for optimal battery condition

ALERTS

- Pump cycled
- High water*
- Battery fault
- Switch fault
- Pump fault
- Power outage/restored
- Pump activation

BUTTONS

- Alarm Silence/Reset - press to silence alarms. **Press and hold for three seconds to reset alarms.**
- Test - press to initiate pump test

SWITCHES

- Reliable, vertical float switch for adjustable operation.
- High water reed sensor sold separately. P/N: 10-4830. Reed sensor provides high water signal and redundant pump run.

BATTERY CASE


The included battery case will accommodate maximum battery dimensions of 13" (330 mm) L x 7-1/2" (191 mm) W x 9-1/2" (241 mm) H and fits all group size 27, 29 and 31 batteries. Made from non-corrodible polyethylene. To use multiple batteries, order extra battery case with hookup wire (P/N 10-5184).

FITTINGS

An integrated DC pump discharge check valve, additional thread-in AC pump check valve, tee, and adapter are included.

AQUANOT® SPIN			
LED INDICATOR	SOLID	FLASHING	OFF
System Ready	No Faults (Green)	AC off with no faults (Green)	--
Battery	Charged (Green)	Low Battery (Red)	No AC Power
	Charging (Yellow)		
	Bad Battery (Red)		
DC pump	Pump Ran (Yellow)	Pump Running (Yellow)	--
		Pump Fault (Red)	
Float Status	High Water (Red)*	Float Fault (Red)	--

* If optional high water reed sensor is being used

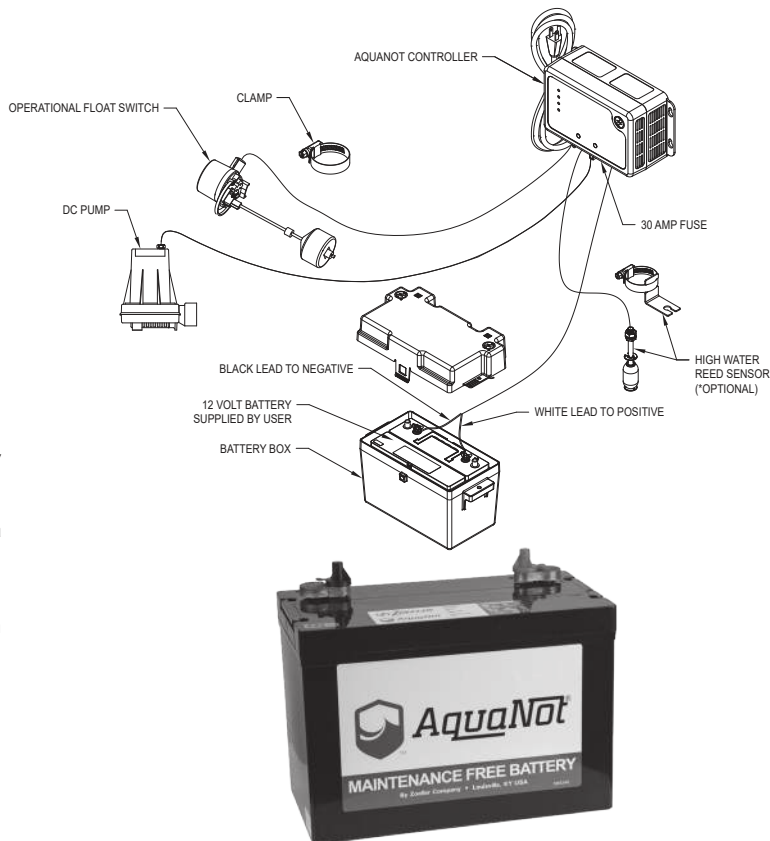

Aquanot® Deep-Cycle Battery (purchase separately)
P/N 10-1450 - AGM (shown)
P/N 10-0761 - Wet

TOTAL DYNAMIC HEAD FLOW PER MINUTE @ 12.1 VOLTS

MODEL		508	
Feet	Meters	Gal.	Liters
5	1.5	39	148
10	3.0	30	114
15	4.6	20	76
20	6.1	6	23
Shut-off Head:		22ft. (6.7m)	

152944


Shipping weight: 17 lbs. (7.7 kg)

NOTE: Not recommended for installation with over 20' (6 m) Total Dynamic Head.

Performance chart based upon actual performance achieved with a 12 volt deep-cycle battery. Some manufacturers publish performance data based upon D.C. pump testing according to marine industry standards which can reflect a performance of 40% - 80% higher than actual battery powered performance.

See FM3166 (Aquanot® Spin 508) Installation Instructions.

Minimum pit size recommendation: 16" (40 cm) diameter X 22" (56 cm) deep. Minimum battery requirements: deep-cycle, size 27, 175 minute reserve capacity.

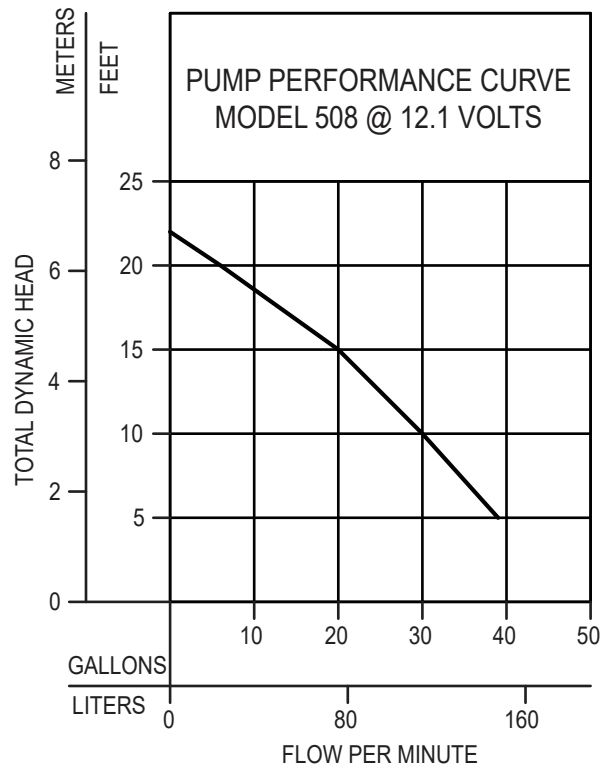

SYSTEMS

Model	System	Warranty
508-0005	Aquanot® Spin 508	3 Years
508-0006	Aquanot® Spin 508/M53 ProPak	3 Years
508-0007	Aquanot® Spin 508/M98 ProPak	3 Years

Both Spin Propak Systems primary pump options come standard with Zoeller LED Plug that allows you to check for power at a quick glance.

WARRANTY

3 years from date of purchase. Battery warranty is 3 years.

BATTERY LIFE

The estimated life of a fully charged (175 minute reserve capacity) battery when the pump is operating continuously is approximately 5.5 hours. However, most backup system pump operation is intermittent. The system will provide protection for extended periods of time dependent upon stop-start requirements and multiple battery arrangements.

PERFORMANCE DATA

Pump performance is based on the use of a fully charged 12 volt, (200-minute reserve capacity) deep-cycle battery with no deficiency and less than two years old.

AQUANOT® BATTERY

- Size 31 "Wet" P/N 10-0761 (58 lbs. [27 kg]) (shipped via truckline only) 180-minute reserve capacity
- Size 27 "AGM" P/N 10-1450 (57 lbs. [26 kg]) 180-minute reserve capacity


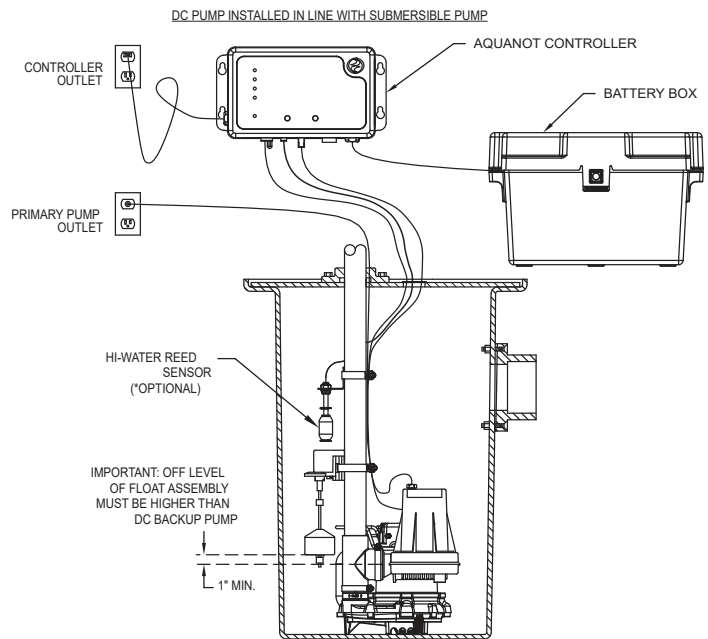


FIG. 1



SK3182



All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).

© Copyright 2025 Zoeller® Co. All rights reserved.

502-778-2731 | 800-928-7867 | 3649 Cane Run Road | Louisville, KY 40211-1961 | zoellerpumps.com