在 Windows 以乙太網路方式安裝及連接 PIXMA PRO-200S 打印機

Installing PIXMA PRO-200S on Windows via LAN connection

以下步驟及畫面僅供參考，實際操作畫面可能因裝置型號、系統或軟件版本而有所不同。

The following steps and screens are for reference only, and the actual operation screens may vary depending on the device model, system, or software version.

有線設定 Wired LAN Setup

1. 確保在開始有線連接設定之前，印表機已開啟。
   如果電源開啟，電源指示燈將亮起。
   Make sure printer is turned on before starting wired connection setup.
   If the power is on, the **ON** lamp will be lit.

2. 需要乙太網路電纜線(另行出售)。
   You will need an Ethernet cable (sold separately).

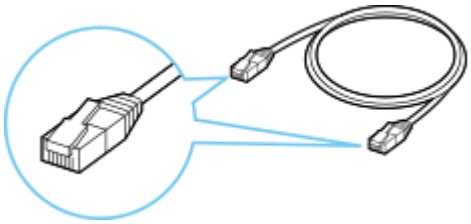

3. 取下位於印表機後部左側連接埠的蓋。
   Remove the Cap from the port located on the left side at the back of the printer.

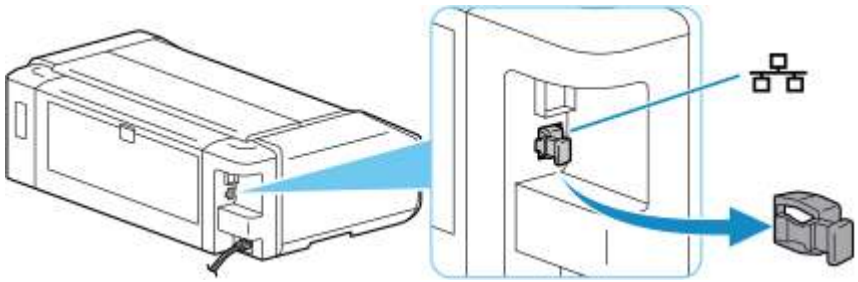

4. 使用乙太網路電纜線連接印表機和網路裝置(路由器等)。
請勿連接到任何其他連接埠。
Connect the printer and a network device (router, etc.) with an Ethernet cable.
Do not connect to any other port.

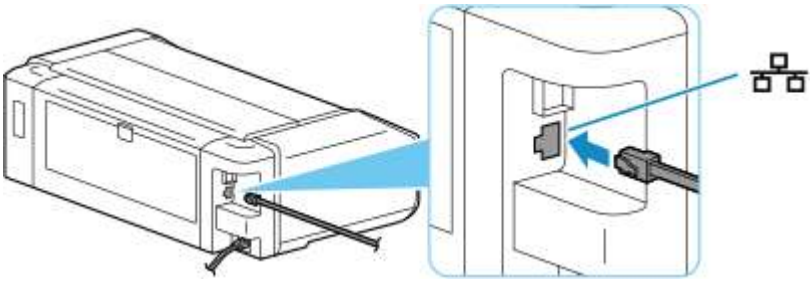

5. 在印表機按**主頁**按鈕。
Press the **HOME** button on the printer.

6. 使用上或下（▼▲）按鈕選擇 **LAN 設定**，然後按 **OK** 按鈕。
Use the up or down (▼▲) button to select **LAN settings** and press the **OK** button.

7. 選擇**有線 LAN** 並按 **OK** 按鈕。

Select **Wired LAN** and press the **OK** button.

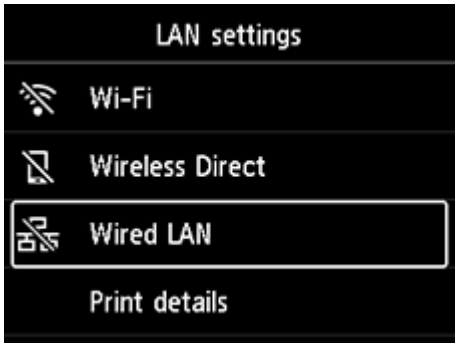

8. 選擇**設定**並按 **OK** 按鈕。

Select **Settings** and press the **OK** button.

9. 選擇**啟用/禁用有線 LAN** 並按 **OK** 按鈕。

Select **Enable/disable Wired LAN** and press the **OK** button.

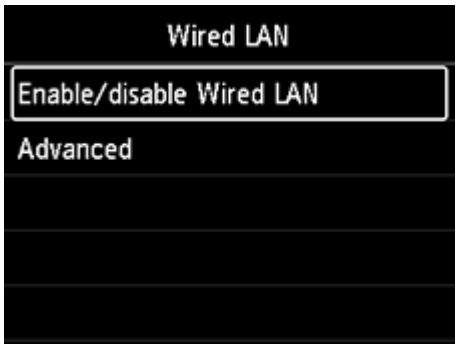

10. 選擇**啟用**並按 **OK** 按鈕。

Select **Enable** and press the **OK** button.

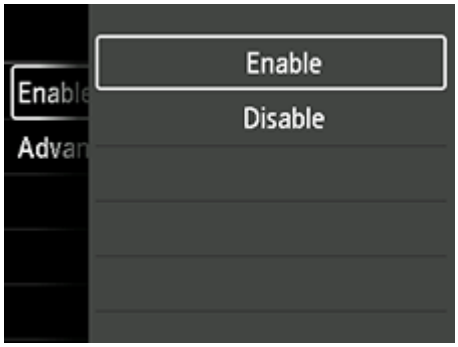

如果顯示以下螢幕

If the following screen appears

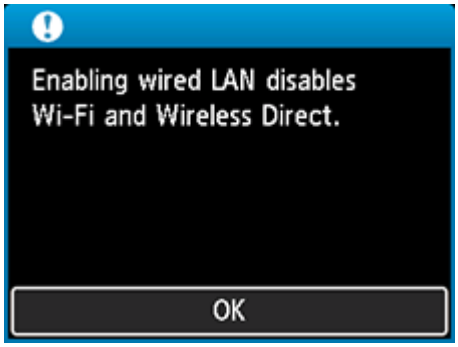

按 OK 按鈕，然後繼續執行步驟 11。

Press the OK button, and then proceed to step 11.

11. 按**主頁**按鈕。

Press the **HOME** button.

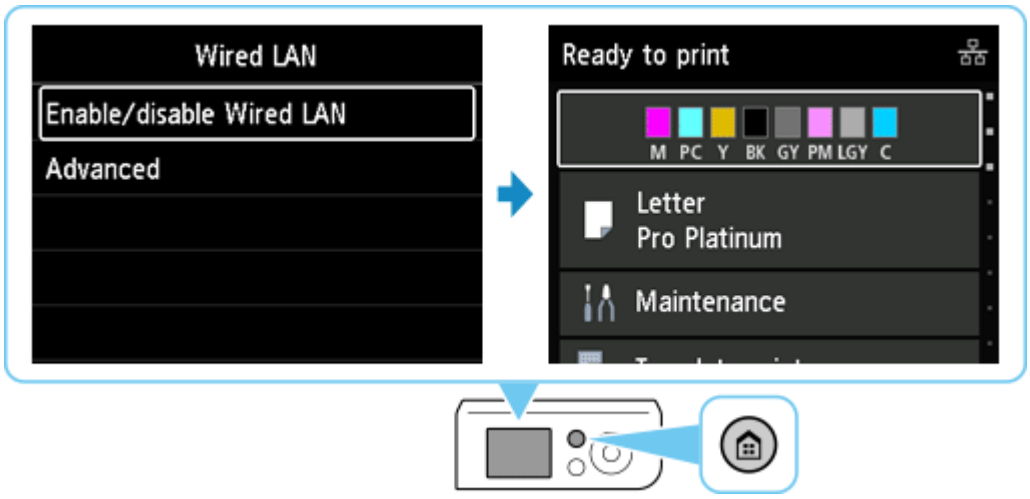

網路連接設定完成。

連接完成後，有線連線標誌 顯示在螢幕的右上方。

The network connection setup is now complete.

Once the connection is complete, the wired LAN icon appears at the upper right of the screen.

下載及安裝步驟

Driver download and Installation procedure

12. 點擊以下連結下載有關之驅動程式：
    Click the link below to download printer driver:
    https://hk.canon/en/support/pixma%20pro-200s/model

13. 選擇並下載以下檔案
    Choose and download the file below
    PRO-200S Printer Driver Ver.x.xx (Windows)

14. 按網頁內的〔Download〕按鈕，下載完成後開啟該檔案安裝
    Click [Download] button in the webpage, and then execute the file after download was completed

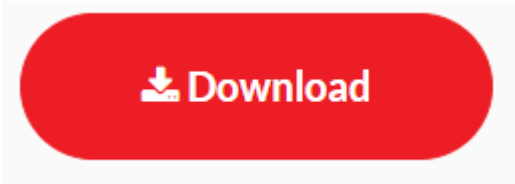

15. 打開安裝程式後按〔下一步〕
    Click [Next] after open the installation program

16. 在居住地選擇〔亞洲〕，然後按〔下一步〕

Select [Asia] for place of residence, then click [Next]

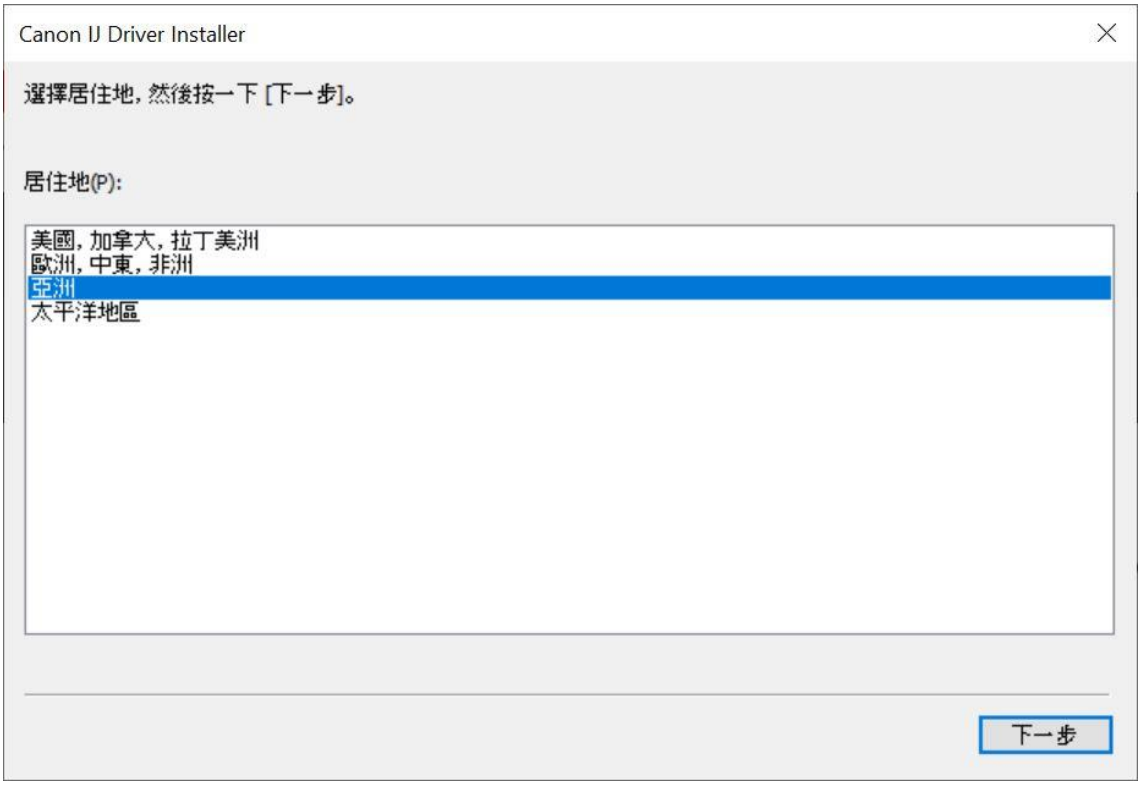

17. 按〔是〕同意許可協定

Click [Yes] to accept the license agreement

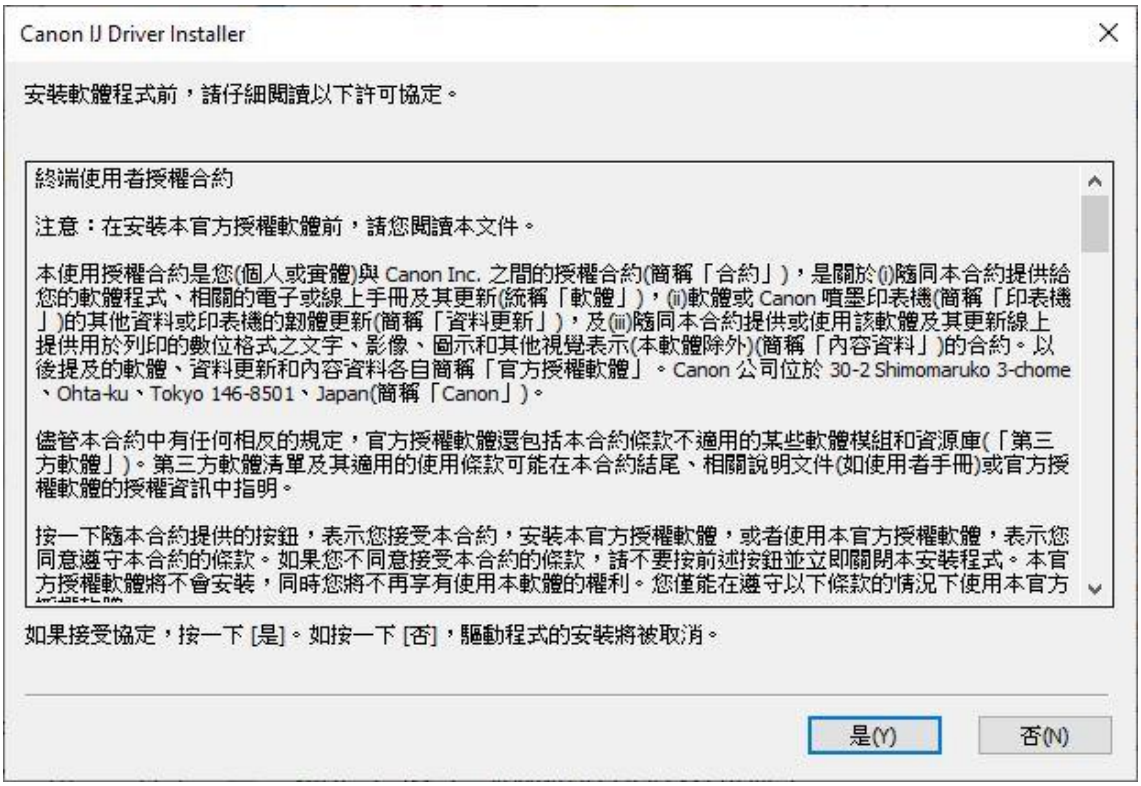

18. 選擇連接方法為 LAN 的打印機，按〔 下一步〕

Select the printer with connection method as LAN, click [Next]

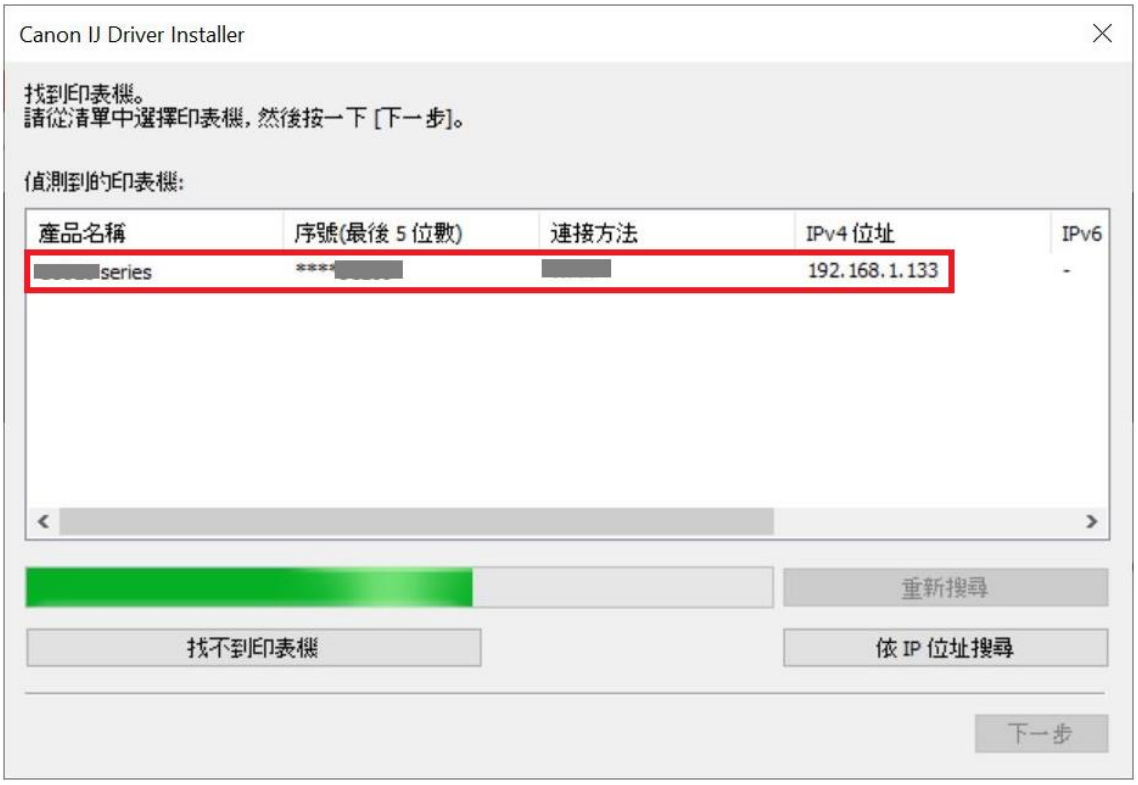

19. 正在安裝印表機驅動程式，請稍候

Installing the driver, please wait

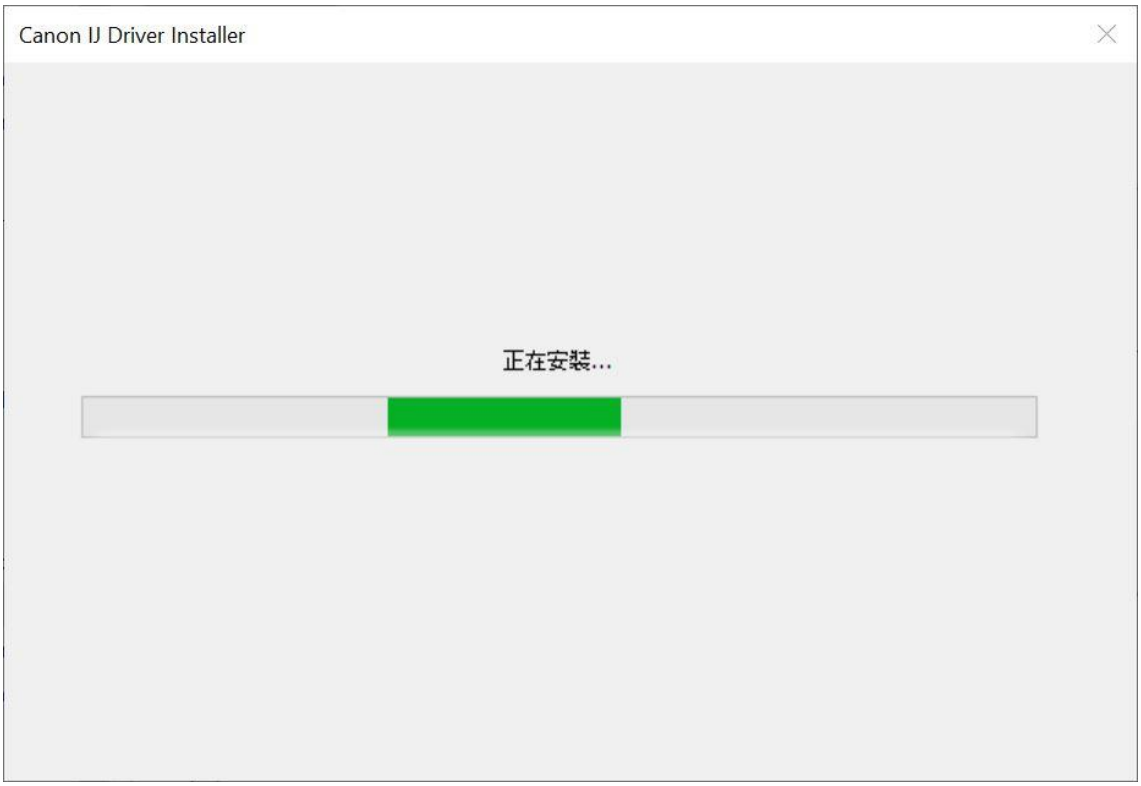

20. 安裝完成，按〔結束〕

Driver installation was completed, click [Finish]

-完-

-End-