


EN

SPECIFICATIONS:

Number of keys: 100(hot-swappable Mechanical Switch)
Numbers of Multifunction Keys: 15
Materials: ABS Body , PBT+PC Keycaps
Interface: Type-C
Mode: Wired/Bluetooth/2.4G
Bluetooth Name: Flow100-L@Lofree
Dimensions: 374.5X138X23.5mm

Diagram:

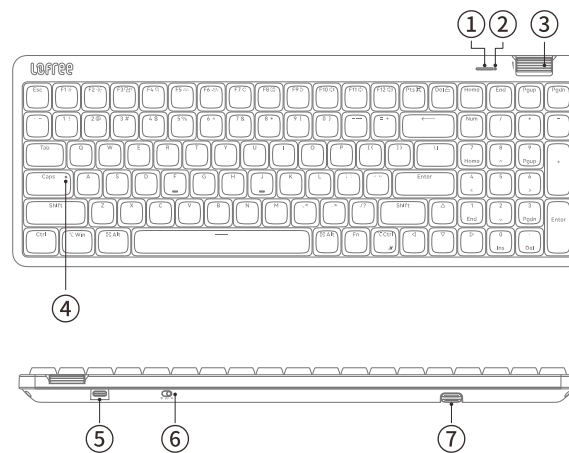

1 Battery Indicator
Charging:Indicator on breathing white
Charged:Indicator always on white
Battery<20%, Indicator on breathing red
Battery<5%, Indicator flashing till off

2 Numeric keypad indicator light
scroll up is large,scroll down is small
Press to switch between mute and non-mute

4 Caps Lock Indicator(White)/Status Indicator(Blue)
Caps Lock Indicator(White)
Indicator white light enabled: Caps lock on
Indicator white light disabled: Caps lock off
Bluetooth Pairing Indicator(Blue)
During Bluetooth pairing, Indicator blinks slowly for 1 min,
after success,Indicator keeps on for 3s
During device switching, Indicator flashes for 3s,
after success, Indicator keeps on for 3s
During Bluetooth reconnection, the indicator keeps blinking
After reconnection, the indicator keeps on for 3 seconds,
and then recovers to the previous state

5 Type-C Interface
Wired/Charging port
6 Mode Switch
X OFF/ N Wired Mode/ W Wireless Mode
7 2.4G Receiver

Detailed Operation


Wired Connection:

1 Toggle the mode switch to N
2 Connect the keyboard to the device with attached Type C cable to complete the wired connection mode


Bluetooth Connection:

1 Toggle the mode switch to W
2 Long Press Fn+1/Fn+2 /Fn+3 until indicator blinks slowly on Blue

3 Find and pair "Flow100-L@Lofree" on your list of paired devices

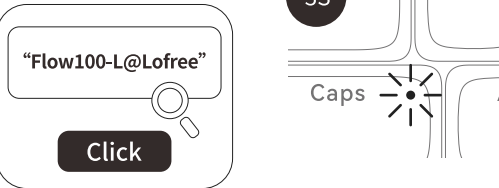

5 Fn+1/Fn+2/Fn+3= Switch Bluetooth Device


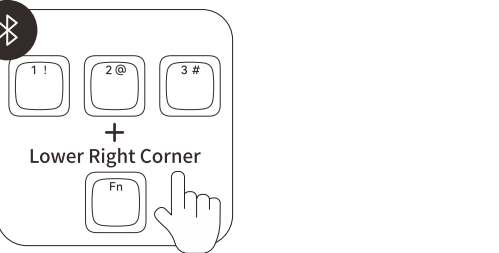


4 Status Indicator: Indicator keeps on for 3s and turns off



2.4G Wireless Mode:


1 Take out the 2.4G receiver from the bottom of the keyboard
2 Insert the 2.4G receiver into the USB port of the device, and the corresponding 2.4G light will always be on after successful connection
3 Toggle the mode switch to W
4 Long press Fn+4 to start the 2.4G connection mode
5 The corresponding 2.4G light flashes slowly, After successful connection, the blue light will stay on for 3 seconds and then go off. Restore the current corresponding state

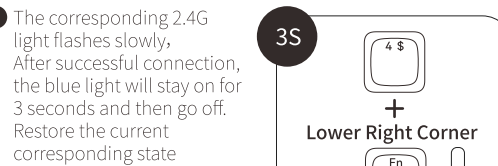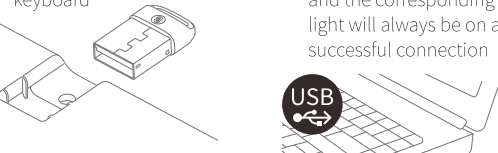

Note:
1.No pairing is required for the second use of the same device after successful pairing for the first time.
2.MAC/IOS system devices do not support multimedia functions under 2.4G&USB connection


Use of Ambient Light:

1 Fn + ←/→ : Steady/Breathe/Off



System Switch

Fn+N is to trigger the corresponding system function key of windows/Android
Fn+M is to trigger the corresponding system function key of Mac/IOS

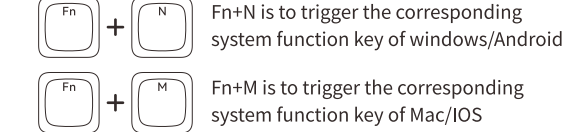

Multifunction Keys

Fn + F1.....Del = Multimedia Key

Table with columns: Function Sign, Mac, Windows. Lists keys like FN+F1 (Screen BR -), FN+F2 (Screen BR +), FN+F3 (Multi-Screen), etc.

NAME AND CONTENT OF HAZARDOUS SUBSTANCES IN PRODUCT:

Table with columns: Harmful Elements, Lead (Pb), Mercury (Hg), Cadmium (Cd), Hexavalent Chromium (Cr-VI), Polybrominated Biphenyls (PBB), Polybrominated Diphenyl Ethers (PBDE). Rows include Plastic Components, Circuit Board Assembly, Silicone Components, Spare Partss.

This table is prepared in accordance with the provisions of SJ/T 11364.
The classification and marking of this product was performed in accordance with the EU directive 2011/65/EU and the revised directive 2015/863/EU.
O:Indicates that the said hazardous substance contained in all the homogeneous materials for this component is below the limit requirement in GB/T 26572.
X:Indicates that this hazardous substance contained in at least one of the homogeneous materials used for this part is above the limit requirement in GB/T 26572.

ENVIRONMENTAL PROTECTION INSTRUCTIONS:

The hazardous substances contained in the electronic parts of this product will not leak or change under normal use conditions for a period of ten years. During the same period, the electronic components of this product will not cause serious environmental pollution or serious damage to human health or property...

Warning:

- If the battery is not replaced properly, there may be leakage or explosion and personal injury hazards.
Do not use the battery when there is leakage, discoloration, deformation, or any other abnormality.
Do not leave the battery in a discharged or unused state for a long time.
Do not short-circuit the product
Battery life varies with usage. Used batteries should be disposed of in accordance with local laws or thrown away in trash cans for recycling electronic devices.
If any liquid accidentally enters the product, please immediately disconnect the power supply and remove the product. Continue to use the product may cause fire or electric shock. Please contact the agent or the nearest customer service center for inspection and maintenance.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-- Reorient or relocate the receiving antenna.
-- Increase the separation between the equipment and receiver.
-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1)This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.