



For FAQs and more information, please visit:

www.eufylife.com



Cleaning

Owner's Manual

RoboVac 11S (T2108)

English 01

العربية 25

Table of Contents

02 Important Safety Instructions

04 About Your RoboVac

What's in the Box

RoboVac Anatomy

LED Indication

09 Using Your RoboVac

Important Tips Before Use

Preparation

Charge Your RoboVac

Start / Stop Cleaning

Select a Cleaning Mode

Set Time and Scheduled Cleaning

17 Cleaning and Maintenance

Clean the Dust Collector and Filters

Clean the Rolling Brush

Clean the Side Brushes

Replace the Side Brushes

Clean the Sensors and Charging Pins

Clean the Swivel Wheel

22 Troubleshooting

24 Specifications

24 Customer Service

Thank you for purchasing RoboVac 11S. Read all instructions before using this product, and keep it properly for future reference.

Important Safety Instructions

To reduce the risk of injury or damage, read these safety instructions carefully and keep them at hand when setting up, using, and maintaining this device.



WARNING SYMBOLS USED

This is the safety alert symbol. This symbol alerts you to potential hazards that could result in property damage and/or serious bodily harm or death.

- This device can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of this device in a safe way and understand the hazards involved.
- Children should be supervised to ensure they do not play with this device.
- Cleaning and maintenance shall not be performed by children without adult supervision.
- This device is only to be used with the power supply unit provided.
- For the purposes of recharging the battery, only use the detachable power supply unit provided with this device.
- The battery must be removed from this device before this device is disposed of. To remove the battery from this device, first remove the screws on the bottom, then remove the main PCB and unscrew the battery cover using a screwdriver. Remove the battery by disconnecting the quick connector.
- The used battery should be placed in a sealed plastic bag and disposed of safely according to local environmental regulations.
- The external flexible cable or cord of the power supply unit cannot be replaced; if the cord is damaged, the power supply unit shall be disposed of.
- This device is for indoor use only.
- This device is not a toy. Do not sit or stand on this device. Small children and pets should be supervised when this device is operating.
- Store and operate this device in room temperature environments only.

- Clean with a cloth dampened with water only.
- Do not use this device to pick up anything that is burning or smoking.
- Do not use this device to pick up spills of bleach, paint, chemicals, or anything wet.
- Before using this device, pick up objects like clothing and loose paper. Lift up cords for blinds or curtains, and move power cords and fragile objects out of the way. If this device passes over a power cord and drags it, an object could be pulled off a table or shelf.
- If the room to be cleaned has a balcony, a physical barrier should be used to prevent access to the balcony and to ensure safe operation.
- Do not place anything on top of this device.
- Be aware that this device moves around on its own. Take care when walking in the area where this device is operating to avoid stepping on it.
- Do not operate this device in areas with exposed electrical outlets on the floor.
- Do not expose the electronics of this device, its battery, or the integrated Charging Base. There are no user-serviceable parts inside.
- Do not use this device on an unfinished, unsealed, waxed or rough floor. It may result in damage to the floor and this device. Use only on hard floor surfaces or low-pile carpet.
- This device has been designed to be used on floors without scratching them. We still recommend that you test this device on a small area of the room to be cleaned to ensure no scratches are made before cleaning the whole room.


Notice




This symbol on the device or its packaging indicates: Do not dispose of electrical appliances as unsorted municipal waste; use separate collection facilities. Contact your local authority for information regarding the collection systems available. If electrical appliances are disposed of in landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain, damaging your health and well-being. When replacing old appliances with new ones, the retailer is legally obliged to take back your old appliance for disposal at least free of charge.

About Your RoboVac

What's in the Box




RoboVac 11S



Charging Base




Remote Control
(AAA Battery x2)




Power Adapter




Cleaning Tool




Side Brushes (x4)



Additional
High-Performance
Filter




Additional
Foam Filter




Owner's Manual &
Other Documents

RoboVac Anatomy


Top & Side

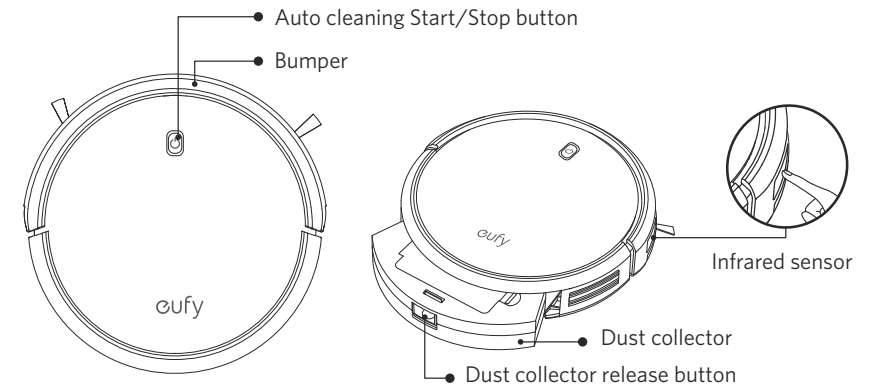


Bottom

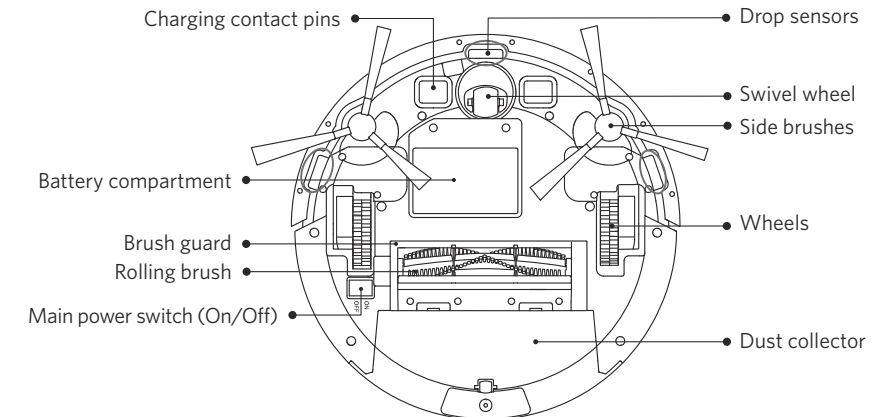


Dust Collector

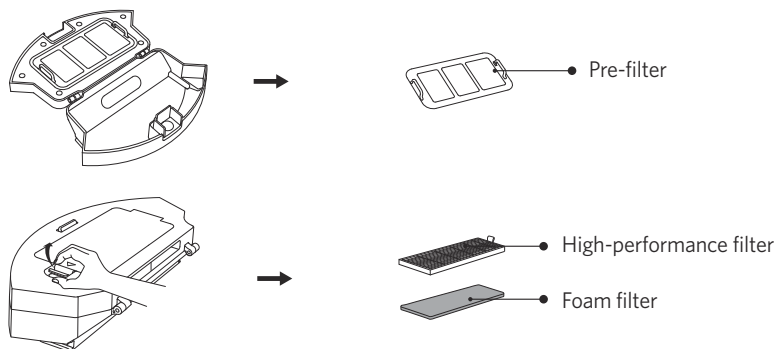


Suction Inlet

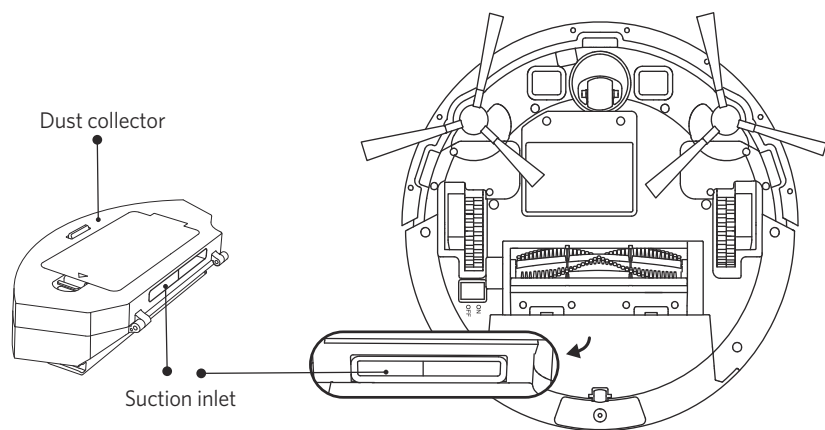


Charging Base

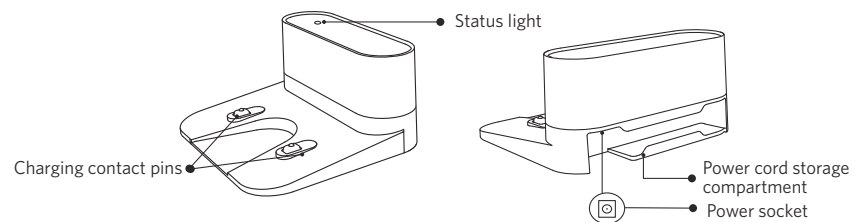


Remote Control

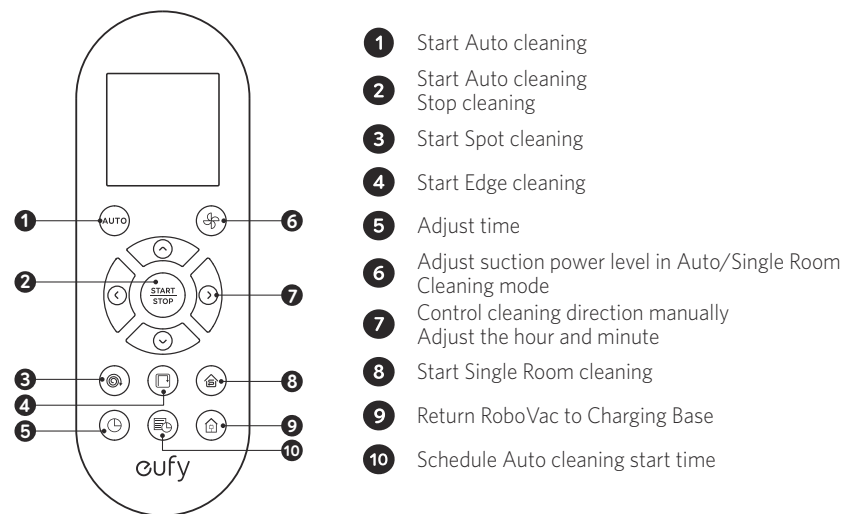

Remote Control Display

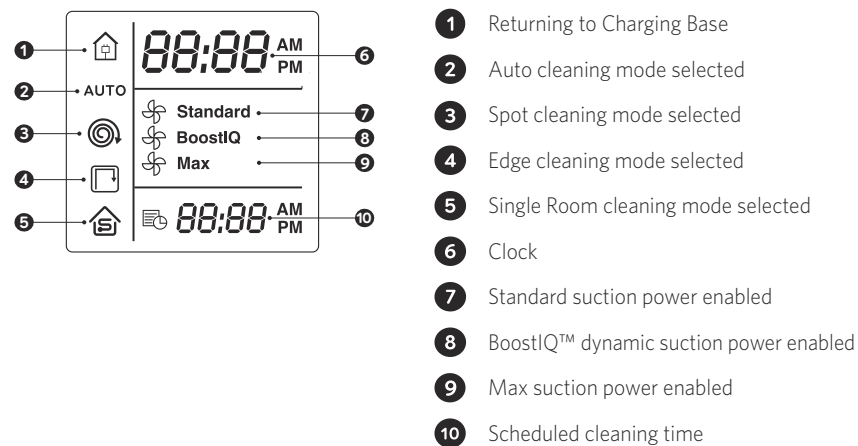

 Install 2 AAA batteries before using the remote control for the first time. Make sure the positive and negative ends are facing the correct polarity direction as marked in the battery compartment.


LED Indication

You can see the status of RoboVac from the LED indicator.

🔌 (Status Light)	Status
Breathing orange	Charging
Solid blue	Standby / Cleaning / Fully charged
Solid orange	Low power and returning to Charging Base
Off	<ul style="list-style-type: none"> RoboVac is off. To conserve power, the light automatically turns off when RoboVac is not docked to the Charging Base and has been inactive for 1 minute.
Flashing / Solid red + Beeping	RoboVac has an error. Refer to the " Troubleshooting>Error Tone " section in this manual for solutions.

Using Your RoboVac

Important Tips Before Use

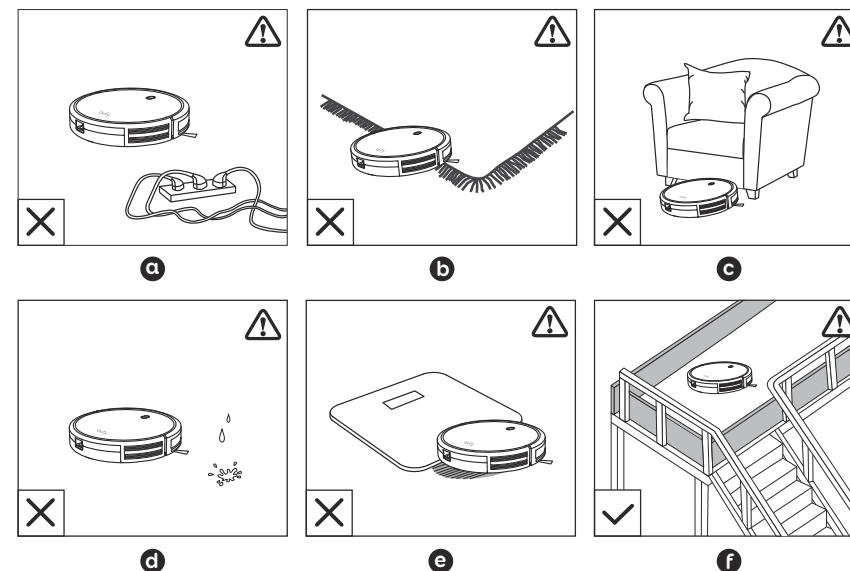


- a** Remove power cords and small objects from the floor that may entangle RoboVac.
- b** Fold tasseled edges of area rugs underneath to prevent tangling RoboVac. Avoid cleaning very dark-colored high-pile rugs or rugs thicker than 1.02 in/26 mm as they may cause RoboVac to malfunction.
- c** Keep RoboVac away from spaces lower than 2.87 in/73 mm to prevent RoboVac from getting stuck. If necessary, place a physical barrier to block off the problem areas.
- d** Keep RoboVac away from wet areas.
- e** RoboVac may climb on top of objects less than 0.63 in/16 mm in height. Remove these objects if possible.
- f** Anti-drop sensors prevent RoboVac from tumbling down stairs and steep drops. They may work less effectively if dirty or used on reflective/very dark-colored floors. It is recommended to place physical barriers to block off areas where RoboVac may fall.




Place physical barriers in front of fireplaces and areas that may cause damage to RoboVac if entered.


Preparation

- 1 Install the side brushes before use.




- 2 Turn on the main power switch on the bottom of RoboVac.

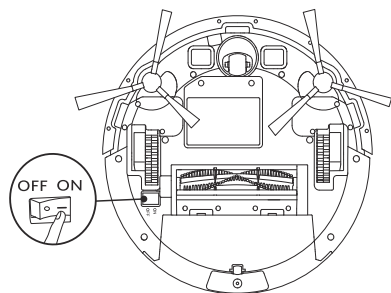


 Remove the sticker next to the power switch, and the foam blocks beside the bumper before use.


- 3 Place the Charging Base on a hard, level surface and against a wall.

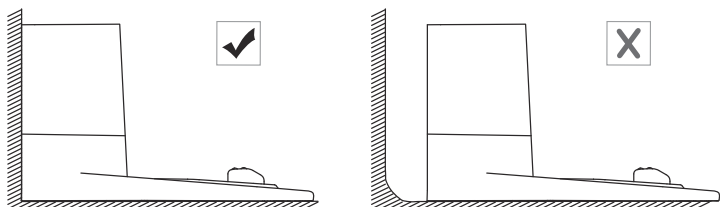


- 4 Remove objects within 3 ft/1 m of the left and right side and within 6 ft/2 m of the front of the charging base.

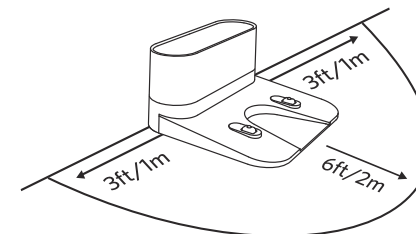

- 5 Connect the round connector of the adapter into the power socket on the Charging Base and the other end into a wall outlet.
 - When the Charging Base connects to AC power, the LED indicator on the Charging Base is SOLID WHITE.

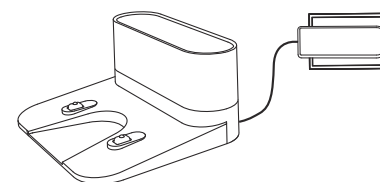



 - Install the Charging Base in a location that RoboVac can easily access. It is recommended to place the Charging Base against a wall, and on a hard-level surface rather than on rugs or carpets.
- Always keep the Charging Base plugged in, otherwise RoboVac will not automatically return to it.


Charge Your RoboVac

- RoboVac has a pre-installed rechargeable battery that has to be fully charged before use.
- RoboVac returns to the Charging Base at the end of a cleaning cycle or when its battery is running low.

Method 1: Attach RoboVac to the Charging Base by aligning its charging pins with the charging pins on the base.

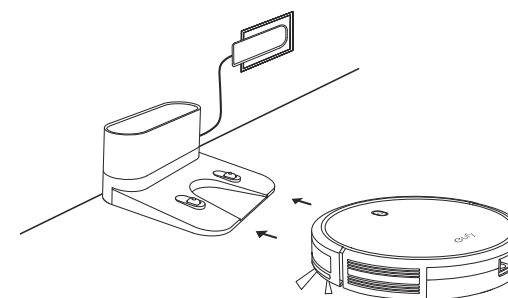

Method 2: Press  on the remote control to return RoboVac to the Charging Base.







Turn off the main power switch if RoboVac will not be used for a long period of time. To preserve the battery's lifespan, recharge at least once every 6 months.



Start / Stop Cleaning




Make sure the main power switch on the bottom of RoboVac is turned on before use.

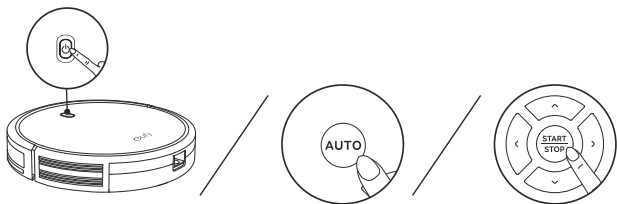1. Press  on RoboVac or  /  on the remote control to start cleaning in Auto Mode.



2. Press  on RoboVac or  on the remote control to stop cleaning.

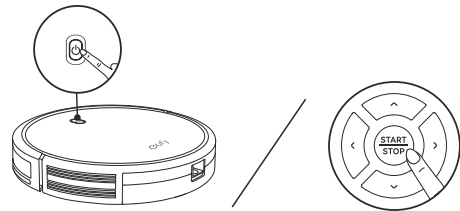


Select a Cleaning Mode

1. Auto cleaning

RoboVac optimizes its cleaning path by selecting different cleaning modes automatically until cleaning is complete. This is the most commonly used cleaning mode.

Press  on RoboVac or  /  on the remote control to start cleaning in Auto Mode.

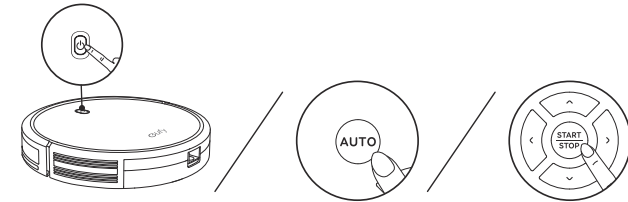




- RoboVac will return to the Charging Base automatically when the battery level becomes low or when RoboVac finishes cleaning.
- By default, RoboVac starts in Auto cleaning mode when it is turned on.

BoostIQ™ Feature

When the BoostIQ™ feature is enabled, RoboVac will automatically increase the suction power if it detects stronger power is needed to ensure the best clean. BoostIQ™ is ideal for cleaning thicker carpets and hard-to-sweep messes, which will reduce the total cleaning time, but increase the noise level. If the vacuuming noise caused by BoostIQ™ disturbs you, you can disable this feature. This feature only works in Auto and Single Room cleaning modes.

In Auto or Single Room cleaning mode, press  on the remote control repeatedly to adjust the suction power level.

- The corresponding icon is displayed on the remote control.

Icon	Suction Power Level
 Standard	Standard power
 BoostIQ	Automatically switches between Standard and Enhanced power (default)
 Max	Maximum power




When RoboVac starts cleaning in Auto or Single Room mode the next time, it will clean according to the suction power level you previously selected.

2. Spot cleaning


RoboVac intensively cleans a specific area in a spiral pattern, useful if there is a concentrated area of dust or debris. In Spot mode, RoboVac will stop cleaning after 2 minutes.


Press  on the remote control to start cleaning in Spot mode.

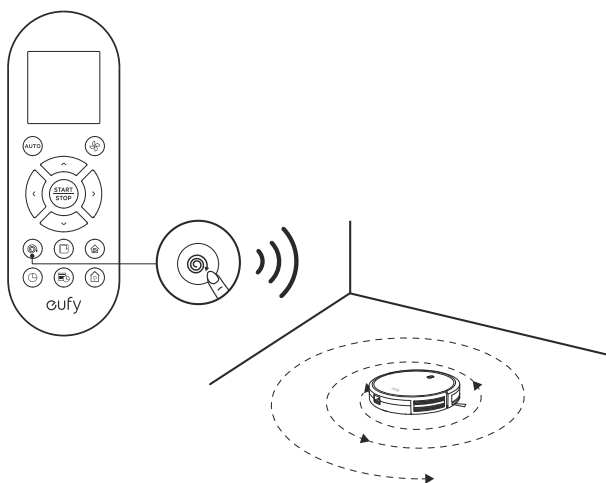

3. Edge cleaning

RoboVac reduces its speed when it detects a wall and then follows the wall to ensure the edge is cleaned thoroughly. In Edge mode, RoboVac will clean for 20 minutes and return to the Charging Base.


Press  on the remote control to start cleaning in Edge mode.

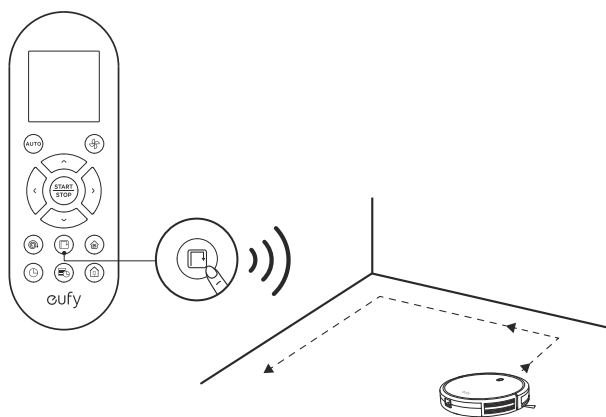

4. Single Room cleaning


RoboVac intensively cleans one single room and stops after 30 minutes. Select this mode only when one specific room needs to be cleaned. Make sure to confine RoboVac to the room by closing the door.

Press  on the remote control to start cleaning in Single Room Mode.

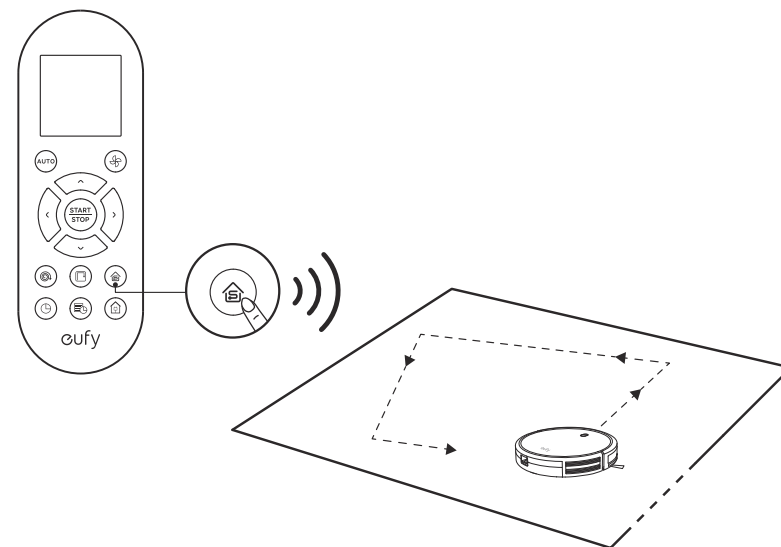


5. Manual cleaning





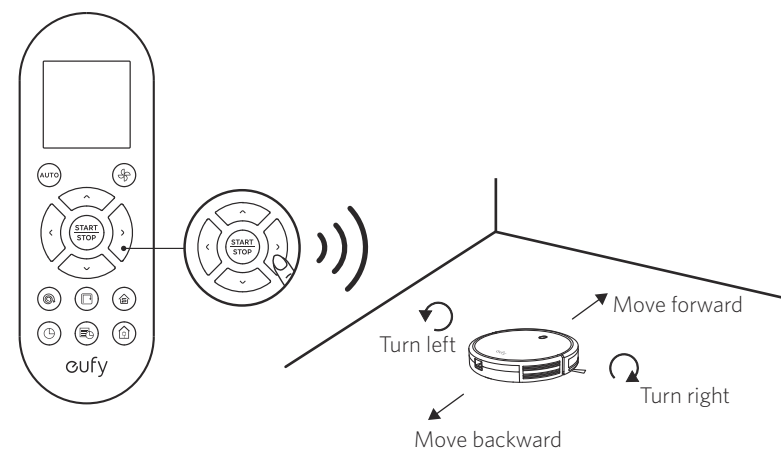
You can direct RoboVac to clean a particular area by using the directional buttons on the remote control.






Set Time and Scheduled Cleaning

Set Time



 Make sure the time is set correctly to your local time before setting a scheduled cleaning.

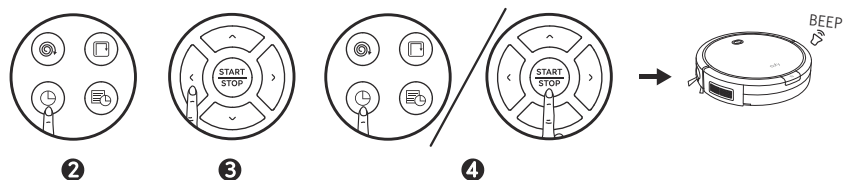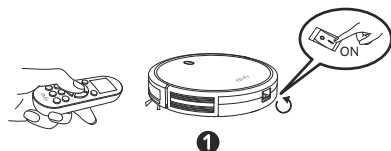- 1 Make sure the main power switch on the bottom of RoboVac is turned on.
- 2 Press  on the remote control. The time will blink on the display.
- 3 Press   to set the "hour" and "minute".
Note: Make sure AM/PM is set correctly.
- 4 Press  or  to save the setting. RoboVac will **BEEP ONCE** to indicate the time has been set.





 To ensure the time is set successfully, make sure RoboVac is turned on. You will hear a beep when the time has been set.

Set a Scheduled Cleaning



You can schedule RoboVac to start cleaning at a specified time. To cancel a previously scheduled cleaning, press and hold  for 3 seconds until RoboVac beeps twice and  disappears.



Note: Before setting a scheduled cleaning, make sure the time has been set correctly to your local time; refer to the previous section "Set Time" for how to set the time.


- 1 Make sure the main power switch on the bottom of RoboVac is turned on.
- 2 Press  on the remote control.  will blink on the display.

- 3 Press   to set the "hour" and "minute".

Note: Make sure AM/PM is set correctly.

- 4 Press  or  to save the setting. RoboVac will **BEEP ONCE** to indicate the schedule has been set.

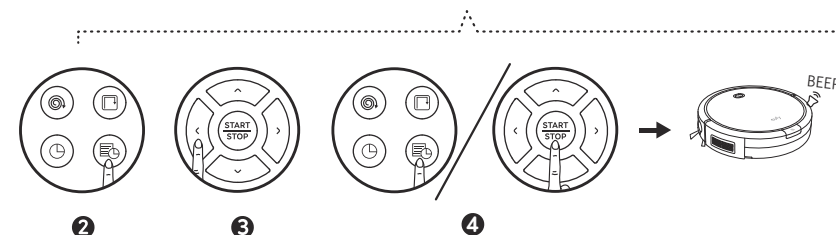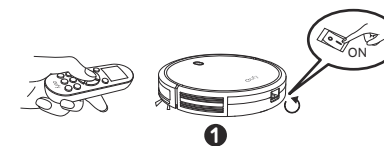

 To ensure the schedule is set successfully, make sure RoboVac is turned on. You will hear a beep when the schedule has been set.

Cleaning and Maintenance


For optimal performance, follow the instructions below to clean and maintain RoboVac regularly. The cleaning/replacement frequency will depend on your usage habits of RoboVac.

Recommended cleaning/replacement frequency:


RoboVac Part	Cleaning Frequency	Replacement Frequency
Dust Collector	After each use	-
Filters	Once every week	Every 2 months
Rolling Brush	Once every week	Every 6-12 months
Side Brushes	Once every month	Every 3-6 months (or when visibly worn)
Brush Guard	Once every month	Every 3-6 months (or when the silicone rubber strip on the brush guard becomes visibly worn)
Sensors	Once every month	-
Charging Pins	Once every month	-
Swivel Wheel	Once every month	-

Clean the Dust Collector and Filters


- 1 Press the dust collector release button to pull the dust collector out.
- 2 Open and empty the dust collector.

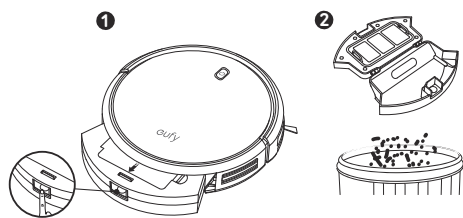


- 3 Remove the pre-filter by pulling the hooks as shown.

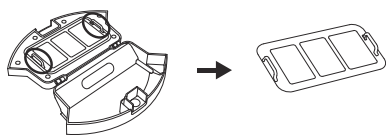


- 4 Take out the foam filter and high-performance filter.

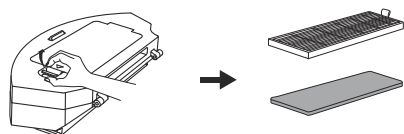


- 5 Clean the dust collector and filters with a vacuum cleaner or a cleaning brush.

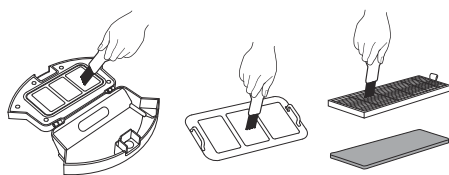

- 6 Put the filters and pre-filter back together in the dust collector.

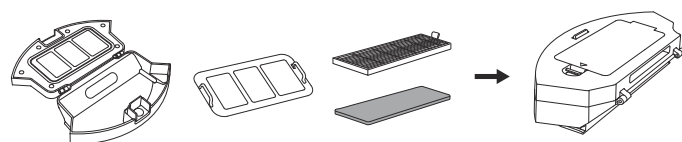


- 7 Push the dust collector back into the main unit.



You can wash the dust collector, pre-filter and foam filter with water. Be sure to air-dry them thoroughly before reassembling. Do not wash the high-performance filter with water, as it may damage the filter and reduce the suction power.

Clean the Rolling Brush


- 1 Pull on the release tabs to unlock the brush guard as shown.
- 2 Lift the rolling brush to remove.
- 3 Clean the rolling brush with the provided cleaning tool or a vacuum cleaner.
- 4 Reinstall the rolling brush by inserting the fixed protruding end first and then clicking into place.
- 5 Press down to snap the brush guard into place.

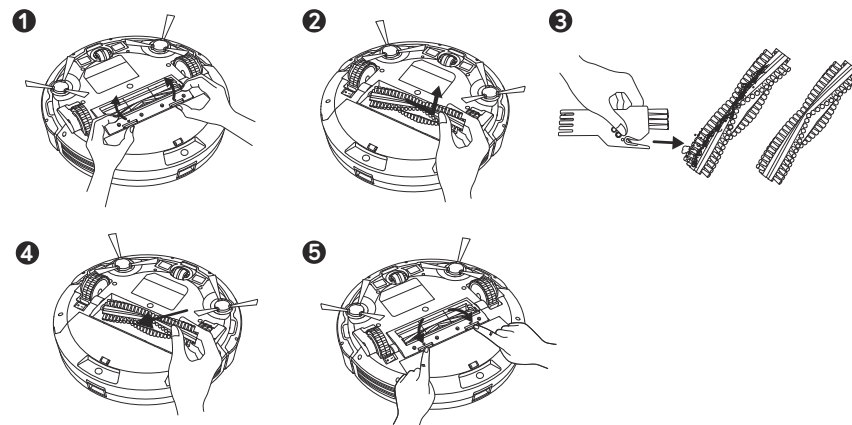


Clean the Side Brushes

Foreign substances, such as hair, can easily get tangled in the side brushes, and dirt may adhere to them. Be sure to clean them regularly.

- 1 Remove the side brushes.
- 2 Carefully unwind and pull off any hair or string that is wrapped between the main unit and the side brushes.
- 3 Use a cloth dampened with warm water to remove dust from the brushes or to gently reshape them.

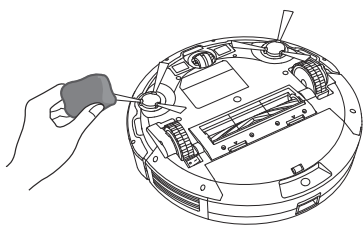


 Only use the side brushes when they are completely dry.

Replace the Side Brushes

The side brushes may become bent or damaged after being used for a period of time. Follow the instructions below to replace them.


Pull off the old side brushes and snap the new ones into place.

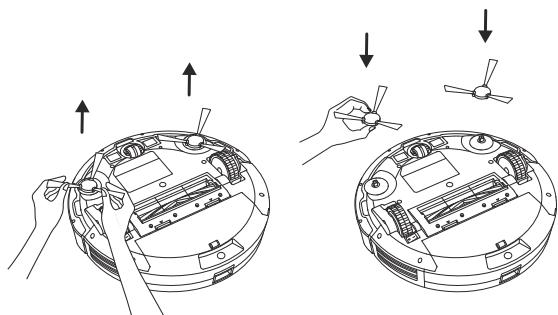

Clean the Sensors and Charging Pins


To maintain the best performance, clean the drop sensors and charging pins regularly.

- Dust off the drop sensors and charging contact pins using a cloth or cleaning brush.

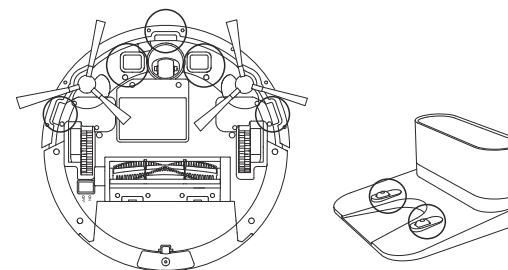


Clean the Swivel Wheel


Hair or dust particles can easily get entangled in the swivel wheel. Be sure to clean the swivel wheel periodically and as needed.



- 1 Pull out the swivel wheel.



- 2 Clean any hair or debris wrapped around the wheel or entangled inside the wheel cavity.
- 3 Reinstall the wheel and push in until it clicks into place.

 - You can clean the swivel wheel with water.
- Use the swivel wheel only when it is completely dry.

Troubleshooting

Frequently asked questions

Problems	Solutions
RoboVac cannot be activated.	<ul style="list-style-type: none"> Make sure the main power switch is in the ON position. Make sure the battery is fully charged. Replace the batteries (2 AAA) in the remote control. Make sure the remote control is within range (16 ft/5 m) of RoboVac. If you still have trouble, turn off the main power switch and then turn it back on.
The remote control does not work.	<ul style="list-style-type: none"> Replace the batteries in the remote control. Make sure RoboVac is turned on and fully charged.
RoboVac stops working suddenly.	<ul style="list-style-type: none"> Check if RoboVac is trapped or stuck on an obstacle. Check if the battery level is too low. If you still have trouble, turn off the main power switch, wait for 2 seconds, and then turn it back on.
You cannot schedule cleanings.	<ul style="list-style-type: none"> Make sure the main power switch on the bottom of RoboVac is turned on. Make sure the time, time of day (AM/PM), and the scheduled time have been set correctly. Check if RoboVac's power is too low to start cleaning.
Suction power is weak.	<ul style="list-style-type: none"> Check if any obstructions are blocking the suction inlet. Empty the dust collector. Clean the filters with a vacuum cleaner or a cleaning brush. Check if the filters are wet due to water or other liquid on the floor. Air-dry the filters completely before use.
RoboVac cannot be charged.	<ul style="list-style-type: none"> Check if the indicator on the Charging Base lights up. If not, contact the eufy service center to repair or replace the Charging Base. Dust off the charging contact pins with a dry cloth. Check if you can hear a beep when RoboVac is docked onto the Charging Base. If not, contact the eufy service center to repair or replace the Charging Base.
RoboVac cannot return to the Charging Base.	<ul style="list-style-type: none"> Remove objects within 3 ft/1 m to the left and right side and within 6 ft/2 m of the front of the Charging Base. When RoboVac is in the vicinity of the Charging Base, it will return more quickly. However, if the Charging Base is located far away, RoboVac will need more time to return. Please be patient as it works its way back. Clean the charging contact pins.

Problems	Solutions
The rolling brush does not rotate.	<ul style="list-style-type: none"> Clean the rolling brush. Check if the rolling brush and brush guard have been installed properly.
RoboVac's movements or travel path are abnormal.	<ul style="list-style-type: none"> Clean the sensors carefully with a dry cloth. Restart RoboVac by turning the power switch off and on.

Error Tones

When RoboVac is in trouble, it will emit a series of short or long beeps and the red indicator on RoboVac will be solid or flashing.



Flashing red indicator light




Error Tone	Cause	Solution
One beep	<ul style="list-style-type: none"> RoboVac is stuck and one of the wheels is not making contact with the floor (hanging in mid-air). RoboVac may be in an extremely large room and the bumper is not registering obstacles. 	Restart cleaning in a new location.
Two beeps	RoboVac's bumper is stuck.	Tap RoboVac's bumper several times to dislodge any debris that may be trapped underneath.
Three beeps	<ul style="list-style-type: none"> RoboVac's drop sensors are dirty. RoboVac is stuck on the ledge of a staircase and cannot reverse. 	<ul style="list-style-type: none"> Clean the drop sensors gently with a dry cloth. Place RoboVac in a new location. Use a physical barrier to block off the problem area.
Four beeps	RoboVac's power level is too low.	Manually charge RoboVac for at least 5 hours.

Solid red indicator light

Error Tone	Cause	Solution
One beep	RoboVac's left/right wheel is stuck.	Turn off RoboVac and remove any hair or debris from the left/right wheel.
Two beeps	RoboVac's side brush is stuck.	Turn off RoboVac and remove any hair or debris from the side brush.
Three beeps	RoboVac's suction fan is stuck.	<ul style="list-style-type: none"> Turn off RoboVac, then remove and empty the dust collector. Make sure the suction inlet is not blocked by any hair or debris.
Four beeps	RoboVac's rolling brush is stuck.	Turn off RoboVac and remove any hair or debris from the rolling brush.

Specifications

	Product Model	T2108
	Input	19 V  0.6 A
	Battery Voltage	DC 14.4 V
	Power Consumption	25 W
	Battery Type	DC 14.4 V Li-ion 2600 mAh
	Dust Collector Capacity	0.6 L
	Cleaning Time	Max. 100 mins
	Charging Time	300 - 360 mins

	Input	19 V  0.6 A
	Output	19 V  0.6 A

Customer Service

✉ Email: support@eufylife.com

💬 Live chat: www.eufylife.com

☎ Customer service hotline:

(US) +1(800) 988 7973 Mon-Fri 9:00am - 5:00pm (PT)

(UK) +44 (0) 1604 936200 Mon-Fri 6:00 - 11:00 (GMT)

(DE) +49 (0) 69 9579 7960 Mon-Fri 6:00 - 11:00

(中国) +86 400 0550 036 周一至周五 9:00 - 17:30

(日本) +81 03 4455 7823 月-金 9:00 - 17:00

 @EufyOfficial  @EufyOfficial  @EufyOfficial  @EufyOfficial

Anker Innovations Limited
Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong

جدول المحتويات

تعليمات السلامة الهامة 26

حول RoboVac 28

محتوى العلبة

التركيب البنوي لجهاز RoboVac

مؤشر LED

استخدام RoboVac 33

تلميحات هامة قبل الاستخدام

لتجهيز

شحن RoboVac

تشغيل/إيقاف تشغيل التنظيف

تحديد وضع تنظيف

ضبط الوقت والتنظيف المجدول

التنظيف والصيانة 41

تنظيف جامع الغبار والفلاتر

تنظيف الفرشاة الدوّارة

تنظيف الفرشي الجانبية

استبدال الفرشي الجانبية

تنظيف أجهزة الاستشعار ومشبكي الشحن

تنظيف العجلة الدوّارة

استكشاف الأخطاء وإصلاحها 46

المواصفات 48

خدمة العملاء 48

شكراً لشرائك جهاز RoboVac 11c Pet Edition. اقرأ كل التعليمات قبل استخدام هذا المنتج واحتفظ بها للرجوع إليها في المستقبل.

تعليمات السلامة الهامة

للد من خطر وقوع إصابة أو حدوث ضرر، اقرأ تعليمات الأمان هذه بعناية وأبقها في متناول يديك عند إعداد هذا الجهاز واستخدامه وصيانتته.

رموز التحذير المستخدمة



هذا رمز تنبيه الأمان. ينبهك هذا الرمز بشأن مخاطر محتملة قد تؤدي إلى حدوث ضرر في الأملاك و/أو وقوع إصابة جسدية خطيرة أو التسبب بالوفاة.

- يمكن أن يستخدم هذا الجهاز الأطفال بعمر 8 سنوات وما فوق والأشخاص ذوو القدرات البدنية أو الحسية أو الذهنية المحدودة أو الذين تنقصهم الخبرة والمعرفة، إذا تم الإشراف عليهم أو إرشادهم بخصوص استخدام هذا الجهاز بطريقة آمنة وإذا كانوا يفهمون المخاطر التي قد تنجم عنه.
- ينبغي الإشراف على الأطفال لضمان عدم لعبهم بهذا الجهاز.
- لا يجب أن يقوم الأطفال بأعمال التنظيف والصيانة من دون إشراف شخص راشد.
- يجب ألا يتم استخدام هذا الجهاز إلا مع وحدة إمداد الطاقة المزودة معه.
- لإعادة شحن البطارية، لا تستخدم سوى وحدة إمداد الطاقة القابلة للفاك المزودة مع هذا الجهاز.
- يجب إزالة البطارية من هذا الجهاز قبل التخلص منه. لإزالة البطارية من هذا الجهاز، قم أولاً بفك البراغي من الجهة السفلية، ثم إزالة لوحة الدارة المطبوعة (PCB) الرئيسية وفك براغي غطاء البطارية باستخدام مفك براغي. أزل البطارية عبر فصل المحوّل السريع.
- ينبغي وضع البطارية المستعملة في كيس بلاستيكي تم إغلاقه جيداً والتخلص منها بأمان وفقاً للتنظيمات البيئية المحلية.
- لا يمكن استبدال الكبل أو السلك الخارجي المرن لوحدة إمداد الطاقة؛ وفي حالة تلف السلك، يجب التخلص من وحدة إمداد الطاقة.
- إن هذا الجهاز مصمّم للاستخدام الداخلي فقط.
- هذا الجهاز ليس لعبة. لا تجلس على هذا الجهاز أو تقف عليه. يجب الإشراف على الأطفال والحيوانات الأليفة عند تشغيل هذا الجهاز.
- احفظ هذا الجهاز وشغله في بيئات معتدلة الحرارة فقط.

- نظّفه بواسطة قطعة قماش مبللة بالماء فقط.
- لا تستخدم هذا الجهاز لالتقاط أي شيء يحترق أو يُصدر دخاناً.
- لا تستخدم هذا الجهاز لالتقاط انسكابات المبيّضات أو الطلاء أو المواد الكيميائية أو أي شيء رطب.
- قبل استخدام هذا الجهاز، التقط الأغراض مثل الملابس والأوراق المبعثرة. وارفع حبال الستائر وانقل أسلاك الطاقة والأغراض القابلة للكسر بعيداً. ففي حال مرّ هذا الجهاز فوق سلك طاقة وجره معه، قد يتسبب بإسقاط غرض ما عن الطاولة أو الرف.
- في حال كانت الغرفة المراد تنظيفها تضمّ شرفة، يجب الاستعانة بحاجز مادي لمنع وصول الجهاز إلى الشرفة وضمان عملية تشغيل آمنة.
- لا تضع شيئاً فوق هذا الجهاز.
- لا تنس أن هذا الجهاز يتحرك من تلقاء نفسه. لذا، توخّ الحذر عند السير في المنطقة التي يعمل فيها هذا الجهاز لتجنب الدوس عليه.
- لا تشغّل هذا الجهاز في مناطق تتضمن منافذ كهربائية مكشوفة على الأرض.
- لا تكشف إلكترونيات هذا الجهاز أو بطاريته أو قاعدة الشحن المضمنة معه. فلا يوجد فيها أي قطع قابلة للتصليح من قبل المستخدم.
- لا تستخدم هذا الجهاز على أرضية غير مكتملة أو مفتوحة أو مشمّعة أو خشنة. فقد يلحق ذلك ضرراً بالأرضية وبهذا الجهاز. استخدمه فقط على أسطح الأرضيات الصلبة أو السجاد قصير الوبر.
- تم تصميم هذا الجهاز ليتم استخدامه على الأرضيات من دون خدشها. غير أننا نوصي باختبار هذا الجهاز على مساحة صغيرة من الغرفة المراد تنظيفها لضمان عدم حدوث أي خدوش قبل تنظيف الغرفة بكاملها.


إشعار



يشير هذا الرمز الموجود على الجهاز أو غلافه إلى ما يلي: لا تتخلص من الأجهزة الكهربائية كفايات بلدية غير مفرزة، بل سلمها إلى منشآت منفصلة لتجميع النفايات. واتصل بالسلطة المحلية لديك للحصول على معلومات بشأن أنظمة التجميع المتوفرة. إذا تم التخلص من الأجهزة الكهربائية في مكبات أو مدافن النفايات، يمكن أن تتسرب مواد خطيرة إلى المياه الجوفية وتدخل السلسلة الغذائية، فيلحق ذلك ضرراً بصحتك وسلامتك. عند استبدال الأجهزة القديمة بأجهزة جديدة، يكون بائع التجزئة ملزماً قانونياً باسترداد جهازك القديم مجاناً على الأقل ليتم التخلص منه على النحو الصحيح.

حول RoboVac



محتوى العلبة



RoboVac 11S




قاعدة الشحن

جهاز التحكم عن بُعد
(بطاريات حجم AAA)


محول الطاقة




أداة التنظيف



فراش جانبية (4 وحدات)



فلتر عالي الأداء إضافي




فلتر إسفنجي إضافي




دليل المالك ومستندات أخرى

التركيب البنيوي لجهاز RoboVac


الجهتان العلوية والجانبية

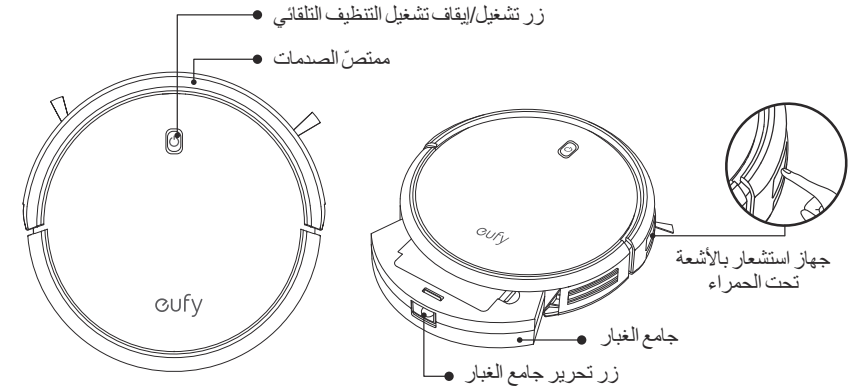


الجهة السفلية

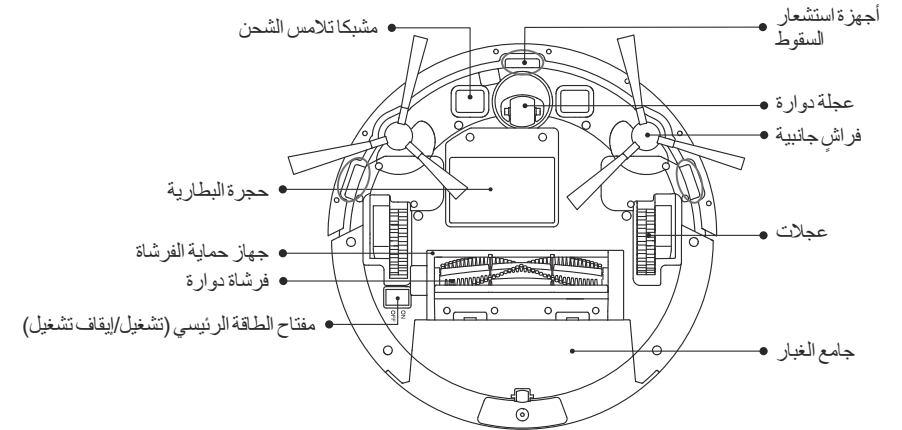


جامع الغبار

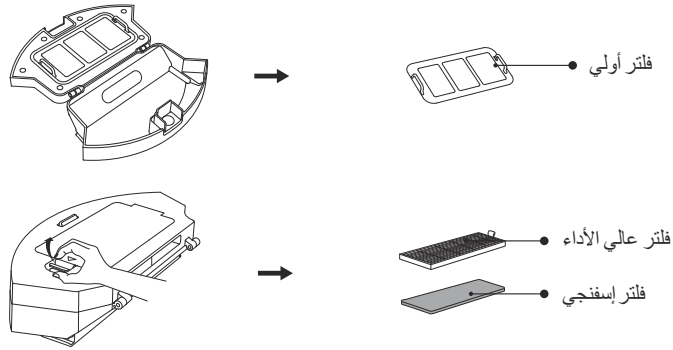

مدخل الشفط

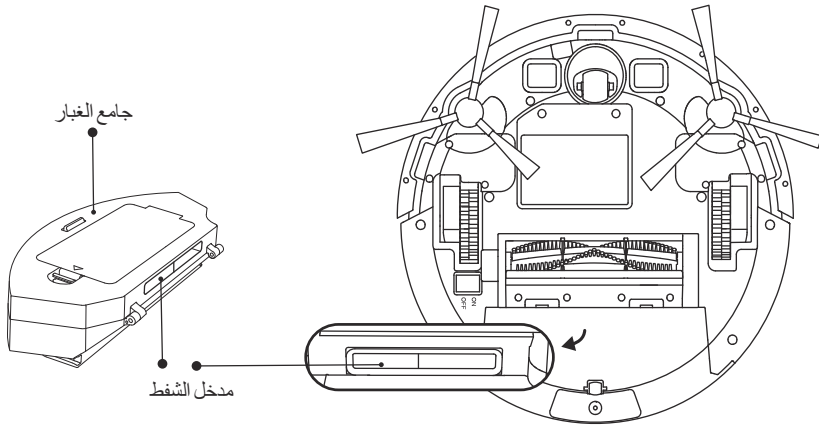


قاعدة الشحن

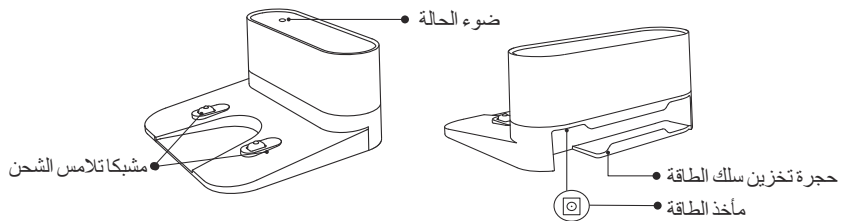


جهاز التحكم عن بُعد

- 1 تشغيل التنظيف التلقائي
- 2 تشغيل التنظيف التلقائي إيقاف تشغيل التنظيف
- 3 تشغيل تنظيف البقع
- 4 تشغيل تنظيف الحواف
- 5 ضبط الوقت
- 6 ضبط مستوى قوة الشفط في وضع التنظيف التلقائي/تنظيف الغرفة الواحدة
- 7 التحكم في اتجاه التنظيف يدوياً
- 8 ضبط الساعة والدقيقة
- 8 تشغيل تنظيف الغرفة الواحدة
- 9 إعادة RoboVac إلى قاعدة الشحن
- 10 جدولة وقت تشغيل التنظيف التلقائي

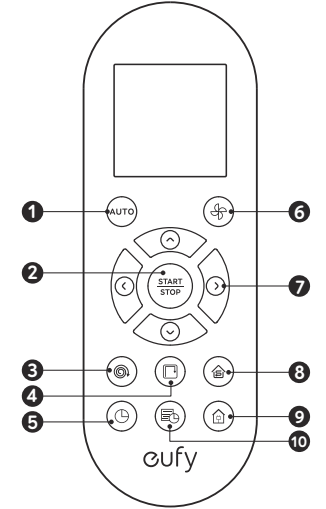

شاشة عرض جهاز التحكم عن بُعد


- 1 الإعادة إلى قاعدة الشحن
- 2 تم تحديد وضع التنظيف التلقائي
- 3 تم تحديد وضع تنظيف البقع
- 4 تم تحديد وضع تنظيف الحواف
- 5 تم تحديد وضع تنظيف الغرفة الواحدة
- 6 الساعة
- 7 تم تمكين قوة الشفط القياسية
- 8 تم تمكين قوة الشفط الديناميكية BoostIQ™
- 9 تم تمكين قوة الشفط القصوى
- 10 وقت تنظيف مجدول

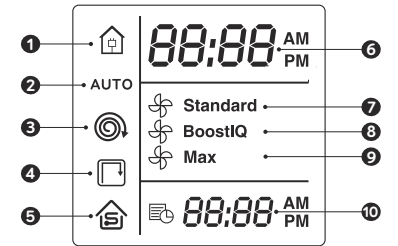

ضع بطاريتين بحجم AAA قبل استخدام جهاز التحكم عن بُعد للمرة الأولى. احرص على أن يكون الطرفان الموجب والسالب مواجهين لاتجاه القطبية الصحيح كما هو مبين في حجرة البطارية.

استخدام RoboVac

تلميحات هامة قبل الاستخدام

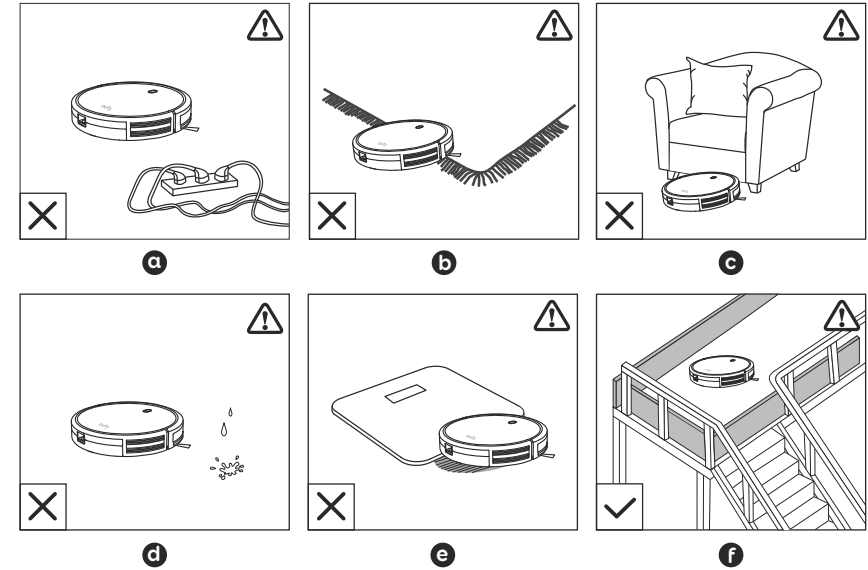

a أزل أسلاك الطاقة والأغراض الصغيرة التي قد تعيق RoboVac من الأرض.

b اطو حواف السجادة المزينة بالشرابات للأسفل بهدف منع تشابك RoboVac. تجنب تنظيف السجاد طويل الوبر ذي اللون الداكن جداً أو السجاد الذي تتجاوز سماكته 1,02 بوصة/26 مم بما أنه قد يتسبب بتعطيل جهاز RoboVac.

c أبق RoboVac بعيداً عن المساحات الأكثر انخفاضاً من 2,87 بوصة/73 مم لتجنب أن يعلق RoboVac. وعند الضرورة، ضغ حاجزاً مادياً لمنع الوصول إلى المناطق التي قد تتسبب بمشاكل.

d أبق RoboVac بعيداً عن المناطق الرطبة.

e يستطيع RoboVac التسلق فوق الأغراض ذات الارتفاع الأقل من 0,63 بوصة/16 مم. أزل هذه الأغراض إذا أمكن.

f تحول أجهزة الاستشعار المضادة للسقوط دون تشقلب جهاز RoboVac على السلالم والمنحدرات الشديدة. وقد تعمل بفعالية أقل إذا كانت متسخة أو تم استخدامها على أرضيات عاكسة أو ذات لون داكن جداً. يوصى بوضع حواجز مادية لمنع وصول RoboVac إلى المناطق التي قد يقع فيها.

ضغ حواجز مادية أمام المواد والمناطق التي قد تلحق ضرراً بجهاز RoboVac في حال دخوله إليها.


مؤشر LED

يمكنك الاطلاع على حالة جهاز RoboVac من مؤشر LED.


الحالة	(ضوء الحالة)
قيد الشحن	برتقالي وامض
وضع الاستعداد / التنظيف / مشحون بالكامل	أزرق ثابت
طاقة منخفضة وعودة إلى قاعدة الشحن	برتقالي ثابت
<ul style="list-style-type: none"> RoboVac متوقف عن التشغيل. لتوفير الطاقة، يتم إطفاء الضوء تلقائياً عند عدم إرساء RoboVac على قاعدة الشحن ومرور دقيقة واحدة عليه بدون نشاط. 	متوقف عن التشغيل
واجه جهاز RoboVac خطأ ما راجع قسم "استكشاف الأخطاء وإصلاحها-نغمة الخطأ" في هذا الدليل للاطلاع على الحلول.	أحمر وامض/ثابت + إشارة صوتية

التجهيز

1 ركب الفراشي الجانبية قبل الاستخدام.




2 قم بتشغيل مفتاح الطاقة الرئيسي الموجود أسفل جهاز RoboVac.

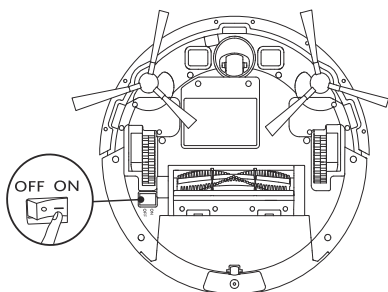


قم بإزالة الملصق المجاور لمفتاح الطاقة وكذلك العوائق الإسفنجية المجاورة لممتص الصدمات قبل الاستخدام.

3 ضع قاعدة الشحن على سطح صلب ومستوي قبالة حائط.

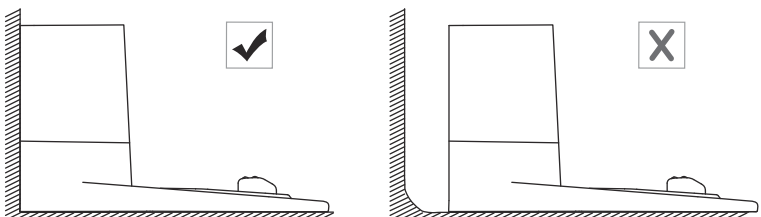


4 أزل الأغراض الموجودة ضمن مسافة 3 أقدام/متر واحد من جهتي اليسار واليمين وضمن مسافة 6 أقدام/مترين من الجهة الأمامية لقاعدة الشحن.

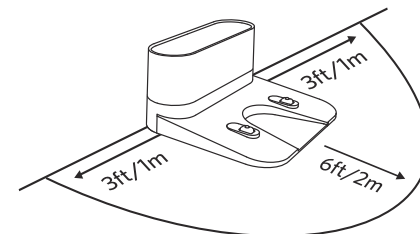


5 صل موصل المحوّل المدوّر بمأخذ الطاقة على قاعدة الشحن والطرف الآخر بالمنفذ في الحائط. عند توصيل قاعدة الشحن بطاقة التيار المتردد، يكون مؤشر LED الموجود على قاعدة الشحن ذا لون أبيض ثابت.

- ضع قاعدة الشحن في موقع يسهّل على RoboVac الوصول إليه. يوصى بإسناد قاعدة الشحن إلى حائط ووضعها على سطح مستوي صلب بدلاً من وضعها فوق السجاد أو البساط.
- أبق دائماً قاعدة الشحن متصلة بمصدر الطاقة، وإلا فلن يعود RoboVac إليها تلقائياً.

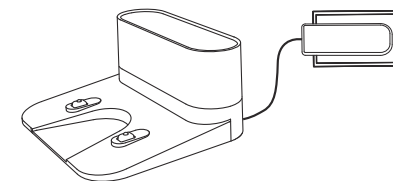


شحن RoboVac

- يتضمن جهاز RoboVac بطارية قابلة للشحن مركبة مسبقاً يجب أن تكون مشحونة بالكامل قبل الاستخدام.
- يعود RoboVac إلى قاعدة الشحن في نهاية دورة تنظيف أو عند انخفاض مستوى شحن بطاريته.
- الطريقة 1: صل RoboVac بقاعدة الشحن عبر محاذاة مشبكي شحن الجهاز مع مشبكي شحن القاعدة.

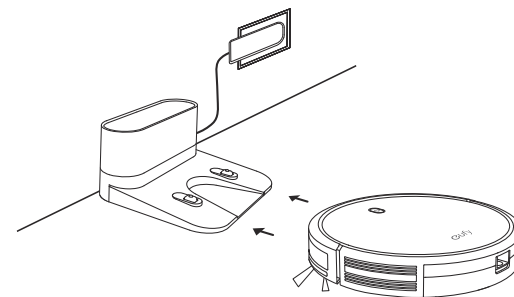

الطريقة 2: اضغط على  في جهاز التحكم عن بُعد لإعادة RoboVac إلى قاعدة الشحن.




أوقف تشغيل مفتاح الطاقة الرئيسي في حال لن يتم استخدام RoboVac لفترة طويلة. للحفاظ على عمر البطارية، اشحنها مرة واحدة على الأقل كل 6 أشهر.


تشغيل/إيقاف تشغيل التنظيف

تأكد من أن مفتاح الطاقة الرئيسي الموجود في أسفل جهاز RoboVac قيد التشغيل قبل الاستخدام.

1. اضغط على  في جهاز RoboVac أو على  في جهاز التحكم عن بُعد لتشغيل التنظيف في الوضع التلقائي.

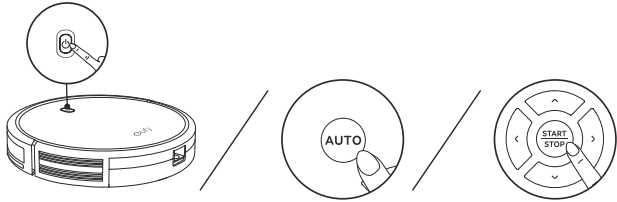

2. اضغط على  في جهاز RoboVac أو على  في جهاز التحكم عن بُعد لإيقاف تشغيل التنظيف.

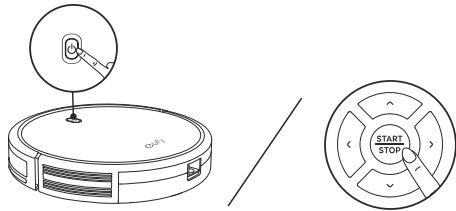


تحديد وضع التنظيف

1. التنظيف التلقائي

يحسّن جهاز RoboVac مسار تنظيفه عن طريق تحديد أوضاع تنظيف مختلفة تلقائيًا إلى أن يكتمل التنظيف. هذا هو وضع التنظيف الأكثر استخدامًا.


اضغط على  في جهاز RoboVac أو على  في جهاز التحكم عن بُعد لتشغيل التنظيف في الوضع التلقائي.

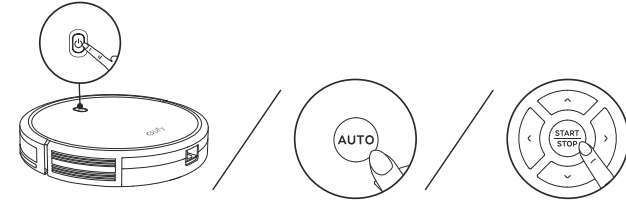




- سيعود RoboVac إلى قاعدة الشحن تلقائيًا عندما يصبح مستوى شحن البطارية منخفضًا أو عندما ينتهي RoboVac من التنظيف.
- يبدأ RoboVac في وضع التنظيف التلقائي بشكل افتراضي عندما يتم تشغيله.

ميزة BoostIQ™

عند تمكين ميزة BoostIQ™، سيزيد RoboVac تلقائيًا قوة الشفط إذا ما اكتشف الحاجة إلى قوة أكبر لضمان أفضل تنظيف ممكن. تُعتبر ميزة BoostIQ™ مثالية لتنظيف السجادات الأكثر سماكة والأوساخ التي يصعب تنظيفها، بحيث تساهم في خفض إجمالي وقت التنظيف لكنها تزيد من مستوى الضوضاء. وإذا أزعجتك ضوضاء التكنيس التي تتسبب بها BoostIQ™، فيمكنك تعطيل هذه الميزة. تعمل هذه الميزة فقط في وضعي التنظيف التلقائي وتنظيف الغرفة الواحدة.

في وضع التنظيف التلقائي أو تنظيف الغرفة الواحدة، اضغط على  في جهاز التحكم عن بُعد بشكل متكرر لضبط مستوى قوة الشفط.


• يتم عرض الرمز المقابل على جهاز التحكم عن بُعد.


الرمز	مستوى قوة الشفط
 Standard	القوة القياسية
 BoostIQ	للتبديل تلقائيًا بين القوة القياسية والقوة المحسنة (والتي تمثل الخيار الافتراضي)
 Max	القوة القصوى

عندما يبدأ جهاز RoboVac بالتنظيف في وضع التنظيف التلقائي أو تنظيف الغرفة الواحدة، سيعمل في المرة التالية على التنظيف وفقًا لمستوى قوة الشفط الذي حدده سابقًا.

4. تنظيف الغرفة الواحدة


ينظف RoboVac غرفة واحدة بشكل مكثف ويتوقف بعد مرور 30 دقيقة. حدد هذا الوضع فقط عند الحاجة إلى تنظيف غرفة محددة واحدة. واحرص على حجز RoboVac في الغرفة عبر إغلاق الباب.

اضغط على  في جهاز التحكم عن بُعد لبدء التنظيف في وضع الغرفة الواحدة.

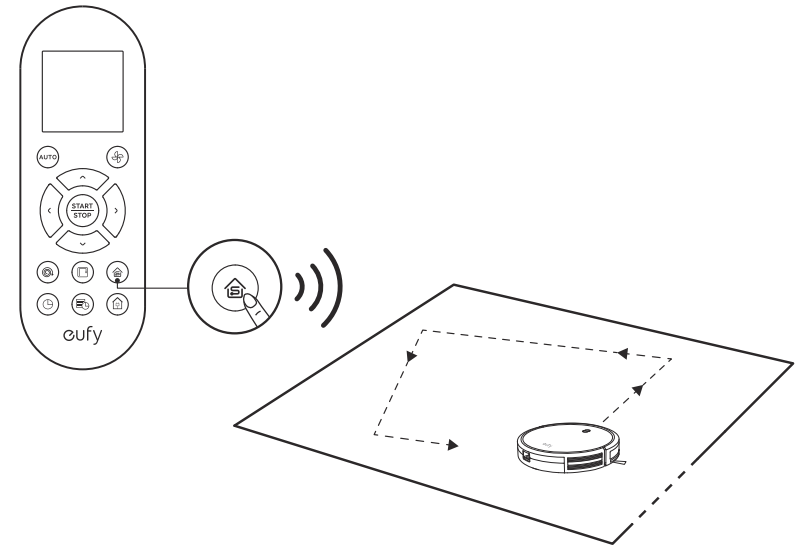

5. التنظيف اليدوي


يمكنك توجيه RoboVac لتنظيف منطقة معينة عبر استخدام الأزرار التوجيهية في جهاز التحكم عن بُعد.

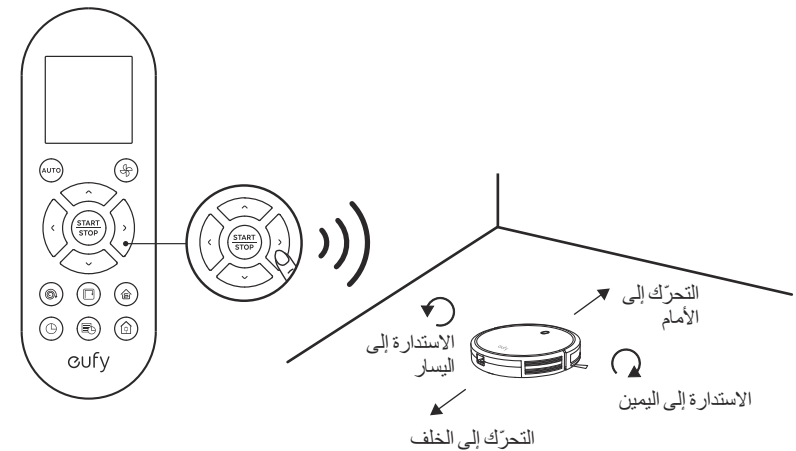

2. تنظيف البقع


ينظف جهاز RoboVac بشكل مكثف منطقة محددة بنمط دائري، ويُعتبر ذلك مفيداً في حال وجود منطقة تتضمن غباراً أو سائلاً كثيرة. في وضع البقع، سوف يقوم جهاز RoboVac بإيقاف التنظيف بعد دقيقتين.


اضغط على  في جهاز التحكم عن بُعد لبدء التنظيف في وضع البقع.

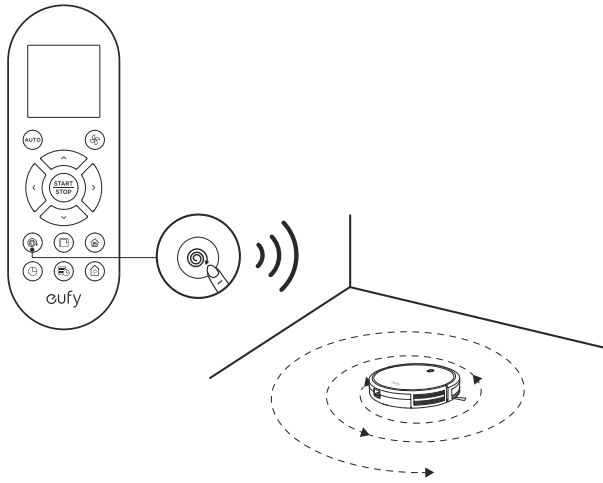

3. تنظيف الحواف

يخفّض RoboVac سرعته عندما يكتشف حائطاً، ثم يسير على طول الحائط ليضمن تنظيف الحافة بعناية. وفي وضع الحواف، سينظف RoboVac لمدة 20 دقيقة، ثم يعود إلى قاعدة الشحن.



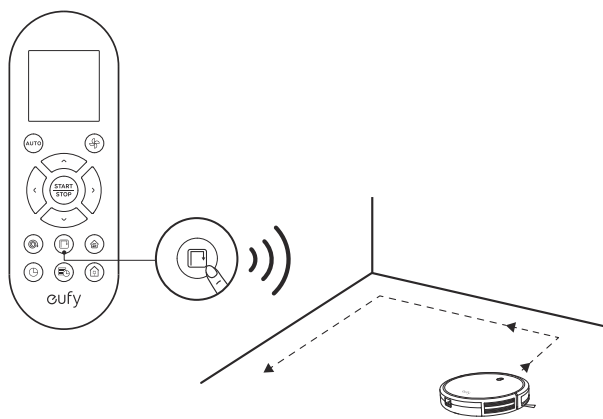


اضغط على  في جهاز التحكم عن بُعد لبدء التنظيف في وضع الحواف.





ضبط الوقت والتنظيف المجدول

ضبط الوقت



تأكد من ضبط الوقت بشكل صحيح حسب توقيتك المحلي قبل ضبط تنظيف مجدول.

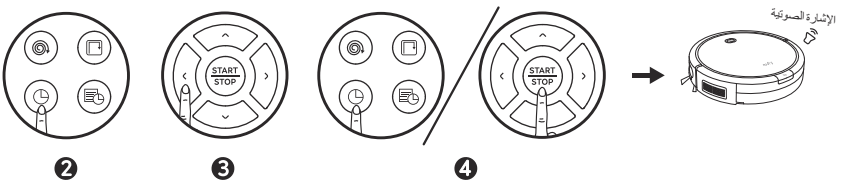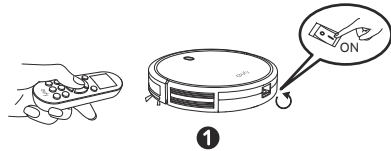- 1 تأكد من أن مفتاح الطاقة الرئيسي الموجود في الجهة السفلية من جهاز RoboVac قيد التشغيل.
- 2 اضغط على  في جهاز التحكم عن بُعد. سوف يومض الوقت على شاشة العرض.
- 3 اضغط على  لضبط "الساعة" و  لضبط "الدقيقة".
- 4 ملاحظة: تأكد من ضبط الخيار "صباحًا/مساءً" بطريقة صحيحة. اضغط على  أو  لحفظ الإعداد. سوف يطلق جهاز RoboVac إشارة صوتية لمرة واحدة للدلالة على ضبط الوقت بنجاح.





للتأكد من ضبط الوقت بنجاح، تأكد من أن RoboVac قيد التشغيل. سوف تسمع إشارة صوتية عند ضبط الوقت.

تعيين تنظيف مجدول



يمكنك جدولة جهاز RoboVac لبدء التنظيف في وقت محدد. لإلغاء تنظيف مجدول سابقًا، اضغط مطولاً على  لمدة 3 ثوانٍ إلى أن يطلق جهاز RoboVac إشارة صوتية مرتين ويختفي .



ملاحظة: قبل تعيين تنظيف مجدول، تأكد من ضبط الوقت بشكل صحيح حسب توقيتك المحلي. راجع القسم السابق "ضبط الوقت" للاطلاع على كيفية ضبط الوقت.

- 1 تأكد من أن مفتاح الطاقة الرئيسي الموجود في الجهة السفلية من جهاز RoboVac قيد التشغيل.
- 2 اضغط على  في جهاز التحكم عن بُعد. سوف يومض  على شاشة العرض.

3 اضغط على  لضبط "الساعة" و  لضبط "الدقيقة".

ملاحظة: تأكد من ضبط الخيار "صباحًا/مساءً" بطريقة صحيحة.

4 اضغط على  أو  لحفظ الإعداد. سوف يطلق جهاز RoboVac إشارة صوتية لمرة واحدة للدلالة على ضبط موعد مجدول بنجاح.

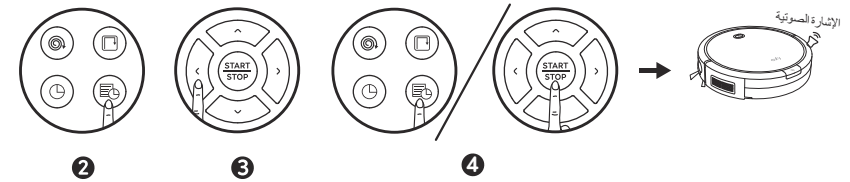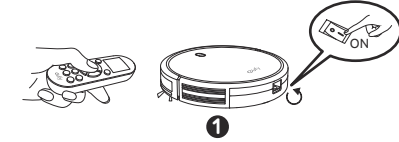

للتأكد من ضبط موعد مجدول بنجاح، تأكد من أن جهاز RoboVac قيد التشغيل. سوف تسمع إشارة صوتية عند ضبط الموعد المجدول.

التنظيف والصيانة


للحصول على الأداء الأمثل، اتبع التعليمات أدناه لتنظيف جهاز RoboVac وصيانتها بانتظام. يعتمد معدل تكرار التنظيف/التبديل على عاداتك في استخدام جهاز RoboVac.

معدل تكرار التنظيف/التبديل الموصى به:


جزء RoboVac	معدل تكرار التنظيف	معدل تكرار التبديل
جامع الغبار	بعد كل استخدام	-
الفلاتر	مرة واحدة في الأسبوع	كل شهرين
الفرشاة الدوارة	مرة واحدة في الأسبوع	كل 6 إلى 12 شهرًا
الفرشاة الجانبية	مرة واحدة في الشهر	كل 3 إلى 6 أشهر (أو عند تعرضها لاهتراء واضح)
جهاز حماية الفرشاة	مرة واحدة في الشهر	مرة كل 3 إلى 6 أشهر (أو عندما يصبح شريط السيليكون المطاطي الموجود على جهاز حماية الفرشاة مهترئًا بشكل واضح)
أجهزة الاستشعار	مرة واحدة في الشهر	-
مشبكا الشحن	مرة واحدة في الشهر	-
العجلة الدوارة	مرة واحدة في الشهر	-

تنظيف جامع الغبار والفلاتر


- 1 اضغط على زر تحرير جامع الغبار لإخراج جامع الغبار.
- 2 افتح جامع الغبار وأفرغه.

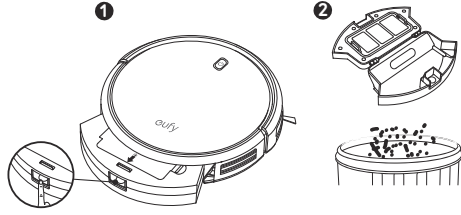


- 3 أزل الفلتر الأولي عبر سحب الخطافات كما هو مبين.

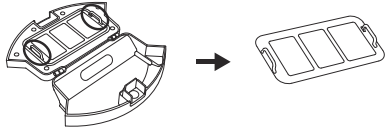


- 4 أخرج الفلتر الإسفنجي والفلتر عالي الأداء.

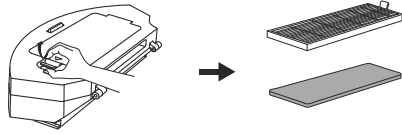


- 5 نظّف جامع الغبار والفلاتر بواسطة مكنسة كهربائية أو فرشاة تنظيف.

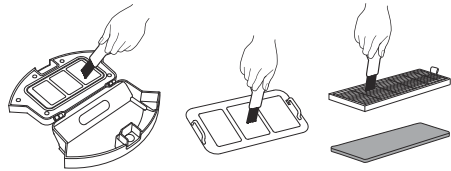

- 6 أعد وضع الفلاتر والفلتر الأولي معًا في جامع الغبار.

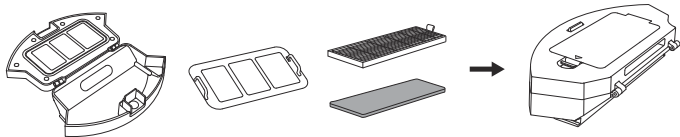

- 7 ادفع بجامع الغبار إلى مكانه في الوحدة الرئيسية.



يمكنك غسل جامع الغبار والفلتر الأولي والفلتر الإسفنجي بالماء. واحرص على تجفيف كل القطع بعناية قبل إعادة جمعها. لا تغسل الفلتر عالي الأداء بالماء، فقد يلحق ذلك ضررًا بالفلتر ويحدّ من قوة الشفط.



تنظيف الفرشاة الدوّارة


- 1 اسحب لساني التحرير لإلغاء قفل جهاز حماية الفرشاة كما هو مبين.

- 2 ارفع الفرشاة الدوّارة لإزالتها.

- 3 نظّف الفرشاة الدوّارة بواسطة أداة التنظيف الموفرة أو مكنسة كهربائية.

- 4 أعد تركيب الفرشاة الدوّارة عبر إدخال الطرف البارز والثابت أولاً، ثم دفعها حتى تستقرّ في مكانها.


- 5 اضغط للأسفل لتثبيت جهاز حماية الفرشاة في مكانه.

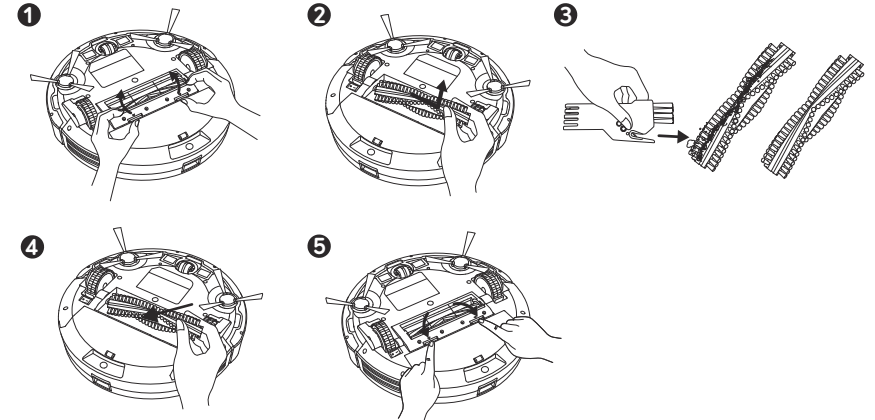

تنظيف الفرش الجانبية

قد تعلق مواد غريبة، مثل الشعر، بسهولة في الفرش الجانبية، وقد تلتصق الأوساخ بها. احرص على تنظيفها بصورة منتظمة.

- 1 قم بإزالة الفرش الجانبية.
- 2 فك بعناية أي خصلة شعر أو شريط ملتف بين الوحدة الرئيسية والفرش الجانبية وانزعها.
- 3 قم باستخدام قطعة قماش مبللة بماء دافئ لإزالة الغبار من الفرش أو إعادة تشكيلها بلطف.

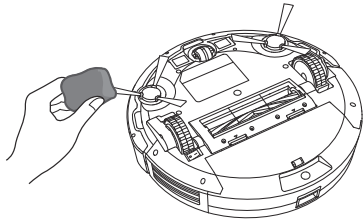


لا تستخدم الفرش الجانبية سوى عندما تكون جافة تمامًا.



استبدال الفرش الجانبية

بعد استخدام الفرش الجانبية لفترة من الزمن، قد تصبح متنية أو تالفة. اتبع التعليمات أدناه لاستبدالها.


انزع الفرش الجانبية القديمة وضع الفرش الجديدة في مكانها.

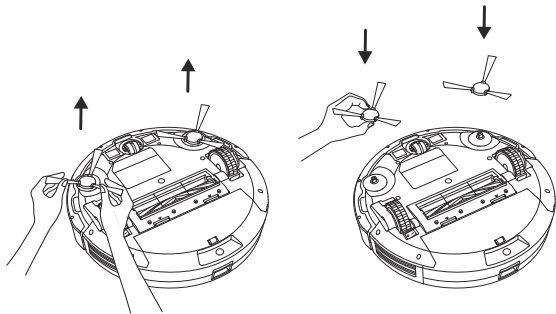

تنظيف أجهزة الاستشعار ومشبكي الشحن


للحفاظ على أفضل أداء، نظف أجهزة استشعار السقوط ومشبكي الشحن بصورة منتظمة.

- أزل الغبار عن أجهزة استشعار السقوط ومشبكي تلامس الشحن باستخدام قطعة قماش أو فرشاة تنظيف.

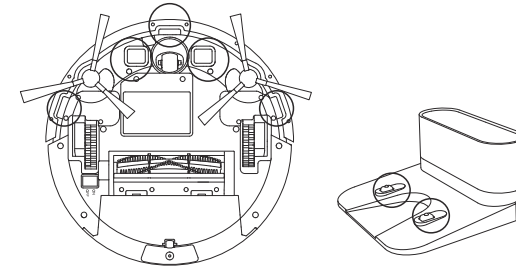


تنظيف العجلة الدوّارة

يمكن بسهولة أن تعلق خصل الشعر أو جزيئات الغبار في العجلة الدوّارة. تأكد من تنظيف العجلة الدوّارة بشكل دوريّ وحسب الحاجة.



- 1 اسحب العجلة الدوّارة إلى الخارج.



- 2 نظف أي شعر أو أوساخ ملتفة حول العجلة أو عالقة داخل تجويف العجلة.
- 3 أعد تركيب العجلة وادفعها إلى الداخل إلى أن تستقر في مكانها وتطلق صوت طقطقة.

- يمكنك تنظيف العجلة الدوّارة بالماء.

- استخدم العجلة الدوّارة فقط عندما تكون جافة تمامًا.



استكشاف الأخطاء وإصلاحها

الأسئلة الشائعة:

المشاكل	الحلول
يتعذر تنشيط RoboVac.	<ul style="list-style-type: none"> تأكد من أن مفتاح الطاقة الرئيسي مضبوط على موضع ON (التشغيل). تأكد من أن البطارية مشحونة بالكامل. استبدل البطاريتين (بحجم AAA) في جهاز التحكم عن بُعد. تأكد من أن جهاز التحكم عن بُعد موجود ضمن نطاق جهاز RoboVac (يبلغ عنه مسافة 16 قدمًا/5 أمتار). إذا استمرت المشكلة، أوقف تشغيل مفتاح الطاقة الرئيسي، ثم أعد تشغيله.
جهاز التحكم عن بعد لا يعمل.	<ul style="list-style-type: none"> استبدل البطاريتين في جهاز التحكم عن بُعد. تأكد من أن جهاز RoboVac قيد التشغيل ومشحون بالكامل.
توقف RoboVac عن العمل فجأة.	<ul style="list-style-type: none"> تحقق مما إذا كان هناك حاجز يعيق RoboVac. تحقق مما إذا كان مستوى شحن البطارية منخفضًا. إذا استمرت المشكلة، أوقف تشغيل مفتاح الطاقة الرئيسي وانتظر لمدة ثابيتين، ثم أعد تشغيله.
لا يمكنك جدولة عمليات التنظيف.	<ul style="list-style-type: none"> تأكد من أن مفتاح الطاقة الرئيسي الموجود في الجهة السفلية من جهاز RoboVac قيد التشغيل. تأكد من ضبط الوقت، والوقت من اليوم (صباحًا/مساءً)، والوقت المجدول بطريقة صحيحة. تحقق مما إذا كانت طاقة RoboVac منخفضة جدًا لبدء التنظيف.
قوة الشفط ضعيفة.	<ul style="list-style-type: none"> تحقق من وجود أي عوائق تسد مدخل الشفط. أفرغ جامع الغبار. نظف الفلاتر بواسطة مكنسة كهربائية أو فرشاة تنظيف. تحقق مما إذا كانت الفلاتر مبللة بسبب الماء أو أي سائل آخر على الأرض. جفف الفلاتر بالهواء تمامًا قبل الاستخدام.
يتعذر شحن RoboVac.	<ul style="list-style-type: none"> تحقق مما إذا كان المؤشر الموجود على قاعدة الشحن مُضاءً أم لا. إذا لم يكن كذلك، فاتصل بمركز خدمة eufy لإصلاح قاعدة الشحن أو استبدالها. أزل الغبار عن مشبكي تلامس الشحن بواسطة قطعة قماش جافة. تحقق مما إذا كنت تسمع إشارة صوتية أم لا عند إرساء جهاز RoboVac على قاعدة الشحن. إذا لم يكن كذلك، فاتصل بمركز خدمة eufy لإصلاح قاعدة الشحن أو استبدالها.
يتعذر على جهاز RoboVac العودة إلى قاعدة الشحن.	<ul style="list-style-type: none"> أزل الأغراض الموجودة ضمن مسافة 3 أقدام/متر واحد من جهتي اليسار واليمين وضمن مسافة 6 أقدام/مترين من الجهة الأمامية لقاعدة الشحن. عندما يكون RoboVac بجوار قاعدة الشحن، سيعود بسرعة أكبر. ولكن، إذا كانت قاعدة الشحن بعيدة، فسيحتاج RoboVac إلى مزيد من الوقت للعودة. يرجى التحلي بالصبر وهو في طريقه للعودة. نظف مشبكي تلامس الشحن.

المشاكل	الحلول
الفرشاة الدوارة لا تدور.	<ul style="list-style-type: none"> نظف الفرشاة الدوارة. تأكد من تركيب الفرشاة الدوارة وجهاز حماية الفرشاة بطريقة صحيحة.
حركات جهاز RoboVac أو مسار تنقله غير طبيعي.	<ul style="list-style-type: none"> نظف أجهزة الاستشعار بعناية بواسطة قطعة قماش جافة. أعد تشغيل جهاز RoboVac عبر إيقاف تشغيل مفتاح الطاقة وإعادة تشغيله.

نغمات الأخطاء

عندما يواجه جهاز RoboVac مشكلة، سيصدر سلسلة من الإشارات الصوتية القصيرة أو الطويلة وسيكون المؤشر الأحمر على الجهاز ثابتًا أو وامضًا.


ضوء المؤشر الأحمر الواضخ


نغمة الخطأ	السبب	الحل
إشارة صوتية واحدة	<ul style="list-style-type: none"> إن جهاز RoboVac عالق وإحدى عجلاته لا تلمس الأرض (إنها معلقة في الهواء). قد يكون جهاز RoboVac في غرفة شاسعة جدًا ولا يكشف ممتص الصدمات العوائق. 	يرجى إعادة تشغيل التنظيف جهاز في موقع جديد.
إشارتان صوتيتان	ممتص الصدمات الخاص بجهاز RoboVac عالق.	اضرب على ممتص الصدمات لجهاز RoboVac عدة مرات بهدف إخراج أي أوساخ قد تكون عالقة تحته.
ثلاث إشارات صوتية	<ul style="list-style-type: none"> جهاز RoboVac عالق على رف درج السلم ولا يمكنه التحرك في الاتجاه العكسي. 	<ul style="list-style-type: none"> نظف أجهزة استشعار السقوط لجهاز RoboVac ممتسحة. ضع جهاز RoboVac في مكان جديد. استخدم حاجزًا ماديًا لمنع الوصول إلى المناطق التي قد تتسبب بمشاكل.
أربع إشارات صوتية	مستوى طاقة RoboVac منخفض جدًا.	اشحن RoboVac يدويًا لمدة 5 ساعات على الأقل.

ضوء المؤشر الأحمر ثابت

نغمة الخطأ	السبب	الحل
إشارة صوتية واحدة	عجلة RoboVac اليسرى/اليمنى عالقة.	أوقف تشغيل RoboVac وأزل أي شعر أو أوساخ عالقة في العجلة اليسرى/اليمنى.
إشارتان صوتيتان	الفرشاة الجانبية الخاصة بجهاز RoboVac عالقة.	أوقف تشغيل RoboVac وأزل أي شعر أو أوساخ عالقة في الفرشاة الجانبية.
ثلاث إشارات صوتية	مروحة الشفط الخاصة بجهاز RoboVac عالقة.	<ul style="list-style-type: none"> أوقف تشغيل RoboVac، ثم أخرج جامع الغبار وأفرغه. تأكد من أن مدخل الشفط غير مسدود بواسطة أي شعر أو أوساخ.
أربع إشارات صوتية	الفرشاة الدوارة الخاصة بجهاز RoboVac عالقة.	أوقف تشغيل RoboVac وأزل أي شعر أو أوساخ عالقة في الفرشاة الدوارة.

المواصفات

T2108	طراز المنتج	
19 فولت 0,6 أمبير	الإدخال	
التيار المستمر 14,4 فولت	الجهد الكهربائي للبطارية	
25 واطًا	استهلاك الطاقة	
التيار المستمر 14,4 فولت	نوع البطارية	
بطارية ليثيوم-أيون 2600 ميلي أمبير في الساعة	سعة جامع الغبار	
0,6 لتر	وقت التنظيف	
100 دقيقة كحد أقصى	وقت الشحن	
300 - 360 دقيقة		

19 فولت 0,6 أمبير	الإدخال	
19 فولت 0,6 أمبير	الإخراج	

خدمة العملاء

البريد الإلكتروني: support@eufylife.com ✉

الدرشة المباشرة: www.eufylife.com 💬

الخط الساخن لخدمة العملاء: ☎

(US) +1 (800) 988 7973 Mon-Fri 9:00am - 5:00pm (PT)

(UK) +44 (0) 1604 936200 Mon-Fri 6:00 - 11:00 (GMT)

(DE) +49 (0) 69 9579 7960 Mon-Fri 6:00 - 11:00

(中国) +86 400 0550 036 周一至周五 9:00 - 17:30

(日本) +81 03 4455 7823 月-金 9:00 - 17:00

 @EufyOfficial  @EufyOfficial  @EufyOfficial  @EufyOfficial

Anker Innovations Limited
Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong