

2.4GHz+ Bluetooth Wireless Professional Gaming Headset



Front 封面

K3 User Manual

FOR PS, XBOX, Switch, IPAD, Smart Phone, PC, Laptop

V1.0 20250510

K3-说明书  
材质: 70g书纸  
尺寸: 105mmx148mm  
装订方式: 折页

Product Description




- 1. 2.4G/BT Switching Key
- 2. 7.1 Sound Effects/Effect Lights
- 3. Microphone Mute
- 4. On/Off Button
- 5. Volume+/Volume-
- 6. LINE-IN Interface
- 7. Type-C Interface
- 8. Status Light
- 9. External Microphone
- 10. Built-in Microphone

Specifications

Name: Wireless Headset / wireless headset 2.4G Dongle  
Model NO.: K3  
Wireless Version: V5.3  
Support: AAC/SBC/HSP1.2/HFP1.8/A2DP/AVRCP  
Input: 5V=0.5A  
Charge Interface: USB-C  
Communication Distance: >10m  
Music Playing Time: >40H (Lights OFF Mode)  
Battery Capacity: 3.7V 1000mAh,3.7Wh  
Fully Charging Time: About 2.5H  
Speaker Size: φ50.0mm  
Frequency Response Range: 20Hz to 20KHz  
Support Device: PC, PS4, PS5, Switch, Xbox, Smart Phone, PC, Laptop, Smart Watch, Tablet, etc

How to Connect

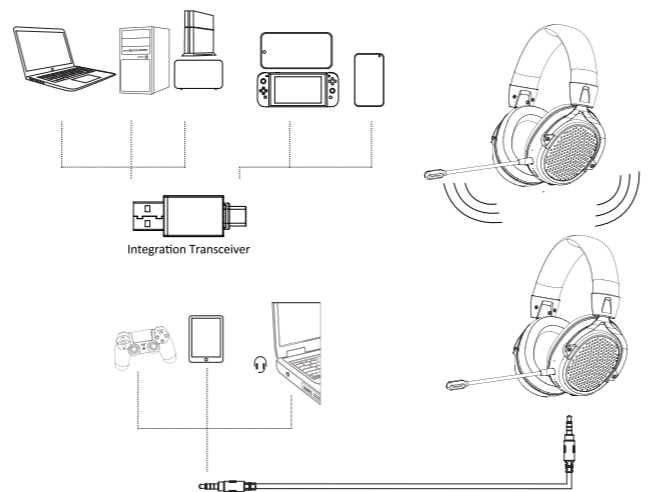

Launcher

**Device plug: Compatible with laptop/PC/PS4/PS5/TV/Switch.**  
When using, plug in the computer's A-end USB interface or B-end Type-C interface for plug and play wireless connection.  
Inserting the transmitter into the USB interface on the A-end of the computer will automatically connect the Windows system to Type-C phones, laptops, etc. On the B-end without the need for users to install drivers or run additional software.  
1. After inserting the transmitter into the USB interface on the A terminal of the computer, the green indicator light of the transmitter flashes at this time, and the green light remains on after the headset is turned on and the code is checked, On the computer, you can view the icon in the lower right corner of the device that displays OW310, indicating that the wireless headset device has been successfully installed. "On first use, open the 'Audio' bar of the 'Sounds and Audio Device Properties' of this device and set it to the default."  
2. Insert the B-terminal Type-C transmitter into the phone or laptop with the Type-C interface, and automatically turn on the pairing mode. The green light flashes quickly, and the green light remains on after the code is matched. The B-terminal Type-C transmitter is inserted into the phone interface, and the green indicator of the transmitter flashes. The wireless headset is turned on, and the green light remains on after the code is matched. This indicates that the plug and play wireless connection device has been successfully installed.  
**How to re-pair when unable to connect with your device.**  
1. After the transmitter is inserted into the device, follow the steps 1 and 2 above to connect.  
2. Pairing operation between transmitter and earphone: Press and hold the power button+7.1 button for 5

seconds to pair again. The pairing sound "Pairing" flashes quickly, and then insert the USB dongle to connect successfully. The green light remains on.  
1. Device side plug: compatible with PC (32-bit/64bit)/PS4/PS5/XBOX LINE IN mode/Ninto SwitchAndroid/iOS mobile devices/devices with 3.5 audio interface.  
2. Instructions for using the Line-in interface: Plug in the Line-in cable to shut down the wireless device. turn off the headset effect light, and enter the wired headset mode.  
3. External microphone use: insert and enable the external microphone, and unplug and disable the microphone.

Operation Instruction

Button	Function	Operate	Step
2.4G/BT Switching Key	2.4G/BT Mode	Move Down/ Move Up	1. Move down to 2.4G mode, with a green light indicating 'USB mode'. 2. Move up to BT mode, with a blue light indicating 'Bluetooth mode'.
7.1	Virtual 7.1/ Effect Light Switch	Click/ Double Click	1. Turn on the default music mode for the headphones, click to turn on virtual 7.1 mode, and then click to turn on music mode. 2. The earphones default to displaying the effect light. Double click on the effect light to turn it off, and then double click on the effect light to turn it on.
Mic Mute	Mic Mute Mode	Click	Click the button. When you hear the prompt tone 'microphone off', the microphone will be turned off. Click the button again. When you hear the prompt tone "microphone on", the microphone will be turned on.
On/Off Key/ Pause/Play	On/Off Key/ Pause/Play	Long Press for 2 Seconds/ Click	1. Press and hold the power button for 2 seconds in the shutdown state to hear the 'power on' effect light constantly on and the pairing light flashes quickly. Press and hold the power button for 2 seconds in the start up state to hear the 'power off' effect light turn off and the pairing light turns off. 2. In music playback mode, click the power button to pause. 3. In music playback mode, click the power button to play.
2.4G/BT Pairing Mode	2.4G/BT Pairing Mode	Long press for 5 Seconds	In the shutdown state, press and hold the power button+7.1 button for 5 seconds to reenter pairing mode. The 'Pairing' pairing light flashes quickly.
Answer/Hang up/Reject	Answer/Hang up/Reject	Click/Double Click	1. In Bluetooth mode, when a call is incoming, click the power button to answer it. 2. In Bluetooth mode, during a call, click the power button to hang up. 3. In call mode, double-click the headset to reject the call (Bluetooth mode).
Connect/ Disconnect	Connect/ Disconnect	/	1. The 'Connected' pairing light is constantly on when connecting the headphones to the phone. 2. Connect the headphones to the phone Connect it, then turn off the Bluetooth mode prompt tone of the phone, and the 'Distinct' pairing light will flash quickly.
Increase/ Decrease Volume	Increase/ Decrease Volume	Slide Up/ Down	Slide up to increase the volume to the maximum prompt sound of beep. (Note: There is no prompt sound during playback. You need to press the pause button to have the beep prompt sound)
Built-in Microphone Mode	Built-in Microphone Mode	Voice Call	When you start a voice call, the call ENC function is automatically enabled.
USB	Type-C Charging	Insert Charging Cable	Charging current: 500mA, red light on for long charging, green light on when fully charged.

Matters Needing Attention

- (1) Please enjoy music at a moderate volume to prevent adverse effects on the hearing.
- (2) Please be careful to wear when driving or cycling so as not to affect safety.
- (3) Product specifications are subject to change without notice.
- (4) If disassemble the headset without authorization, we can not guarantee the quality.

What's in the Box

- (1) Headphone\*1
- (2) 2.4G Dongle\*1
- (3) Aux Cable\*1
- (4) Charging Cable\*1
- (5) User Manual\*1

FAQ

- 1. What about the distortion or jamming of the wireless headset?**  
**Answer:**  
1. Check the source of music.  
2. Disconnect other devices.  
3. Re-plug the transmitter and pair it.  
**2. Play multiple players on the PC and the jamming operation fails, but the headset function is normal?**  
**Answer:**  
1. Check the playback decoder.  
2. Turn off multiple players in the background.  
3. Check whether there is any obstacle between the headset and the PC terminal that will affect the signal transmission between them.

\* When the battery voltage is below 3.2V while playing music, it indicates a low battery warning. The warning will sound every 3 minutes (without interrupting the playback sound), with a warning sound of "Low Battery" and a flashing red light. When the battery voltage is below 3.1V, the system will automatically shut down and a warning sound of "power off".  
The low battery prompt of the earphones indicates that you are ready to charge the earphones to saturation before continuing to use them.

Battery Warning

- Using the wrong battery can cause fire and other hazards (for example, in the case of some lithium battery types)
- 1. Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.
  - 2. Do not leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas.
  - 3. A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

FCC Caution

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.  
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and  
(2) This device must accept any interference received, including interference that may cause undesired operation.  
Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.  
These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.  
However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:  
— Reorient or relocate the receiving antenna.  
— Increase the separation between the equipment and receiver.  
— Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.  
— Consult the dealer or an experienced radio/TV technician for help.  
This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

ISED Warning

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:  
(1) This device may not cause interference, and  
(2) This device must accept any interference, including interference that may cause undesired operation of the device.  
Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:  
(1) L'appareil ne doit pas produire de brouillage, et  
(2) L'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.  
The device is compliance with RF exposure guidelines, users can obtain Canadian information on RF exposure and compliance.  
Le présent appareil est conforme  
Après examen de ce matériel aux conformités ou aux limites d'intensité de champ RF, les utilisateurs peuvent sur l'exposition aux radiofréquences et la conformité and compliance d'acquérir les informations correspondantes.

Caution

DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS  
The symbol indicates DC voltage  
RECYCLING  
This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment. User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.  
This product can be used across EU member states.  
The device is low power device, it can meet the requirement of the RF exposure.  
Hereby declares that this device is in compliance with the essential requirements and other relevant provisions of the Directive 2014/53/EU.  
Notes:  
1. High Sound Pressure.  
2. Hearing Damage Risk.  
3. Do not listen at high volume levels for long periods.



Made in China