


Sunco

Lighting made better.

User Manual

4" LED Selectable Slim Downlight

SKU: DL_SL4-10W-27K_5K

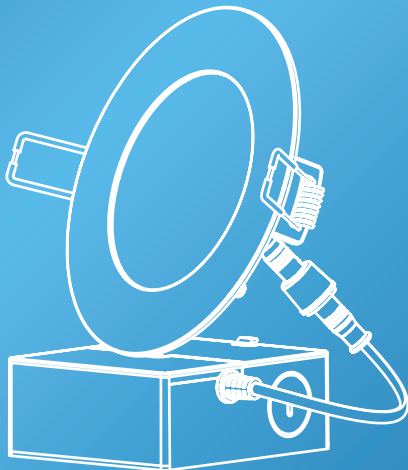


support@sunco.com
(844) 334-9938



What's in the Box?


Slim Downlight

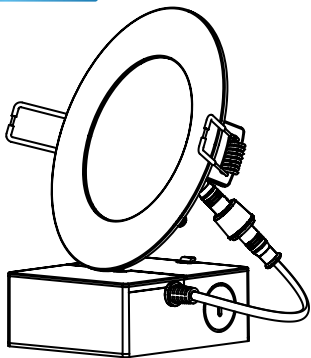

A

x1

Light Fixture



B

x1

Junction Box



C

x1

Installation Template







D

x2


Wire Nuts

Why Plastic Junction Boxes?


At Sunco, our commitment to safety and reliability is at the core of our lighting solutions, ensuring your peace of mind.

-  Plastic's **corrosion resistance** ensures longer product lifespans with minimal maintenance.
-  Plastic junction boxes are **non-conductive**, significantly helping prevent potential fires.
-  Plastic junction boxes feature **smooth edges**, minimizing accidental cuts.
-  No need for ground wire because plastic is not conductive.

Get Your Gear (Not Included)



Wire Clamp



Hole Saw



Ladder



Wire Strippers

Before You Start

Safety Information

To reduce the risk of fire, electric shock, or physical injury:

- Turn off circuit breaker before installing this fixture.
- Professional installation required. Safety gear recommended.
- Abide by regional and local laws or regulations.
- Proper grounding is required to ensure safety.
- Do not alter, or remove wiring during installation.
- Do not make or alter any open holes in wiring enclosure or electrical components during installation.
- Check for shipping damage before installing. If the product is damaged, do not use it.
- Keep fixture away from corrosive substances.
- Clean the fixture regularly to ensure proper operation. Do not clean with harsh solvents.
- Suitable for damp locations at temperature ranging from -4°F to 104°F. Not for use where directly exposed to water.
- Use safety precautions & abide by regional & local laws or regulations.
- This product is not compatible with 3rd party sensors.
- This product is not compatible with photo controls.
- This product is not compatible with occupancy sensors.
- This product is not compatible with timing devices.


⚠️WARNING:

Cancer & Reproductive Harm-
www.P65Warnings.ca.gov

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:
1.) This device may not cause harmful interference.


2.) This device must accept any interference that may cause undesired operation. Please review all instructions carefully prior to installation.

Quickstart Guide




Step 1

Use template to cut hole.




Step 2

Connect luminaire & junction wires.



Step 3

Attach fixture to junction box.




Step 4

Insert fixture into ceiling.

Installation Guide


STEP 1


- Turn off circuit breaker before installation.
- Cut out 4.33" housing size on Installation Template (C), then tape onto ceiling in desired location.
- Cut ceiling hole using Installation Template (C) as a guide.



STEP 2

- Open Junction Box (B) and remove appropriate knockout.






STEP 3

a. Thread wire clamp through knockout, secure wires with screws, attach cable connector nut on opposite side, then connect luminaire & junction wires with wire nuts (D).

Black to Black (Live) • White to White (Neutral)
No Ground required.

b. Tuck connected wires inside junction box and close the cover.



STEP 4


For Selectable Models:

Slide CCT switch to select desired color temperature.
Insert junction box through ceiling hole.

New Construction: Secure to studs, joists, or similar fixed structural units.


Remodel: Do not require to secure to studs, joists, or similar fixed units.

Installation Guide (Cont.)



STEP 5

- Attach fixture to junction box using connector (1).
- Tighten connector by hand (2).




STEP 6

Insert junction box through the hole in the ceiling.

New Construction Applications: Junction box should be secured to studs, joists, or similar fixed structural units.

Remodel Applications: Junction box does not need to be secured.



STEP 7

- Push up spring clips and insert fixture into ceiling.
- Turn on circuit breaker and test light.

Product Details

Recommended Dimmers

| Brand | Model |
|---------|---------------|
| LEVITON | C28-6672-1LT |
| LUTRON | MACL-153M-WH |
| LUTRON | DVCL-153P-WH |
| LUTRON | MACL-153MH-WH |
| LUTRON | TGCL-153P-WH |

Scan for the full compatible dimmer list!



Specifications

| | | | |
|-------------------------|---------------|-------------------------|--------------|
| Voltage | 120 V | Average Lifetime | 50,000 Hours |
| Wattage | 10 W | Lumens | 650 lm |
| Efficacy | 65 lm/W | Power Factor | 0.7 |
| CCT | 2700K - 6000K | Moisture Rating | Damp Rated |
| Weight | 0.39 lbs | CRI | 90+ |
| Housing Material | PC | Usage | Indoor |
| Dimmable | YES | Warranty | 7 Years |

Common Troubleshooting

We've got you covered! Our troubleshooting section is here to shed some light and provide you with easy-to-follow solutions for any problem.

If you still need some assistance, feel free to contact us. Our team of lighting experts are happy to help brighten your day.

Installation

Light isn't turning on.

Double check if fixture is properly connected and circuit breaker hasn't been tripped.

Light unexpectedly fails.

Reach out to customer support.

Dimming

Light not dimming to lowest setting.

Ensure minimum dimmer load requirement is met.

Light not dimming smoothly.

Verify dimmer compatibility with fixture.

Light not compatible with dimmer switch.

Check light-dimmer compatibility.

Flickering

Light is flickering when turning on.

Check that fixture wiring connections are secure.

Light flickering with other lights on the same circuit.

Check that the lights are not overloading the circuit.

Light flickering when turned on.

Verify fixture compatibility.

Light flickering when dimmed.

Verify dimmer switch compatibility.

Buzzing

Fixture buzzing with power outages.

Verify light is connected to surge protector securely.


Fixture buzzing with appliances or electronic devices.

Look for nearby interferences that can cause buzzing. Such as televisions, radios, computers, etc.

Fixture buzzing when dimmed.

Verify dimmer switch compatibility.

Light Distribution Angle

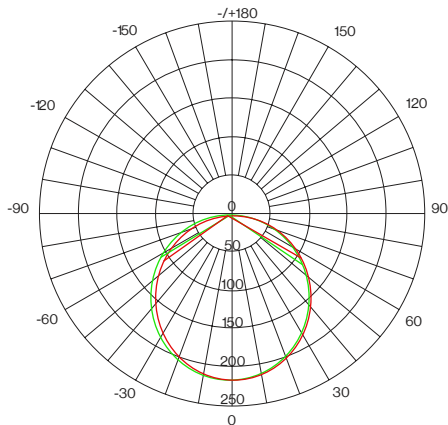

←
*Not a lighting nerd?
No worries, you can skip this page*

AVERAGE BEAM ANGLE (50%): 113.0 DEG

— C0/180 113.1°

— C90/270 112.9°

UNIT:cd Luminous Intensity Distribution 1

Lighting distribution angle refers to the spread of light emitted from a light source. It is an important factor to consider when selecting a fixture or bulb, as it affects the way it will illuminate an area. There are two main types of lighting distribution angles: A symmetric lighting distribution emits light evenly in all directions, creating a cone-shaped pattern that provides a pool of light. This type of lighting is ideal for general lighting and illuminating large areas. Common applications for symmetric lighting include general area illumination, security lighting, and perimeter lighting. Symmetric lighting is also used to a

certain degree in up-lighting. An asymmetric lighting distribution angle, also known as beam angle, creates a pattern that focuses light in a specific direction. This type of lighting is ideal for task lighting as it reduces glare and light spill in other areas. Common applications include task lighting in spaces such as landscape settings, retail stores, museums, and much more. It is important to note that the lighting distribution angle can also be affected by other factors such as the reflector design of the light source, the type of lens used, and the distance between the light source and the surface being illuminated.

Sunco

Lighting made better.

support@sunco.com
(844) 334-9938

REV10